



# MASTER LEDspot ExpertColor LV



## MASTER LED ExpertColor 6.7-35W MR16 930 24D

MASTER LEDspot LV ExpertColor creates a warm and comfortable ambience for hospitality venues, homes and restaurants. It creates such an ambience with superior lighting that has a customised spectrum, high CRI and deep dimming feature. The result? A beautiful lighting experience. What's more, the innovative, trimless lens design will suit almost any interior decor with its clean and neat look. In addition, you can take advantage of the full ExpertColor family, which also includes LEDspot MV lamps.


### Product data

General Information	
Cap base	GU5.3
Nominal lifetime	40,000 h
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
CE mark	Yes
EU RoHS compliant	Yes
Light Technical	
Colour Code	930 [CCT of 3000K]
Beam angle (nom.)	24 degree(s)
Luminous Flux	440 lm
Luminous intensity (nom.)	2,200 cd
Colour designation	White (WH)
Correlated Colour Temperature	3000 K
Luminous efficacy (rated) (nom.)	65.00 lm/W
Colour consistency	<3
Colour rendering index (CRI)	
LLMF at end of nominal lifetime (nom.)	70 %
Luminous flux in 90° cone (rated)	440 lm
Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	- Hz
Input frequency	- Hz
Power Consumption	6.7 W
Lamp current (nom.)	650 mA
Wattage equivalent	35 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (nom.)	ac electronic 12 V

# MASTER LEDspot ExpertColor LV


Temperature	
T-Case maximum (nom.)	92 °C
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb shape	MR16
Approval and Application	
Energy Efficiency Class	G
Suitable for accent lighting	Yes
Energy consumption kWh/1,000 hours	7 kWh
EPREL registration number	624214
EyeComfort	Yes
Application Conditions	
Can it be used in closed luminaires	No

## Dimensional drawing

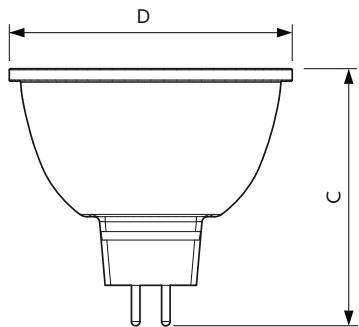


Product	D	C
MAS LED ExpertColor 6.7-35W MR16 930 24D	50.5 mm	46 mm

## Photometric data

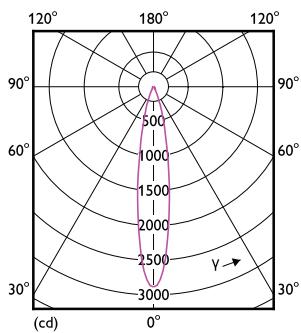


Light Distribution Diagram - MAS LED ExpertColor 6.7-35W MR16 930 24D

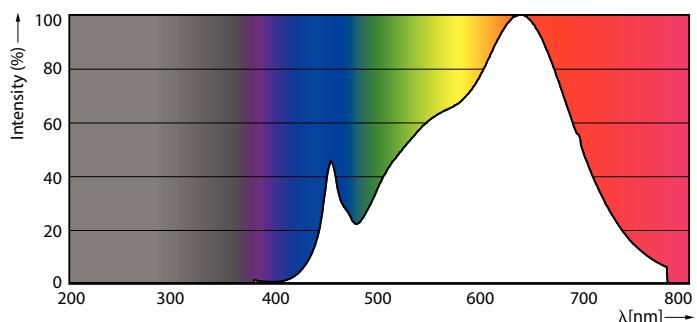

Spectral Power Distribution Colour - MAS LED ExpertColor 6.7-35W MR16 930 24D

# MASTER LEDspot ExpertColor LV



## Photometric data



Product Photometrics 4.0 Philips Lighting N.V. Page 1/1

## Accent Lighting Spots - MAS LED ExpertColor 6.7-35W MR16 930 24D

## Lifetime

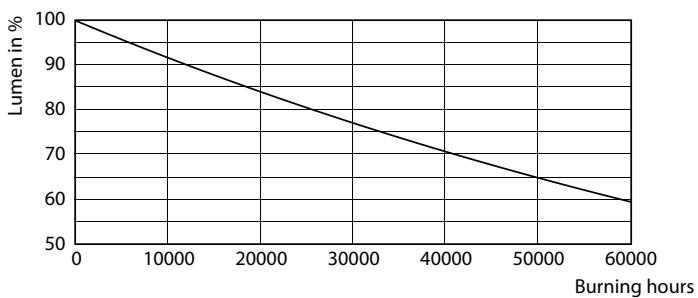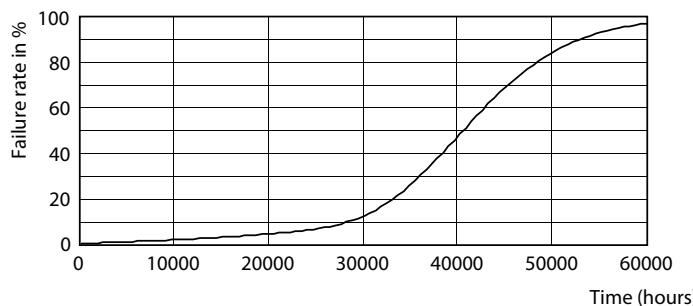

## Life Expectancy Diagram - MAS LED ExpertColor 6.7-35W MR16 930 24D

## Lumen Maintenance Diagram - MAS LED ExpertColor 6.7-35W MR16 930 24D

