



DNG485

RS-485/DMX512 Gateway

Wall mount flexible network communications gateway


The Philips Dynalite DNG485 is a flexible network communications bridge designed for RS-485 networks. The two opto-isolated RS-485 ports enable the DNG485 to implement a trunk and spur topology on large project sites, with the bridge providing a high-speed backbone opto-coupled to many lower speed spurs.

DNG485

Wall mount flexible network communications gateway

- **Increased network security** – Definition of packet filtering rules for each direction provides augmented security and robustness.
- **Route DyNet to third-party systems** – Such as audio-visual, Somfy blind controllers, Modbus meters and building automation systems, providing an integrated approach to total building control and energy management.
- **DMX512 mode** – Transmit or receive up to 64 channels of DMX512, with automatic DyNet conversion and task triggering.
- **Electrical fault isolation** – Faults can be isolated to individual network spurs.
- **Internal controls** – Programmable logic controller capable of comprehensive conditional and sequential logic and arithmetic function processing, packet filtering and DyNet to DyNet 2 translation.

Dimensions

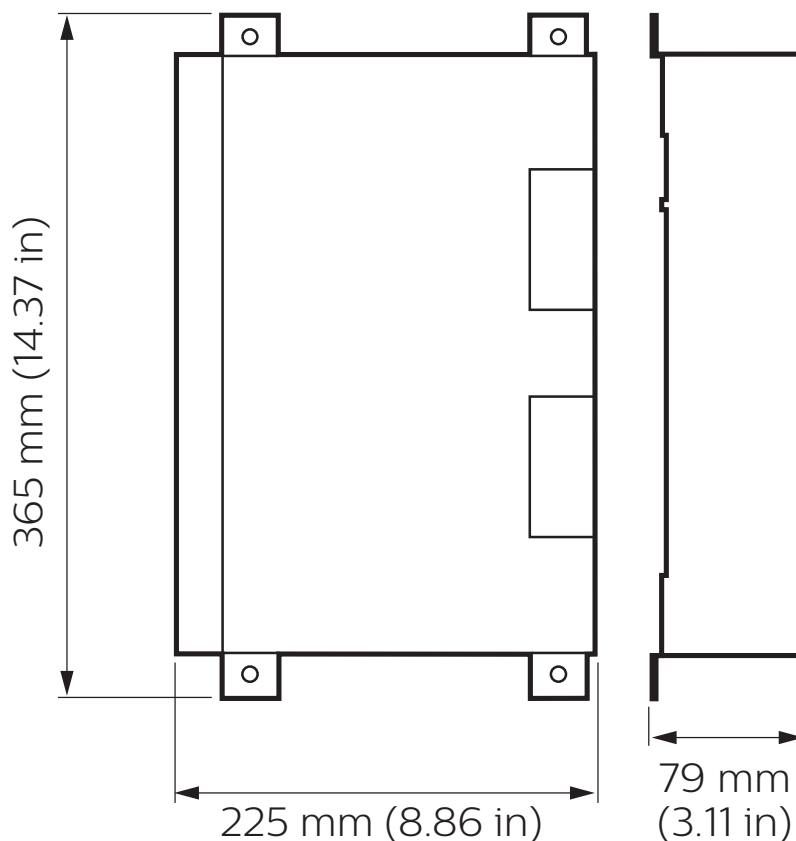

Specifications

Due to continuous improvements and innovations, specifications may change without notice.



DNG485
RS-485/DMX512 Gateway

Electrical

Supply Type	Single-phase
Supply Voltage	240 VAC
Supply Current	100 mA
Serial Port Isolation	Optical (3.75 kV RMS)
DyNet DC Output Voltage	12 VDC
DyNet DC Output Current	Port 1: 450 mA Port 2: 180 mA
IEC Overvoltage Category	III

Control

Communication Ports	2 x RS-485
Supported Protocols	DyNet DyNet2 DMX
DMX Tx Channels	64
DMX Rx Channels	64
Dry Contact Inputs	1 (AUX)
User Controls	1 x service switch
Indicators	1 x service LED
Diagnostic Functions	Device online/offline status

Physical

Dimensions (H x W x D)	320 x 225 x 79 mm (12.60 x 8.86 x 3.11 in)
Packed Weight	3.10 kg (6.83 lb)
Construction	Alloy/Steel wall mount case Epoxy finish
Communication Ports	1 x RJ12 11 x screw terminal
Communication Terminal Conductor Size	2.5 mm ² (#12 AWG) (max)
Supply Terminals	2 x screw terminal
Supply Terminal Conductor Size	4 mm ² (#11 AWG) (max)
Earth Bar	7 x screw terminal


Environment

Operating Temperature	-0° to 50°C ambient (32° to 122°F)
Storage/Transport Temperature	-25° to 70°C ambient (-13° to 158°F)
Humidity	0 to 95% non-condensing
IEC Pollution Degree	III

Compliance

Certification	CE, RCM, RoHS
---------------	---------------

Electrical

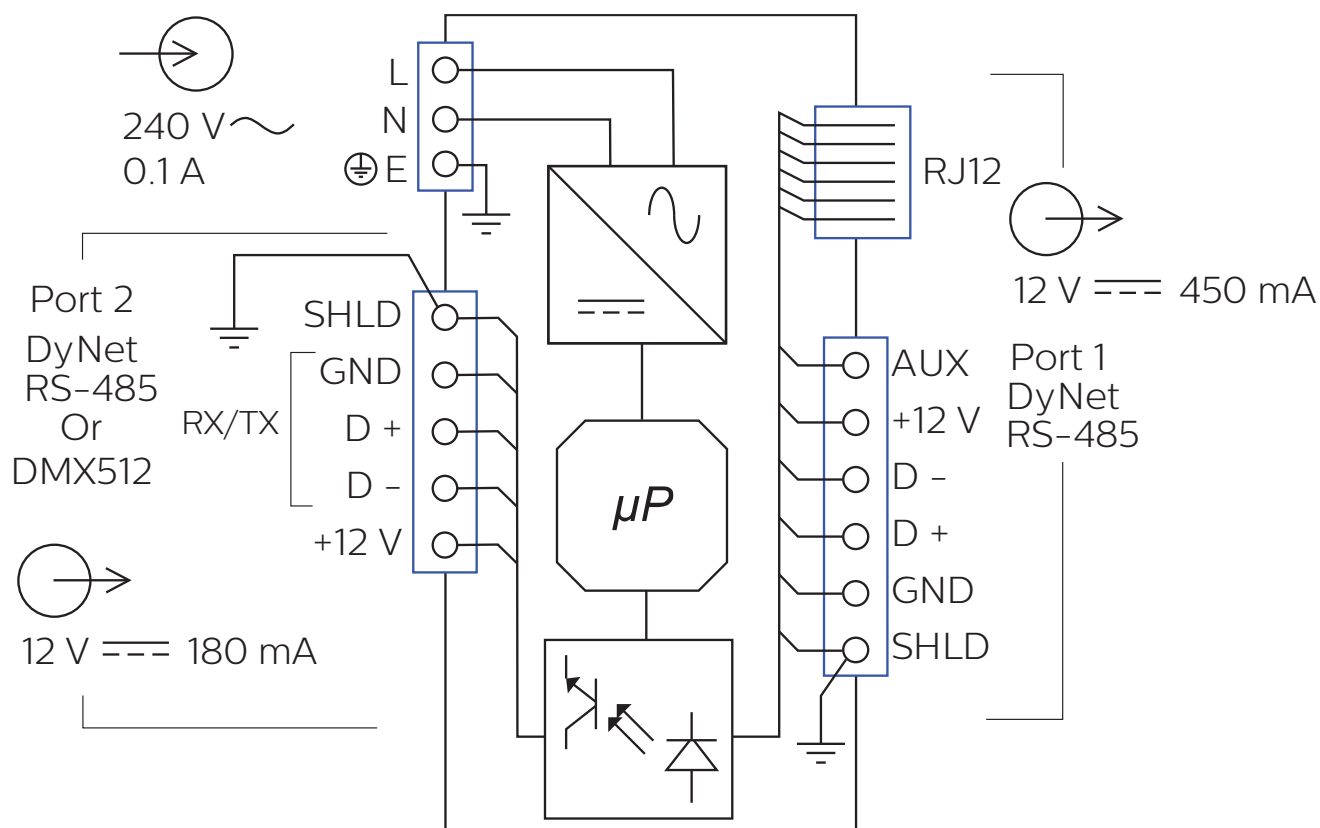

Ordering Code

Product

DNG485

Philips 12NC

913703082209



© 2018 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.