
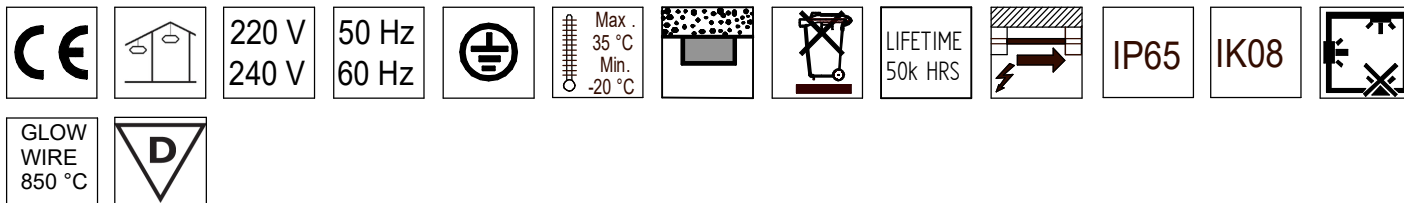


PHILIPS

CoreLine Waterproof

WT120C

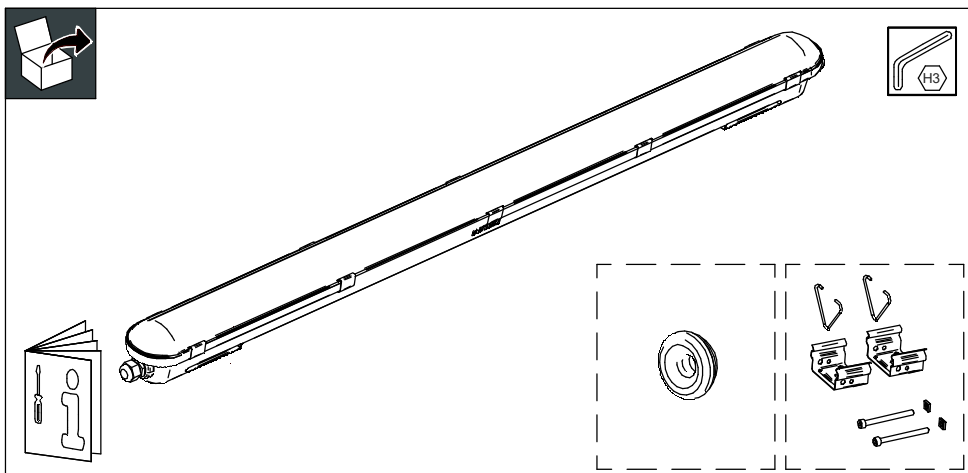

	System light output (Lm)	Color temperature (K)	kg
WT120C LED22S/840 PSU TW3 L1200	2900	4000	1,6
WT120C LED40S/840 PSU TW3 L1200	4100	4000	1,6
WT120C LED34S/840 PSU TW3 L1500	3500	4000	1,9
WT120C LED60S/840 PSU TW3 L1500	6000	4000	1,9
WT120C LED80S/840 PSU TW3 L1500	8000	4000	1,9

The diagram illustrates the dimensions of the WT120C LED strip light. The side view on the left shows a long, thin profile with a central row of LEDs. Dimensions are labeled as follows: A is the height of the main body; B is the total length; C is the width of the main body; D is the width of the mounting bracket; E is the length of the mounting bracket; F is the distance between the mounting brackets; and L is the total length including the mounting brackets. The end view on the right shows the mounting bracket with a central screw hole and a semi-circular cutout at the bottom.

Type	Dimension (mm)						Nr. of clips			
	A	B	C	D	E	F				
WT120C LED18S L600	82	661	87	38	388	96	6			
WT120C LED22S L1200		1250			960		10			
WT120C LED40S L1200		1530			1213		12			
WT120C LED34S L1500										
WT120C LED60S L1500										
WT120C LED80S L1500										

