

**PHILIPS**  
**Day-Brite**  
**CFI**

Industrial

Vaporlume LED DW



# Bringing reliable, rugged efficiency **to your industry**

**Philips Day-Brite / Philips CFI Vaporlume LED** sealed industrial DW is a specialized wet location, IP rated product designed for use in both indoor and outdoor environments. It is a wet location listed, non-corrosive luminaire available in both fluorescent and LED light sources.

## Features

- Industry leading efficacy up to 121lm/W.
- 8' tandem units available to reduce installation costs and enhance TCO.
- Wide optic (WHP) is ideal for parking garages and applicable to significant utility rebates.
- Acrylic diffused lens (L) available to further reduce LED pixilated glare and enhance visual comfort. Results in 3-5% decrease in luminous output.
- 7000lm high lumen package equivalent to 2x54W T5HO at room temperature.
- Vaporlume LED is an ideal choice over fluorescent providing instant on full brightness even in cold temperature applications.

## Benefits

- Non-Corrosive Housing
- IP rated
- NSF listed
- DesignLights Consortium listed

## Applications

- Food Handling Facilities
- Cold Storage
- Industrial
- Parking Garages
- Canopy
- Mass Transit Terminals



# DW Vaporlume LED

## Ordering guide


Example: V2WAE51L840-4-UNV-MD360W

Family	Listing	Lens	Hubs Installed	Source	Color	Length <sup>1</sup>	Voltage	Dimming	Options
<b>D</b>	<b>W</b>		<b>E</b>						
<b>D</b> Fiberglass Industrial	<b>W</b> Wet Location	<b>A</b> DR Acrylic <b>P</b> Polycarbonate <b>L</b> Enhanced LED Acrylic (Available on 4ft and 8ft lengths only)	<b>E</b> Ends only	<b>27L</b> 2700 nominal lumens <b>35L</b> 3500 nominal lumens <b>43L</b> 4300 nominal lumens <b>51L</b> 5100 nominal lumens (25°C ambient) <sup>2</sup> <b>51LH</b> 5100 nominal lumens (-35°C to 40°C) <sup>2</sup> <b>70L</b> 7000 nominal lumens <sup>2</sup>	<b>830</b> 80 CRI, 3000K <b>835</b> 80 CRI, 3500K <b>840</b> 80 CRI, 4000K <b>850</b> 80 CRI, 5000K	<b>2</b> 2 feet <b>4</b> 4 feet <b>8</b> 8 feet	<b>UNV</b> Universal Voltage, 120-277 volt <b>347</b> 347 volt <sup>3</sup> <b>480</b> 480 volt <sup>3</sup>	<b>blank</b> 0-10v <b>SDIM</b> 100/40 step dim <sup>4</sup>	<b>MD360W</b> Wet location occupancy sensor, external <b>WHP</b> Wide Beam Optic <b>EMLED</b> Integral Emergency <sup>5</sup> Protection against effect of immersion <b>IP67</b>


- The 2ft length is available with 27L only. The 4ft length is available with 35L, 43L, 51L, 51LH, and 70L. The 8ft length is available with 51L, 51LH, and 70L.
- Nominal lumen option codes are for 4ft fixture. Double for 8ft tandem.

- All 347V and 480V models available only for (-20°C to 25°C) ambient. Not available for use with 51LH or SDIM options or 2ft models.
- Step dim (SDIM) not available with 51LH or 2ft options.
- Integral Emergency (EMLED) not available with 347V, 480V or 2ft options.


## Dimensions – 2ft

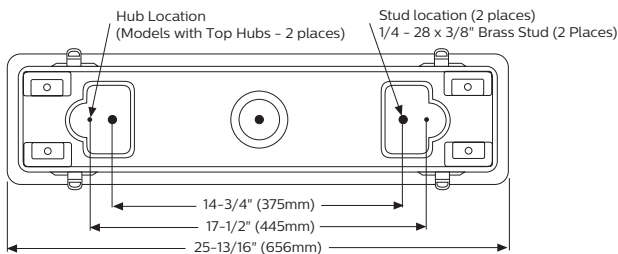


## Dimensions – 2ft (side profile)

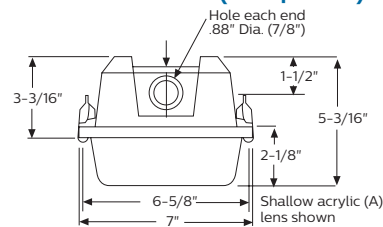


## Dimensions – 4ft

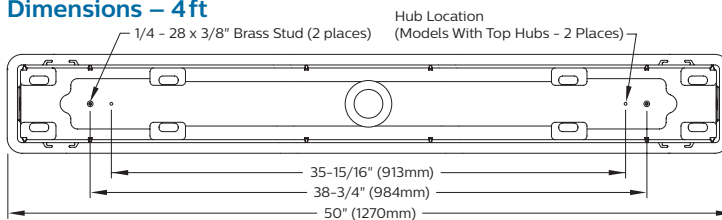

## Dimensions – 4ft & 8ft (side profile)

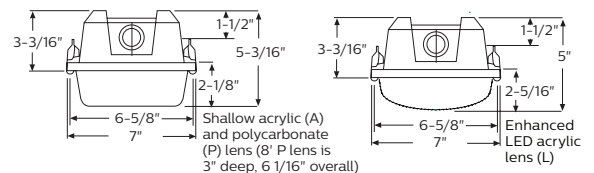

## Dimensions – 8ft

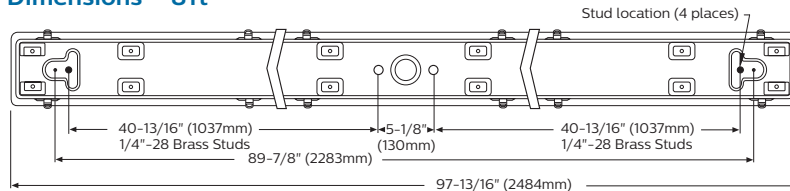

## Accessories (order separately)

- TBK** Stainless Steel Top Bracket Kit (pair of brackets plus hardware)
- EBK** Stainless Steel End Bracket Kit (pair of brackets plus hardware)
- WBK** Stainless Steel Wraparound Bracket Kit (pair of brackets)
- FKR-126** Chain Hanger Set (requires TBK)

© 2016 Philips Lighting Holding B.V. All rights reserved.  
Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.



Philips Lighting North America Corporation  
200 Franklin Square Drive, Somerset, NJ 08873  
Tel. 855-486-2216

Philips Lighting Canada Ltd.  
281 Hillmount Rd, Markham, ON, Canada L6C 2S3  
Tel. 800-668-9008