


Linear

TruGroove Surface

3200 lm/4ft, Direct 3000/3500/4000K






Project:		
Spec Type:		
Catalog No:	2911LxEQN	
Qty		
Line Notes:		

TruGroove Recessed is driving performance beyond the edge. Innovative optics deliver exceptional uniformity and wide row spacing from a 3" aperture continuous line-of light. An extended family and refined design are perfect for lighting any professional space.

Ordering guide

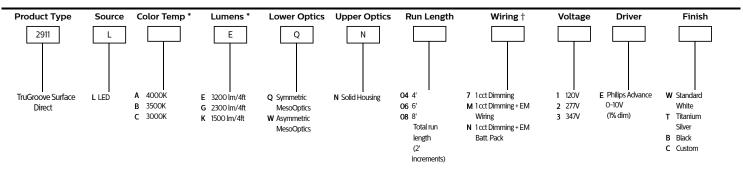

* Nominal values within a range. Consult photometry data for color temp, lumens & distribution of chosen configuration.

[†] Not all wiring types are available with all configurations. Consult Philips Ledalite for a complete list of available options.

Mounting Hardware

Mount Type Consult separate mounting spec sheet for mount type options	
Endcaps - Flat Grooved	Integrated Controls Please indicate with check mark.
Indirect Endcap Direct/Indirect 3.24° (82.4mm) 4.82,4mm) 0.2° (5mm) 0.2° (5mm) 0.2° (5mm)	Response Daylight Single Zone (DS)SpaceWise DT Occupancy & Daylight Sensor (SZ)



3200 lm/4ft, Direct 3000/3500/4000K

Optical System

Upper hemisphere: White light emitted from a linear array of upward-facing LEDs is shaped into a homogeneous, wide-throw batwing distribution using either a freeform elliptical lens or an engineered light guide panel. Lower hemisphere: White light emitted from a linear array of downward-facing LEDs is laterally redirected using either a biconvex lens or optical microstructures embedded in a layer of MesoOptics DX film. An extruded acrylic lens and MesoOptics film assembly then generates an optimal batwing distribution and a uniform continuum of light.

Endcaps

Diecast flat aluminum endcaps with integral groove to match housing.

Finish

High quality powder coated, available in matte white, black or titanium silver. Other custom colors available on request. White sensors only.

Housing

Precision aluminum extrusion, post painted.

Weight

Maximum: Suspended & Surface 3.9lb/ft, Wall 4.1lb/ft & 2'x2' Corner unit 21lb

Electrical

Factory pre-wired to section ends with quick-wire connectors.

Standard Drivers

Philips Advance Xitanium 0-10V, 1-100%. Philips Advance Xitanium SR, 5-100% (for SpaceWise DT).

Class 2 rated output. Consult Philips Ledalite for other available drivers.

Standard Battery Pack

Philips Bodine, 90 min, 10W, Class 2 rated output, Emergency lumen output = 10W x luminaire efficacy x 1.1. Typical output: 1100lm.

Lumen Maintenance

At an ambient temperature of 25°C, the LED lumen maintenance expectation according to IES TM-21-11 is: L₈₀ (12k) 60,000 hrs (**Reported** methodology) L₈₀ (6k) 110,000 hrs (**Projected** methodology).

Source Color

LEDs rated for color rendering CRI >80, R9 >0 and fixture to fixture color accuracy within 2 SDCM.

Controls

Suspended version available with the following integrated controls:

Response daylight sensor (for single zone). SpaceWise DT occupancy & daylight sensor w/

advanced grouping & dwell time. SpaceWise DT commissioning via Android phone and

Philips Field App. Compatible dimming wireless wall switches are available. For more information, please refer to www.philips.com/spacewise

Mounting

Suspended: Variable sling mount allows +/- 5" of horizontal adjustment from joint or end. Aircraft cable and tamper-resistant gripper provide unlimited vertical adjustment and are independently tested to stringent safety standards.

Wall: A hidden steel rail and bracket system attaches to the existing structure and supports housings close to the wall. Mount positioning is fully variable along the modules to accommodate site conditions, spaced up to 4¹/₂' on center and within 12" of an end or joint. Surface: Fixture is mounted flush to surface using hidden brackets that attach to existing structure, variable between 0.6"-1.7" from end or joint.

Joints

Self-aligning joining system with hands-free pre-joining wire access.

Approvals

Certified to UL, CSA and IES standards. Certain symmetric indirect/direct and indirect versions are DesignLights Consortium[®] qualified. Please see the DLC QPL list for exact catalog numbers (www.designlights.org/QPL).

Warranty


Philips indoor professional luminaires 5 year LED warranty: http://www.philips.com/warranties

Environment

Rated for dry or damp locations in operating ambient temperatures 0-40°C (32-104°F). Certain luminaire components may be adversely affected by contaminants. Damage caused by sulfur, chlorine, petroleum based solutions or other contaminants in the area of operation are not covered under warranty. Not suitable for natatorium environments.

Due to continuing product improvements, Philips Ledalite reserves the right to change the specifications without notice.


Dimensions - Cross Section



3200 lm/4ft, Direct 3000/3500/4000K

Dimensions - Modules

Surface Mount Without Endcaps - Side View

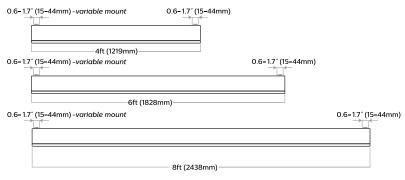


3200 lm/4ft, Direct 3000/3500/4000K

Photometry - 3500K

Candela Distribution

90-
45 <u></u> 90 <u></u>

0% Up / 100% Down



Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F46Z-REGK7K (1/26/2015) Model Number: 29x1LBEQN Type: Luminaire - Linear

Vertical		Zonal				
Angle	0	22.5	45	67.5	90	Lumens
0	1043	1043	1043	1043	1043	0
5	1041	1041	1048	1057	1057	100
15	980	1005	1077	1137	1155	304
25	868	935	1095	1216	1254	497
35	722	827	1054	1189	1209	629
45	573	683	906	955	933	634
55	432	510	643	643	620	519
65	290	321	375	378	364	349
75	144	151	171	173	166	174
85	29	29	36	36	36	41
90	0	0	0	0	0	0
95	0	0	0	0	0	0
105	0	0	0	0	0	0
115	0	0	0	0	0	0
125	0	0	0	0	0	0
135	0	0	0	0	0	0
145	0	0	0	0	0	0
155	0	0	0	0	0	0
165	0	0	0	0	0	0
175	0	0	0	0	0	0
180	0	0	0	0	0	0

90	Lumens	Values per 4ft unit
1043	0	1
1057	100	Fixture photometry has been
1155	304	
1254	497	conducted in accordance with
1209	629	IESNA LM-79-08
933	634	IESNA LIVI-79-00
620	519	
364	349	IES files for this and other
166	174	photometric options can be
36	41	
0	0	downloaded online at
0	0	www.lightingproducts.philips.com
0	0	www.ugrungproducts.philips.com

Coefficients of Utilization (%)

DCD	Ceiling:		8	0			70			50		0
RCR	Wall:	70	50	30	10	70	50	30	50	30	10	0
0		119	119	119	119	116	116	116	111	111	111	100
1		109	105	101	97	107	103	99	98	95	92	85
2		100	92	85	80	97	90	84	86	81	77	71
3		91	81	73	67	89	79	72	76	70	65	60
4		83	72	63	57	81	70	62	68	61	55	52
5		77	64	55	49	75	63	55	61	54	48	45
6		71	58	49	43	69	57	48	55	48	42	39
7		66	52	44	38	64	51	43	50	42	37	35
8		61	48	39	33	60	47	39	46	38	33	31
9		57	44	35	30	56	43	35	42	35	30	28
10		53	40	32	27	52	40	32	39	32	27	25

Avg. Luminance (cd/m2)

0		•	'	1
Vertical	H	Horizontal Ang	gle	
Angle	0	45	90	
55	8086	12045	11624	
65	7374	9546	9260	
75	5973	7094	6907	
85	3603	4435	4435	
85	3603	4435	4435	

Distribution

Hemisphere	0% Up / 100% Down
Spacing Along (0 °)	1.15
Spacing Across (90 °)	1.63

3200 lm/4ft, Direct 3000/3500/4000K

Optical Performance

Nominal CCT:	3000K	3500К	4000K
Flux (lm)	3140	3247	3257
Efficacy (lm/W)	90.0	93.0	92.0
Power (W)	34.9	34.9	35.4
ССТ (К)	3118	3424	4065
CRI	81	82	83
R9	2	6	13
x	0.4309	0.4128	0.3787
У	0.4059	0.4010	0.3791
Duv	0.0020	0.0030	0.0020

Electrical Performance - 3500K

Input Voltage	120V	277V	347V			
Input Power	34.9W	34.3W	31.6W			
Input Current	0.29A	0.13A	0.09A			
Power Factor	0.995	0.970	0.960			
Total Harm. Distortion	5.9%	12.4%	10.0%			
Tested values . contact technical support for rated values. Off-state power zero unless certain controls are specified.						

With SpaceWise DT, standby power <0.5W (120V) or <0.8W (277V).

© 2017 Philips Lighting Holding B.V. Il rights reserved. Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication. www.philips.com/luminaires



Philips Lighting, North America Corporation 200 Franklin Square Drive, Somerset, NJ 08873 Tel. 855-486-2216

Philips Lighting Canada Ltd., 281 Hillmount Rd, Markham, ON, Canada L6C 2S3 Tel. 800-668-9008