



Mini LED Platform: compact performers

Mini Iridium LED, Mini Koffer² LED, Mini Milewide LED, Mini Modena LED

PHILIPS
sense and simplicity





Mini LED Platform – the best residential area solution

With more than 30,000 luminaires already installed in the field over the past two years, these Mini LED luminaires are becoming the benchmark for residential street lighting. The upcoming new generation will allow maximum energy savings thanks to better efficacy and more flexibility in application, with new optics and additional control options.

The modularity of the Mini LED Platform luminaires allows you to upgrade your lighting installation quickly and easily whenever you want, simply by changing the light engine.


Thanks to the variety offered by this platform – Mini Iridium LED, Mini Koffer² LED, Mini Milewide LED and Mini Modena LED – there is a wide range of designs to ensure the luminaire suits the look and feel of your street architecture, with the same best-in-class performance.

Mini LED Platform new generation: maximum energy savings and broader application scope

The brand new generation of Mini LED Platform luminaires offers the same flexibility as LEDGINE 2.0 luminaires and similar levels of performance to meet all your needs:


	Green Line	Economy Line
Benefits	Maximum energy savings	Investment / energy savings trade off
Source Efficacy (lm/W)	up to 125 lm/W	up to 116 lm/W
LER - Luminaire Efficacy Rating (lm/W)	up to 87 lm/W	up to 85 lm/W
Power system (W)	up to 29 W	up to 41 W
Lumen depreciation at 60,000 hours	L90	L85
Lighting Distribution	MSO (Medium Street Optic < 6 m width) WSO (Wide Street Optic > 6 m width)	MSO (Medium Street Optic < 6 m width) WSO (Wide Street Optic > 6 m width)
Colour Temperature	Warm White (3000 K) Neutral White (4000 K) Cool White (5700 K)	Warm White (3000 K) Neutral White (4000 K) Cool White (5700 K)

Brand new optics have been designed to greatly increase the scope of application, allowing the Mini LED luminaires to be used in major residential street configurations, and other applications. Mounting heights range from 3.5 to 6 metres.

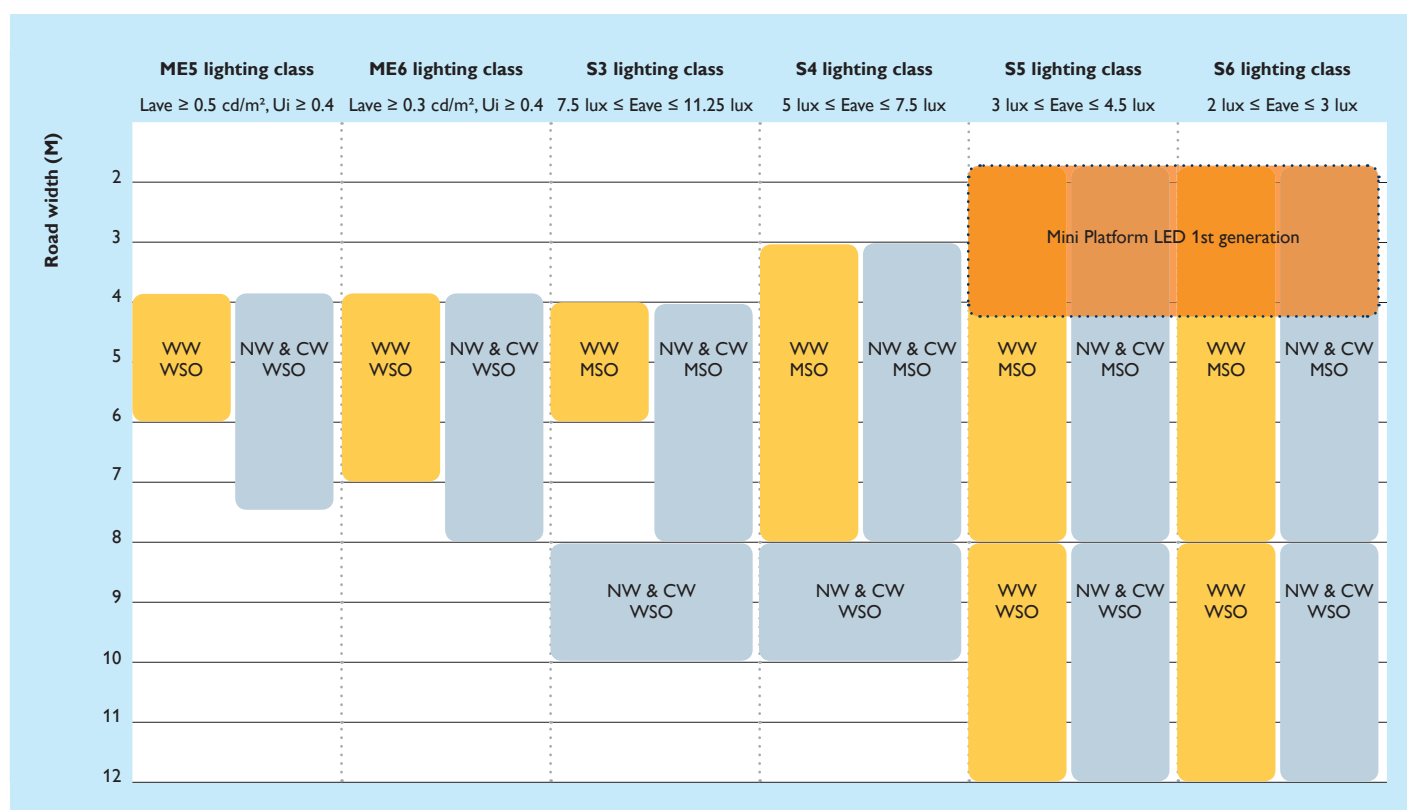


Mini LED Platform new generation: more control devices

A good lighting system generates precisely the right level of light in the right place at the right time. Dynamic lighting control is an ideal means of saving energy without affecting light uniformity or safety. The Mini LED luminaire control devices have been optimised thanks to a new dedicated electronic driver.

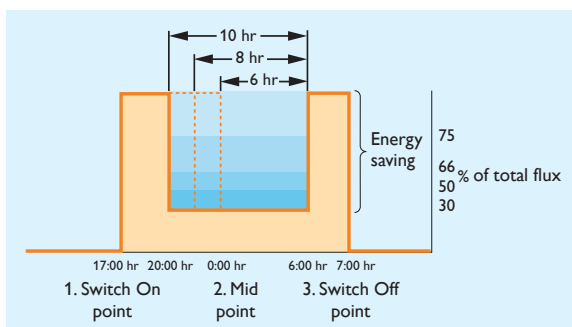

Lumistep: stand-alone dimming device.

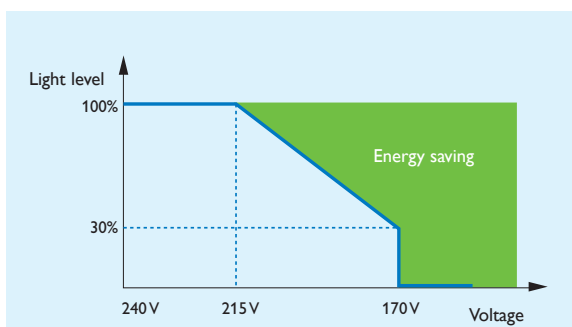

Mains dimming option.

Constant Light Output (CLO)

The CLO function has been integrated into the driver, enabling the light depreciation of the LED to be controlled throughout its life. This represents an additional energy saving of up to 15% without any reduction in the required lighting level.

Lumistep

Lumistep is a stand-alone dimming device that can easily give rise to as much as 20% savings on your electricity bill. Different timelines are suggested for different levels of dimming. These are pre-programmed by the factory.

Mains dimming


This new option enables you to dim the light down by reducing the mains input. This allows you to install LED luminaires in installations already set up with mains dimming or to use our new Amplight to monitor and control groups of light points at a competitive price.

Telemanagement

The new electronic driver used in this new generation of Mini LED luminaires allows external dimming via 1-10V, making it possible to connect telemanagement systems such as an OLC (Outdoor Luminaire Controller) which is installed in the column, or in the near future via an RF antenna. These are our state-of-the-art control systems, which allow full control and monitoring of each light point.



Best performances and Total Cost of Ownership (TCO) for residential areas

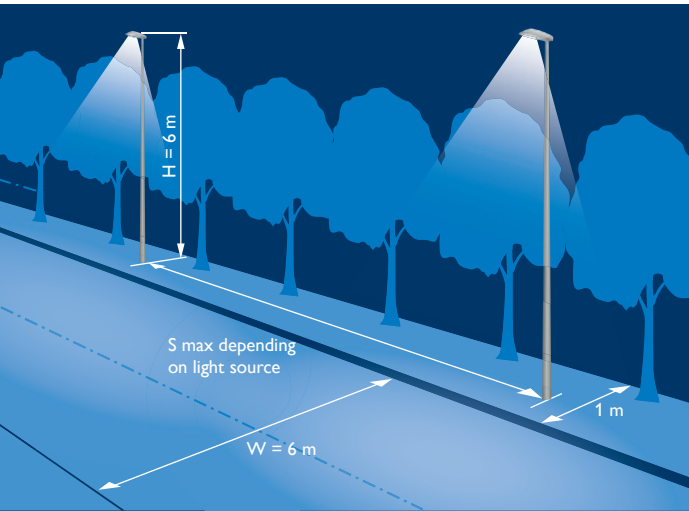

Mini LED Platform in application:


- Lighting class: S4 (5 lux ≤ Eave ≤ 7.5 lux)
- Carriageway: single
- Number of lanes: 2
- Adjacent pavements on each side

An installer was asked by a local authority to renovate an old S4-class HPL 80 W mercury lamp installation. The existing configuration featured a 6 metre mounting height and 26 metre column spacing.


We studied two different scenarios:

- Scenario 1: direct replacement of the luminaires with Iridium SGS252 SON-T 50 W EM, Mini Iridium SGS451 CPO-TW 45 W and Mini LED Platform upgrade GRN29-2S/740.
- Scenario 2: A new installation, seeking optimisation of the spacing between poles for each of the following luminaires: Iridium SGS252 SON-T 50 W EM, Mini Iridium SGS451 CPO-TW 45 W and Mini LED Platform upgrade GRN29-2S/740.

Mini LED Platform new generation enables up to 70% energy savings compared with an old HPL installation and is approximately 50% more efficient than a SON-TPP luminaire in a retrofit case.

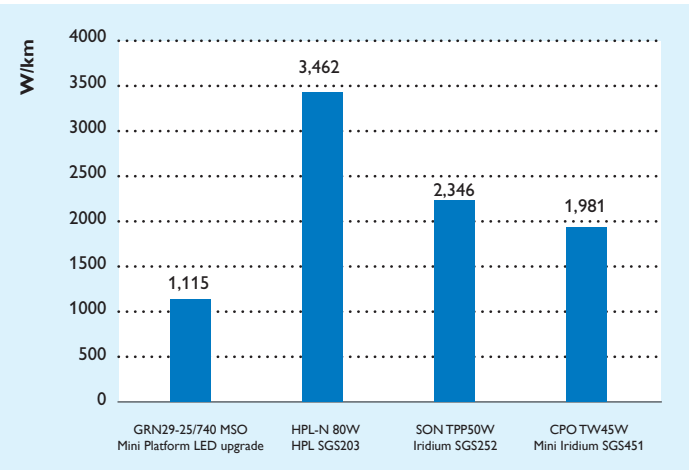

Scenario 1: Energy efficiency of the Mini LED Platform new generation vs. conventional solution in a retrofit installation.

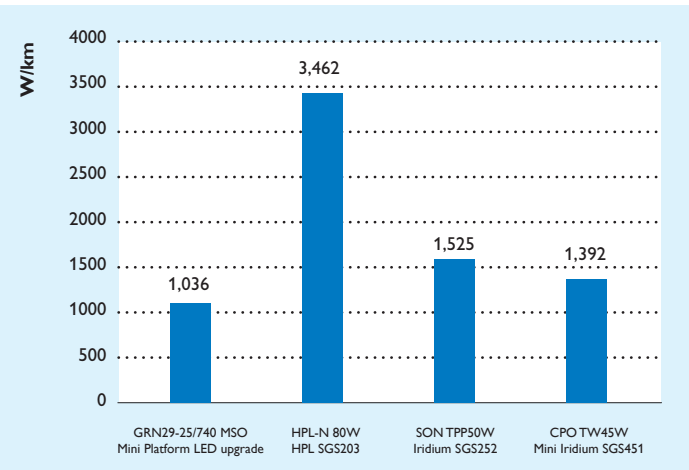


Scenario 2: Energy efficiency of the Mini LED Platform new generation vs. conventional solution in a new installation.




Main specifications

Main specifications		Options
IP of the luminaire	IP66	All RAL or AKZO colours
Mechanical resistance	IK07	Minicell
Nominal voltage	240V – 50/60 Hz	
Electrical class	I	
Glass cover	PMMA	
Housing	Aluminum	
Standard colour:		
• Mini Iridium LED	Grey (RAL 7035)	
• Mini Koffer ² LED	Grey (RAL 7035)	
• Mini Milewide LED	Urban light grey	
• Mini Modena LED	Silver grey	
Opening of the luminaire:		
• Mini Iridium LED	Opens downwards	
• Mini Koffer ² LED	Opens downwards	
• Mini Milewide LED	Opens upwards	
• Mini Modena LED	Opens downwards	
Mounting height	3.5 to 6 m	
		Controls
		Constant Light Output (CLO)
		Lumistep
		Mains dimming
		External dimming 1-10V
		Dynadimmer
		Telemanagement with RF antenna

Mini Iridium LED

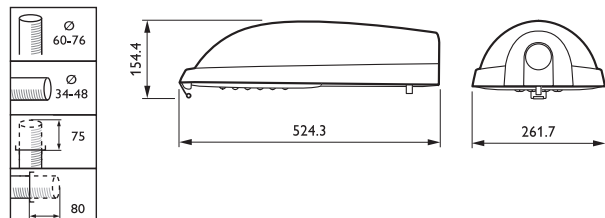


Mini Milewide LED

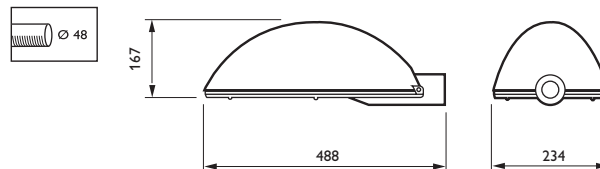


Installation	
Post top position	10°
Post top diameter	60 and 76 mm
Side entry position	0°
Side entry diameter	up to 48 mm
Fixation	1 M10 screw

Installation	
Side entry position	0°
Side entry diameter	up to 48 mm
Fixation	2 M10 screws

Mini Modena LED

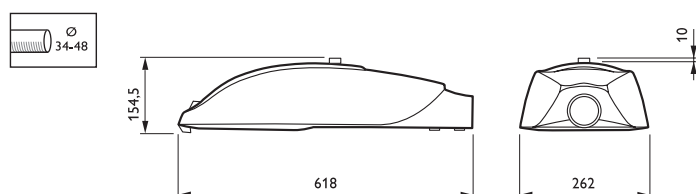

Mini Koffer² LED

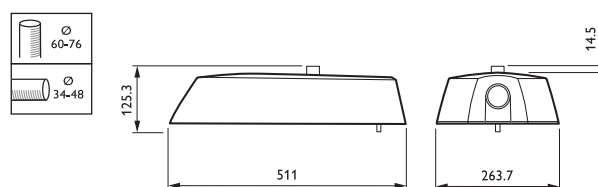

Installation	
Side entry position	0°
Side entry diameter	up to 48 mm
Fixation	2 M10 screws

Installation	
Post top position	10°
Post top diameter	60 and 76 mm
Side entry position	0°
Side entry diameter	up to 48 mm
Fixation	1 M10 screw

Contact details:
Philips Lighting
Philips Centre
Guildford Business Park
Guildford
Surrey
GU2 8XH

Tel: 0845 601 1283
Fax: 01483 575534
lighting.uk@philips.com
www.philips.co.uk/lighting



© 2011 Koninklijke Philips Electronics N.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.

Document order number: 3222 635 69154

07/2011

Data subject to change.

www.philips.com/catalog