



**PHILIPS**  
**Stonco**

Wall Mount

LytePro LED Sconces



# Brighten your facade with LytePro Sconces

The LytePro LED sconce family is available in three sizes, providing high quality white illumination and a sense of security for any wall mount application.

## Features

- Architectural wall mount luminaires, available in three sizes to accommodate multiple mounting heights
- Lumen packages range from 1,154 to 6,913 with efficacies of 82LPW to 98LPW
- Button Photocell and Motion Response available for additional energy savings<sup>1</sup>
- Standard luminaires are available in two textured finishes: bronze and dark gray
- California Title 24 compliant solutions in all three sizes
- All models are DLC qualified
- 5 year limited warranty


1. Available options vary by size and model.

## Benefits

- Low-profile design to complement or blend in with surroundings
- Provides energy saving replacement for incandescent, compact fluorescent and HID lamp sources up to 250W
- Optical distributions provide full cutoff performance and excellent uniformity for optimal wall and area illumination
- Easily mounts to a variety of junction box types or fastens directly to wall for seamless retrofitting
- Outstanding long life (L70 > 100,000 hours) provides maintenance savings

The Philips Stonco LytePro LED Outdoor Wall Sconce (LPW) combines excellent performance, design and value to meet the needs of the energy and budget conscious. LytePro LED Sconces are best suited for use in downward facing, surface wall mount applications, over recessed junction boxes or where power can be directly fed through back surface, whereby connection splices can be made inside the luminaire housing.

A variety of models are available across three different sizes.

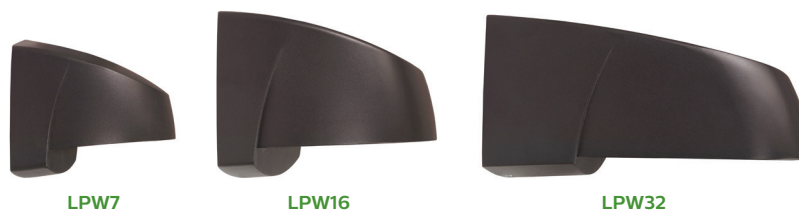

## Ordering Guide

### Stocked Luminaires

Catalog Number	Description	UPC Code
<b>LPW7</b>		
<b>LPW7-8BZ</b>	LPW7, 14W COB LED, 350mA, 4000K, 120-277V, Textured Bronze finish	786034960441
<b>LPW7-8DGY</b>	LPW7, 14W COB LED, 350mA, 4000K, 120-277V, Textured Dark Gray finish	786034960458
<b>LPW7-1BZPCB</b>	LPW7, 14W COB LED, 350mA, 4000K, 120V, Textured Bronze finish, Button Photocell	786034960472
<b>LPW16</b>		
<b>LPW16-58BZ</b>	LPW16, 16 LED, 30W, 530mA, 4000K, 120-277V, Textured Bronze finish	786034960540
<b>LPW16-51BZPCB</b>	LPW16, 16 LED, 30W, 530mA, 4000K, 120V, Textured Bronze finish, Button Photocell	786034960557
<b>LPW16-78BZ</b>	LPW16, 16 LED, 40W, 700mA, 4000K, 120-277V, Textured Bronze finish	786034960502
<b>LPW16-78DGY</b>	LPW16, 16 LED, 40W, 700mA, 4000K, 120-277V, Textured Dark Gray finish	786034960489
<b>LPW16-71BZPCB</b>	LPW16, 16 LED, 40W, 700mA, 4000K, 120V, Textured Bronze finish, Button Photocell	786034960519
<b>LPW32</b>		
<b>LPW32-78DGY</b>	LPW32, 32 LED, 71W, 700mA, 4000K, 120-277V, Textured Dark Gray finish	786034960564
<b>LPW32-78BZ</b>	LPW32, 32 LED, 71W, 700mA, 4000K, 120-277V, Textured Bronze finish	786034960588
<b>LPW32-71BZPCB</b>	LPW32, 32 LED, 71W, 700mA, 4000K, 120V, Textured Bronze finish, Button Photocell	786034960595
<b>LPW32-7DTBZMR</b>	LPW32, 32 LED, 71W, 700mA, 4000K, 120 or 277V, Textured Bronze finish, Motion Response	786034960601
<b>LPW32-78WH</b>	LPW32, 32 LED, 71W, 700mA, 4000K, 120-277V, Textured White finish	786034960571

### Stocked Accessories (Must be ordered separately)

Catalog Number	Description	UPC Code
<b>Available for use with LPW7, LPW16, LPW32</b>		
<b>LPWCVRPLT-BZ</b>	LPW Universal wall cover mounting plate, Textured Bronze finish	786034960618

## Description of catalog codes (For reference only)

Family	Drive current	Voltage	Finish	Options
LPW7 = LytePro 7 LED Small Wall Sconce	blank - standard 350mA	8 = 120-277V 1 = 120V	BZ = Textured Bronze finish DGY = Textured Dark Gray finish	PCB = button photocontrol
LPW16 = LytePro 16 LED Small Wall Sconce	5 = 530mA 7 = 700mA	8 = 120-277V 1 = 120V	BZ = Textured Bronze finish DGY = Textured Dark Gray finish	PCB = button photocontrol
LPW32 = LytePro 32 LED Medium Wall Sconce	7 = 700mA	8 = 120-277V 1 = 120V DT = Dual Tap, 120V or 277V	BZ = Textured Bronze finish DGY = Textured Dark Gray finish WH = Textured White finish	PCB = button photocontrol MR = motion response

## Performance Specifications



	LPW7	LPW16-5	LPW16-7	LPW32
<b>Distribution</b>	Type 2	Type 3	Type 3	Type 3
<b>Initial Lumens</b>	1,154	2,698	3,374	6,913
<b>Average System Watts</b>	14	28	36	71
<b>Efficacy</b>	82	96	93	98
<b>BUG Rating</b>	B1-U0-G1	B1-U0-G1		B1-U0-G1
<b>DLC Qualified</b>	✓	✓		✓
<b>Ambient Temp. Rating</b>	-30° to 40°C (-22° to 104°F)	-40° to 40°C (-40° to 104°F)		-40° to 40°C (-40° to 104°F)
<b>Apprx. Luminaire Weight</b>	4 lbs (1.8Kg)	6 lbs (2.7Kg)		11 lbs (5Kg)
<b>IP-Rating</b>	IP65	IP65		IP65

## Control Options




Button Photocontrol (PCB)




Motion Response (MR)

## Mounting Height Guide

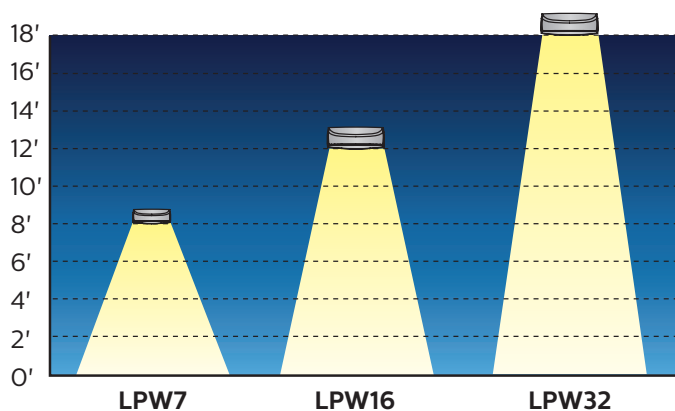

# Technical Information


## Dimensions<sup>1</sup>

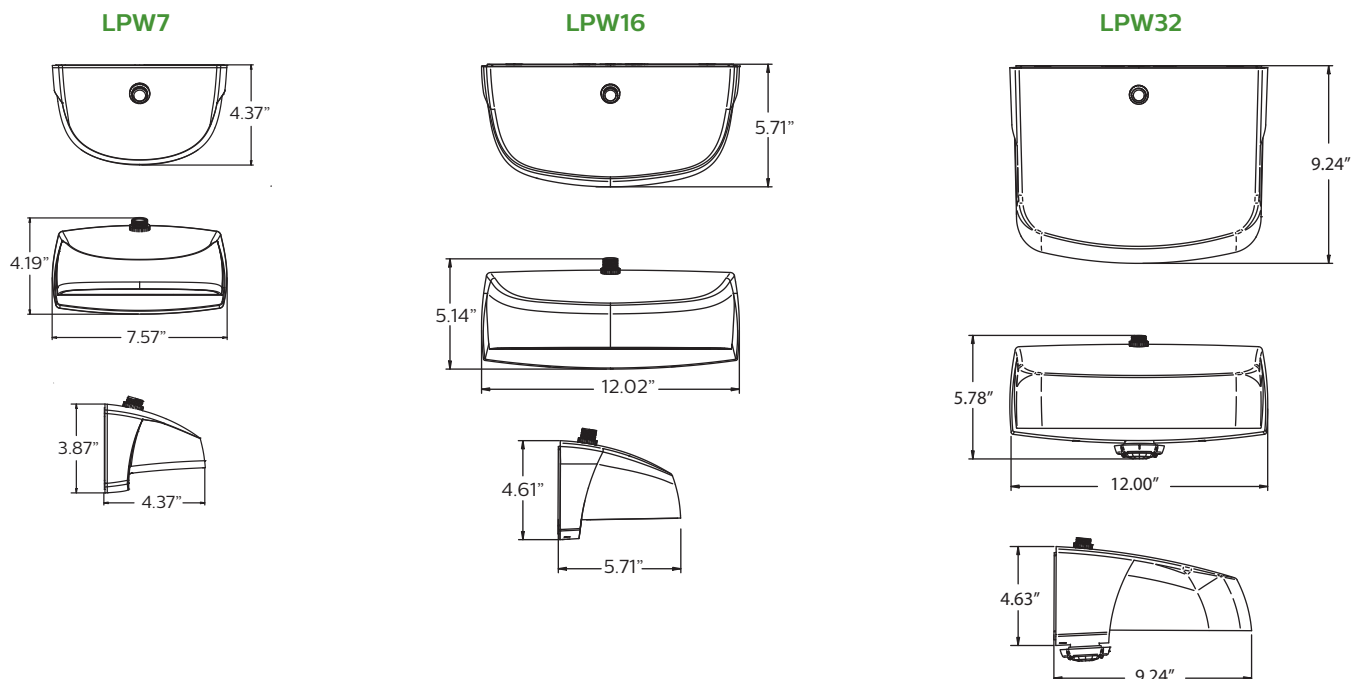

1. Motion Response and Button Photocell in line art show placement on select fixture types. See page 2 for Control Option details.

## Accessory Dimensions

Universal wall cover mounting plate (LPWCVRPLT-BZ) is constructed of 0.8" aluminum, and is field installed to cover larger, pre-existing openings or surfaces. Provides the same junction box pattern as the luminaire, or may be fastened to wall using four point mounting.

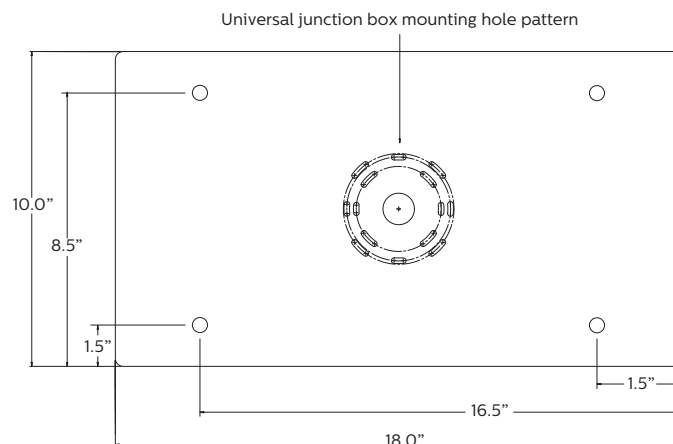

©2015 Koninklijke Philips N.V. All rights reserved.  
Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.



Philips Lighting, North America Corporation  
200 Franklin Square Drive, Somerset, NJ 08873  
Tel. 855-486-2216

Imported by: Philips Lighting,  
A division of Philips Electronics Ltd.  
281 Hillmount Rd, Markham, ON, Canada L6C 2S3  
Tel. 800-668-9008