



Ecolume Decolume

Site & area luminaire

PHILIPS



ENGINEERED FOR VALUE

Historically, the selection of an economy luminaire posed an unsatisfying series of compromises – aesthetics, scale, detailing, sealing, finish quality and, most importantly, lighting performance that never quite met expectations. Ecolume changed all that, quickly becoming the standard for value and quality in outdoor area lighting. With four housing sizes, lamps to 1000w, and the distinctive ribbed look of the Decolume, these luminaires emerge as the unequalled choice for appearance and performance illumination. Another attractive feature is the Ecolume Quick Ship Program, through which selected models are available to ship within three business days.



Ecolume/Decolume is a model of quality and value. Durable construction, high-performance optics and competitive price combine to create what may be the most versatile and cost-effective luminaire available.



A SMALLER, TALLER 750W LUMINAIRE

The Decolume DECT 18" square housing stands tall in the higher wattage market. High light level requirements using lower mounting heights were it's inspiration. This smaller, more understated luminaire minimizes the scale of the site lighting while maximizing the site illumination.

An additional 2" in the DECT housing depth provides capacity for up to 750 watt metal halide electrical systems. The attractive Decolume ribbed design further contributes to minimizing the luminaire profile. A wide variety of optic choices in this "neighbor-friendly" luminaire limits light trespass while maintaining safety-conscious light levels.

DECTA18



HOUSING

The Ecolume housing wrapper is one-piece, die-formed aluminum with an integral reinforcing spine and no welded corners. The Decolume is further enhanced with three rolled integral ribs that create twin edge bands. Silicone sealant provides a weather-tight barrier at all points of material transition.

LENS ASSEMBLY

An extruded aluminum, clear anodized door frame retains an optically clear, heat and impact resistant, tempered flat or tempered sag glass lens. EC18 vertical

lamp luminaires utilize high temperature resistant thermoplastic sag lenses. The DECT18 750w vertical lamp luminaire sag lens is tempered glass. The lens is sealed to the door frame and the door frame is gasketed to the housing with hollow section, high-compliance, memory-retentive extruded silicone rubber.

OPTICAL SYSTEM

The Ecolume/Decolume segmented reflector system consists of two levels of specular, clear anodized aluminum facets precisely aligned to achieve IES Types II, III, V and Type IV Forward Throw distributions.


An upright recovery box provides for even illumination directly below the luminaire. All mogul base horizontally positioned metal halide units feature a position-oriented lamp holder and lamp stabilizer. 3V or QV vertical lamp units can be field adjusted to achieve wider luminaire spacings while still meeting IES semi-cutoff criteria.




ECOLUME/DECOLUME DEFINES VALUE

ROTATABLE OPTICS

Ecolume/Decolume reflector assemblies are fully rotatable in 90° increments. This feature permits aiming of the distributions in any of four directions, regardless of the arm-to-pole orientation. Architectural symmetry is preserved as all of the luminaires and poles maintain a consistent alignment while the optical systems are aimed in various directions.



The primary benefit of rotatable optics, however, is installation ease. For twin units with parallel orientation, a special “parallel bracket assembly” is not required. Additionally, the contractor has remarkable flexibility at the jobsite to fine-tune the site plan without incurring special pole drilling costs.



POST TOP MOUNTING

The co-axial fitter-yoke assembly is fabricated from extruded rectangular aluminum tubing. The yoke-to-pole fitters are designed and manufactured specifically for a variety of pole sizes, ensuring transitions are clean and continuous. The yoke is internally attached to the sides of the housing with hex head mounting bolts.

ARM MOUNTING

A one-piece extruded aluminum arm conceals two steel tie rods and all mounting hardware. No fasteners or welds are visible. For pole installation, a reinforcing plate and wire strain relief are provided.

WALL MOUNTING


The luminaire is supported by a 10 gauge galvanized steel mounting plate. A die cast aluminum canopy is provided, which completely conceals the mounting assembly.



ELECTRICAL

All electrical components are UL-recognized, factory installed, and mounted on a unitized plate. The electrical system is fully tested prior to shipment. High power factor ballasts are rated for -20°F/-29°C starting temperatures. The lamp-holder is glazed porcelain with a nickel-plated screw shell.

Quick disconnects are supplied on the reflector assembly. The entire ballast assembly is secured within the luminaire, above the optical system.

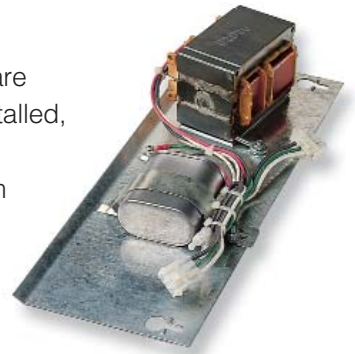

FINISH


Each luminaire receives a fade- and abrasion-resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) powdercoat finish. Optional finishes may vary.

LABELS

All luminaires bear UL or CUL (where applicable) Wet Location labels.

DECOLUME COLOR BANDS

Decolume may be specified with factory-applied color accents which nest within the reveals at the lower perimeter of the housing. Consult factory for availability of colors by size and luminaire type.

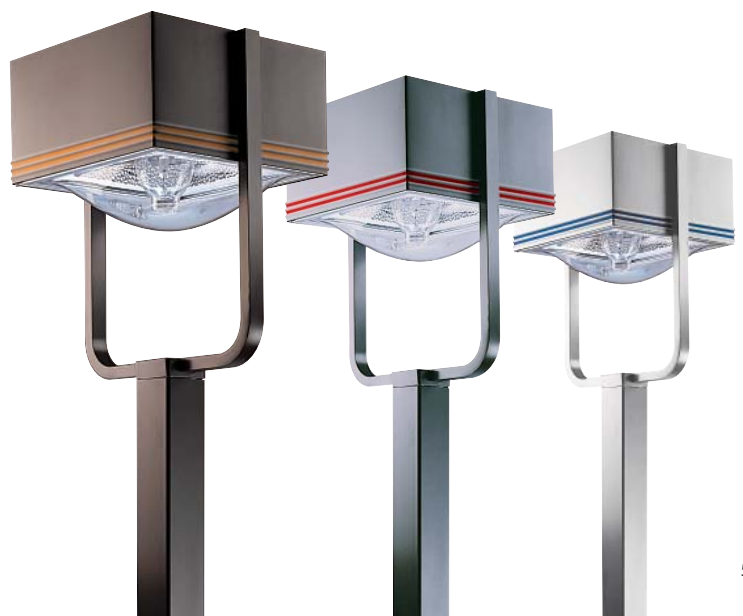

OPTICS AND PHOTOMETRICS

The quality of a cutoff luminaire is measured by how well it controls and distributes light. Ecolume/Decolume features a segmented optical system consisting of two levels of highly specular facets precisely aligned to distribute light in controlled patterns. This sophisticated optical system provides high efficiencies, uniform distribution and superior brightness control.



TYPE II (2H) & III (3H)

These reflector systems create an asymmetric distribution pattern with wide lateral throw. Type II and Type III distributions work well in walkway and roadway applications where more light is required “street side” than “house side.”



FORWARD THROW (FH)

The Type IV Forward Throw reflector is suitable for applications where light is primarily required in one direction with minimal backlight. Typical installations include perimeter lighting, auto dealerships and tennis courts.



TYPE V HORIZONTAL (QH)

The Type V square creates a symmetrical pattern for efficiently illuminating large areas. Good spacings are combined with excellent glare control with the horizontal lamp QH reflector.







VERTICAL LAMP(3V)(FV)(QV)

A vertical lamp position makes this the most efficient optical system available for uniform illumination of large parking areas without pattern overlap. The two-position socket offers remarkable design flexibility. The standard lamp socket position provides superior spacings while meeting IES criteria for cut-off of high angle brightness. A lower socket position creates a system for the widest spacings available while still meeting IES semi-cutoff criteria.

For more information about vertical lamp choices, please turn to pages 8-9.


OPTICS AND PHOTOMETRICS

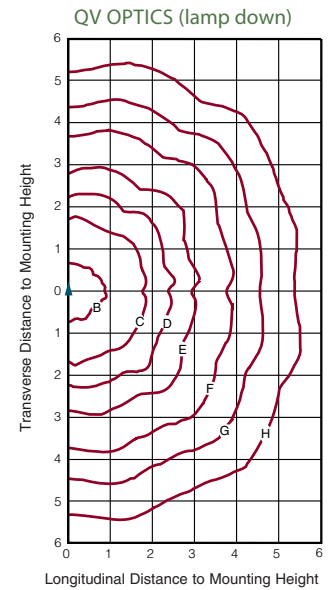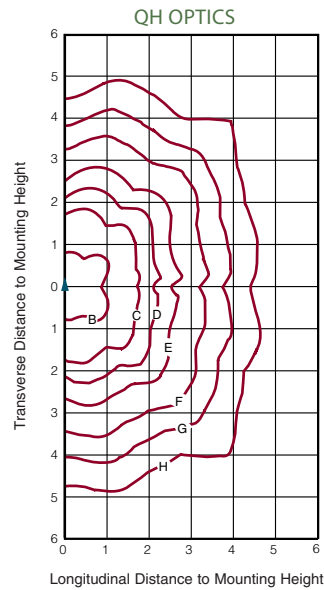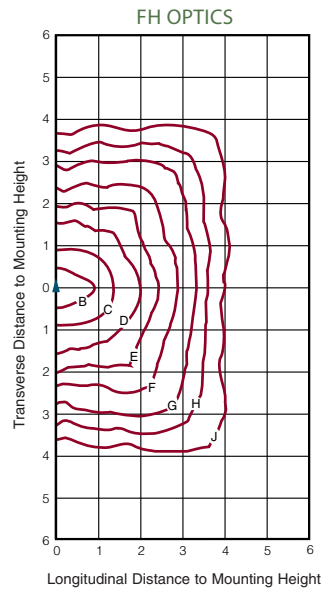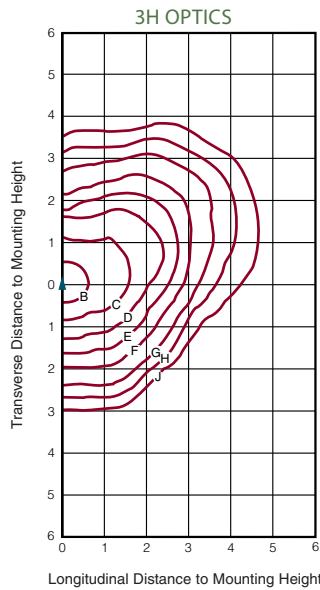

Initial footcandles for 400W HPS units mounted on 30' poles.		Pole Height (Feet)		Lamp Factor Table	
Curve	F.C. Value		Factor	Lamp	Factor
B	5.00	10	9.00	150HPS	0.32
C	2.50	12	6.25	250HPS	0.58
D	1.00	14	4.59	400HPS	1.00
E	0.50	16	3.52	175SMH	0.30
F	0.25	18	2.78	250SMH	0.46
G	0.10	20	2.25	400SMH	0.80
H	0.05	25	1.44		
J	0.025	35	0.73		
		39	0.59		

Footcandle Multipliers for Other Conditions

- For other mounting heights, multiply the values of footcandles shown by the pole height factor in table above.
- For multiple mounts with beam patterns oriented parallel, multiply F.C. by number of heads per pole.
- For combination of above, multiply factors together to produce a single multiplier.
Example: Two heads on 39' pole = $2 \times 0.59 = 1.18$ Total F.C. Multiplier.
- For approximate F.C. levels, the lamp factors shown at right may be multiplied by the 400w HPS value.
Example: 250w HPS Type III at curve C = $.58 \times 2.50 = 1.45$ F.C.
- 2H, 3V, FV optics not shown.

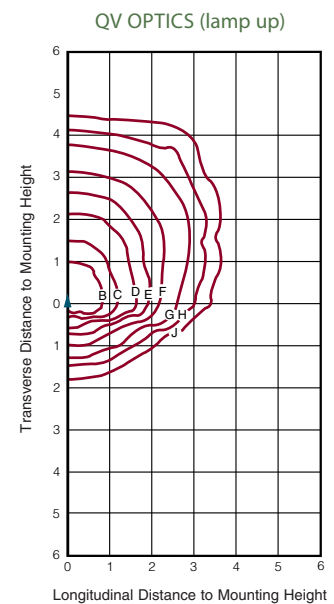

ADJUSTABLE VERTICAL LAMP OPTICS (18" & 23" HOUSING)


The 3V & QV vertical optical systems add another dimension to the performance and economy of the Ecolume/Decolume luminaire. A field-adjustable lampholder has been designed into the reflector assembly. In the upper position, the reflector system offers full cutoff while providing a highly efficient distribution. In those applications where glare control is not as critical as the desire for wider spacings, the lampholder can be placed in the lower position. This assures the widest pole spacings while still maintaining IES semi-cutoff classification.




Lampholder adjusted for up lamp position and maximum glare control.



Lampholder adjusted for down lamp position which enables wider spacings, but less control of glare.

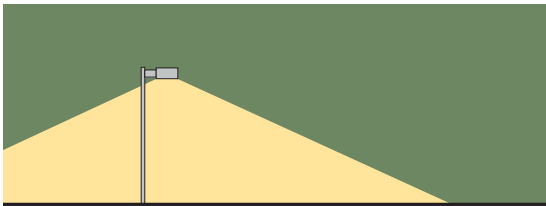

Raised lamp/socket position provides cutoff for superior control of glare and light trespass.

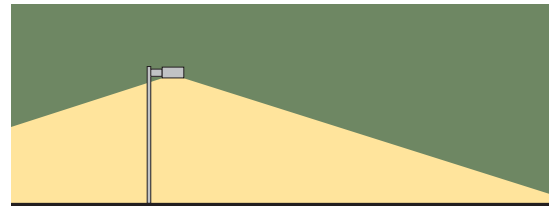

Lowered lamp/socket position enables wider spacings yet still meets IES semi-cutoff specifications.

Adjustability to semi-cutoff position not available with FV optics.



HIGH PERFORMANCE LARGE AREA OPTICS


Large areas, like retail mall space or long-term parking lots, provide both lighting challenges and cost saving opportunities. MallMaster™ optics were designed with these areas in mind. One footcandle minimum criteria projects are ideally suited to these optics, especially when spacing-to-mounting-height ratios are a top priority. MallMaster™ provides even illumination while allowing for economical, wide pole spacings.

Using retrofit mechanisms, Ecolume/Decolume 23" luminaires, equipped with MallMaster™ optics, can be mounted to existing poles, increasing light levels while decreasing job costs through utilization of existing foundations and poles.

MallMaster™ reflectors were designed for 1000 watt sources and are available in both IES Type III semi-cutoff (3SV) and Type V semi-cutoff (QSV) patterns.



A combination of highly specular and hammertone aluminum is used in precisely engineered faceted segments to form MallMaster™ high performance optics.

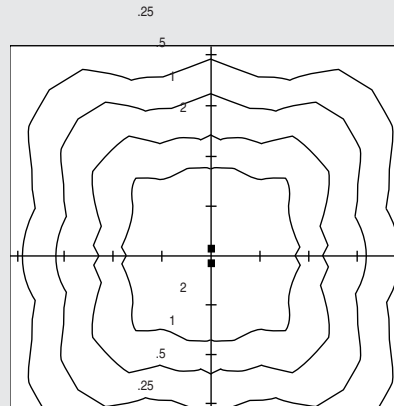

Exceptionally wide spacings, thorough coverage to the pattern corners, maximum cost savings... MallMaster™ optics are engineered for value.



ECOLUME QUICK SHIP



In response to increasingly tight delivery schedules, Philips Gardco has developed a 3-Day Quick Ship Program that makes it easy to order our most popular and versatile luminaires, poles and options. Lamps for all luminaires are in stock.

When specifying, please pay particular attention to the size of luminaire, wattage and optical system desired. Refer to www.sitelighting.com for the most current information.

QUICK SHIP AREA LIGHTING LUMINAIRES

EC14 – Ecolume, 14" square

- 150HPS or 175MH
- Multi-Tap Ballast (120/208/240/277) Tied to 277V
- Bronze Painted (BRP)
- Type 3H or FH (Forward Throw)
- Arm Mount, Wall Mount (no arm), Wall Mount with Arm

Ship From: York, Pennsylvania
Dallas, Texas
San Jose, California

PREFIX	MOUNTING	SIZE	CONFIGURATION	DISTRIBUTION	WATTAGE	VOLTAGE	FINISH
EC	A	14	1	3H	175MH	277	BRP
EC	A Arm Mount W Wall Mount WA Wall Mount w/Arm	14	1 2 3 4	3H, FH	150HPS, 175MH	120, 208, 240, 277	BRP = Bronze Paint

EC18 – Ecolume, 18" square

- 250HPS, 400HPS, 250MH or 400MH
- Multi-Tap Ballast (120/208/240/277) Tied to 277V
- Bronze Painted (BRP)
- Type 3H or FH (Forward Throw)
- Arm Mount, Wall Mount (no arm), Wall Mount with Arm

Ship From: York, Pennsylvania
Dallas, Texas
San Jose, California

PREFIX	MOUNTING	SIZE	CONFIGURATION	DISTRIBUTION	WATTAGE	VOLTAGE	FINISH
EC	A	18	1	3H	250MH	277	BRP
EC	A Arm Mount W Wall Mount WA Wall Mount w/Arm	18	1 2 3 4	3H, FH	250HPS, 400HPS, 250MH, 400MH,	120, 208, 240, 277	BRP = Bronze Paint

Add suffix to the end of the order number – Example: EC A 14 1 3H 175MH 277 BRP – PTF2

Options:

- AP Adjustable Knuckle - Pole Mount
- AT Adjustable Knuckle - Tenon Mount
- PTF2 Pole Top Fitter 2 3/8" diameter tenon for use with a 14" - 18" Luminaire (2 3/8" X 4")

QUICK SHIP POLES

MODEL: SSS (Straight Square Steel)
 SIZE: 4" / 5"
 GAUGE: 11 ga.
 HEIGHT: 4" - 15', 20', 25'; 5" - 30'

Ship From: York, Pennsylvania
 Dallas, Texas
 San Jose, California

DRILLING/

HARDWARE: D1/2 (Drilled for 2 way @180° with (1) side plugged. Use for Single or 2 way @180° Mounting).
 D3/4 (Drilled for 4 way @ 90° with (2) sides plugged. Use for 2, 3 or 4 way @ 90° Mounting).
 SSS Poles Drilled for 14" and 18" Ecolume.
 Includes hand hole cover, base cover and top cap.

ANCHORAGE: SSS – (4) 3/4" X 17" X 3"; TRS – (4) 1" X 36" X 4"

BASE COVER: Non-metallic, 2 piece

POLE	HEIGHT	SIZE	GAUGE	DRILLING	FINISH
SSS	15	4	11	D2	BRP
SSS	12', 20', 25', 30'	4 5	11	D1/2 Drilled for 2 way @180° with (1) side plugged. Use for Single or 2 way @180° Mounting. D3/4 Drilled for 4 way @ 90° with (2) sides plugged. Use for 2, 3 or 4 way @ 90° Mounting.	BRP = Bronze Paint

1. SSS 30' Poles ship by the second Friday following receipt of order.

QUICK SHIP ANCHOR BOLTS

Anchor Bolts are shipped in sets of (4) with
 double nuts, washers and template.

1/2" X 18" X 2"
 5/8" X 18" X 3"
 3/4" X 17" X 3"
 1" X 36" X 4"

Ship From: York, Pennsylvania
 Dallas, Texas
 San Jose, California



14" LUMINAIRE ORDERING

PREFIX	CONFIGURATION	DISTRIBUTION	WATTAGE	VOLTAGE	FINISH	OPTIONS
ECA14	1	3V	175PSMH	480V	BLP	F
<u>Ecolume</u>	1	<u>Horizontal Lamp</u>	70 HPS ³	120	BRP Bronze Paint	HS
ECA14	Single Assembly	2H Type II	100 HPS ³	208	BLP Black Paint	F
ECW14	2	3H Type III	150 HPS ³	240	WP White Paint	LF
ECWA14	Twin Assembly	FH Type IV	100 MH ⁶	277	NP Natural	PCT
<u>Decolume</u>	2@90	Forward Throw	150	347	Aluminum Paint	PCR
DECA14	Twin Assembly at 90°	QH Type V	MH ⁶	480	OC Optional Color Paint	PCB
DECW14	3	<u>Vertical Lamp</u>	175 MH ³	QUAD	Specify RAL designation. ex: OC-RAL7024.	AP
DECWA14	Triple at 90°	3V ^{1,2} Type III	200	120/208/240/277 factory tied to 277V.	SC Special Color Paint	AT
	3@120	Vertical Lamp	MH ⁴		Must supply color chip.	PTF2
	Triple at 120°	FV ^{1,2} Type IV	175			PTF3
	4	Forward Throw	PSMH ⁵			PTF4
	Quad Assembly	Vertical Lamp				ACR
	Use "1" for W/WA Wall Mounted Units.	QV ^{1,2} Type V				POLY
		Vertical Lamp				QS
						QST
						CR

Arm mounting on round poles is designed to mount to poles measuring 3.5" OD or larger.

1. Vertical lamp optics are supplied standard w/high temperature resistant thermoplastic sag lens.
2. 14" vertical lamp optics require a medium base lamp. N/A with 480V.
3. Requires mogul base lamps in horizontal optics and medium base lamps in vertical optics. N/A w/480V.
4. Requires mogul base lamps in horizontal optics and medium base lamps in vertical optics.
5. Vertical Lamp optics only. Medium base lamps only. M137 or M152.
6. Requires medium base lamp in all optics.

Prefix

ECA14	14" Square Arm Mount Luminaire
ECW14	14" Square Direct Wall Mount Luminaire
ECWA14	14" Square Wall Mount w/Arm
DECA14	14" Square Arm Mount Luminaire
DECW14	14" Square Direct Wall Mount Luminaire
DECWA14	14" Square Wall Mount w/Arm

Options


HS	Internal House Side Shield Supplied standard for FH/FV.
F	Fusing
LF	In-Pole/In-Line Fusing Kit includes In-Line Fuses.
PCT	Locking Type Photocontrol Receptacle w/Photocontrol Not available with 480V.
PCR	Locking Type Photocontrol Receptacle
PCB	Button Photocontrol
AP	Adjustable Knuckle - Pole Mount
	Only available with single and twin luminaires @ 180°.
AT	Adjustable Knuckle - Tenon Mount
PTF2	Pole Top Filter 2 3/8" X 4"
PTF3	Pole Top Filter 3" - 3 1/2" X 6"
PTF4	Pole Top Filter 3 1/2" - 4" X 6"
ACR	Acrylic Sag Lens In lieu of glass.
POLY	Polycarbonate Sag Lens In lieu of glass.
QS	Quartz Standby
QST	Quartz Standby - Timed Delay
CR	Colored Reveal Decolume Only
	Specify color. Contact factory for availability.

Prior to ordering, consult submittal data sheet on www.sitelighting.com for the most current information.

As part of the continuous improvement process, Philips Gardco reserves the right to change materials or modify the design of its product without modification.

DIMENSIONS

Dimensions	14"	18"
A	14"/35.6cm	18"/45.7cm
B	7"/17.7cm	10"/25.4cm
C Drop Lens	2"/5.1cm	4"/10.2cm
D Arm Length	6"/15.2cm	9"/22.9
E Overall with Yoke	-	25.5"/64.8cm
F Arm Height	5"/12.7cm	5"/12.7cm
EPA - Arm Mount		
Single, Flat Lens	1.1 ft ² /.10 m ²	1.9 ft ² /.18 m ²
Single, Sag Lens	1.2 ft ² /.11 m ²	2.1 ft ² /.20 m ²
Twin, Flat Lens	2.2 ft ² /.20 m ²	3.8 ft ² /.35 m ²
Twin, Sag Lens	2.3 ft ² /.21 m ²	4.2 ft ² /.39 m ²
Quad, Flat Lens	2.8 ft ² /.26 m ²	4.8 ft ² /.45 m ²
Quad, Sag Lens	3.6 ft ² /.33 m ²	5.6 ft ² /.52 m ²
EPA - Yoke Mounted		
Single, Flat Lens	-	2.2 ft ² /.20 m ²
Single, Sag Lens	-	2.4 ft ² /.22 m ²
Single Luminaire Weight		
Arm Mount Flat Glass	30lbs/13.6kgs	50lbs/22.7kgs
Post top Mount Flat Glass	-	55lbs/24.9kgs
Arm Mount Sag Glass	32lbs/14.5kgs	52lbs/23.6kgs

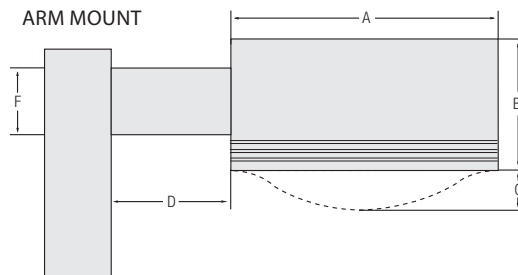

18" LUMINAIRE ORDERING

PREFIX	CONFIGURATION	DISTRIBUTION	WATTAGE	VOLTAGE	FINISH	OPTIONS
ECA18	1	3V	400MH	480V	BLP	F
<u>Ecolume</u>	1	<u>Horizontal Lamp</u>	250 HPS	120	BRP Bronze Paint	HS
ECA18	Single Assembly	2H Type II	400 HPS	208	BLP Black Paint	F
ECW18	2	3H Type III	250 MH	240	WP White Paint	LF
ECWA18	Twin Assembly	FH Type IV	400 MH	277	NP Natural	PCT
ECP118	2@90	Forward Throw	250 PSMH ³	347	Aluminum Paint	PCR
ECP218	Twin Assembly at 90°	QH Type V	320 PSMH ⁴	480	OC Optional Color	PCB
ECP318	3	<u>Vertical Lamp</u>	350 PSMH	QUAD	Paint	MF
ECP418	Triple at 90°	3V ^{1,2} Type III	400 PSMH ⁵	120/208/240/277 factory tied to 277V.	Specify RAL designa- tion.	AP
<u>Decolume</u>	3@120	Vertical Lamp			ex: OC-RAL7024.	AT
DECA18	Triple at 120°	FV ¹ Type IV			SC Special Color	PTF2
DECW18	4	Forward Throw			Paint	PTF3
DECWA18	Quad Assembly	Vertical Lamp			Must supply color	PTF4
DECP118	Use "1" for "P" Post Top, "W" and "WA" Wall Mounted Units.	QV ^{1,2} Type V				ACR
DECP218		Vertical Lamp				POLY
DECP318						QS
DECP418						QST
						CR

Arm mounting on round poles is designed to mount to poles measuring 3.5" OD or larger.


Prefix	
ECA18	18" Square Arm Mount Luminaire
ECW18	18" Square Direct Wall Mount Luminaire
ECWA18	18" Square Wall Mount w/Arm
ECP118	18" Square, Fits SSS5 Pole
ECP218	18" Square, Fits 2 3/8" OD Tenon
ECP318	18" Square, Fits 3" - 3.5" OD Tenon
ECP418	18" Square, Fits 4" OD Tenon
DECA18	18" Square Arm Mount Luminaire
DECW18	18" Square Direct Wall Mount Luminaire
DECWA18	18" Square Wall Mount w/Arm
DECP118	18" Square, Fits SSS5 Pole
DECP218	18" Square, Fits 2 3/8" OD Tenon
DECP318	18" Square, Fits 3" - 3.5" OD Tenon
DECP418	18" Square, Fits 4" OD Tenon

Prior to ordering, consult submittal data sheet on www.sitelighting.com for the most current information. As part of the continuous improvement process, Philips Gardco reserves the right to change materials or modify the design of its product without modification.

Options

HS	Internal House Side Shield Supplied standard for FH/FV.
F	Fusing
LF	In-Pole/In-Line Fusing Kit includes In-Line Fuses.
PCT	Locking Type Photocontrol Receptacle w/Photocontrol Not available with 480V.
PCR	Locking Type Photocontrol Receptacle
PCB	Button Photocontrol
MF	Mast Arm Fitter
AP	Adjustable Knuckle - Pole Mount Only available with single and twin luminaires @ 180°.
AT	Adjustable Knuckle - Tenon Mount
PTF2	Pole Top Filter 2 3/8" X 4"
PTF3	Pole Top Filter 3" - 3 1/2" X 6"
PTF4	Pole Top Filter 3 1/2" - 4" X 6"
ACR	Acrylic Sag Lens In lieu of glass.
POLY	Polycarbonate Sag Lens In lieu of glass.
QS	Quartz Standby
QST	Quartz Standby - Timed Delay
CR	Colored Reveal Decolume Only Specify color. Contact factory for availability.

DIMENSIONS

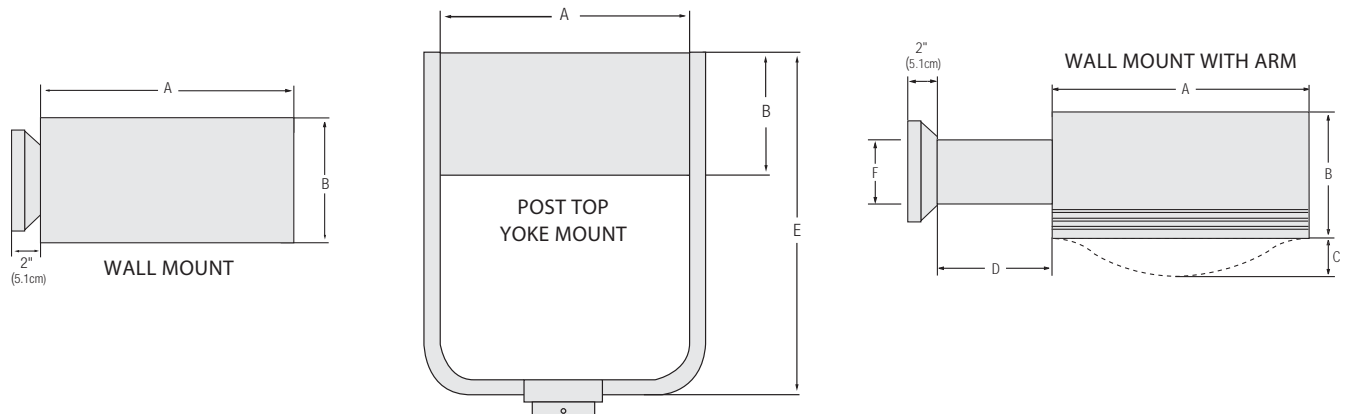

18" TALL LUMINAIRE ORDERING

PREFIX	CONFIGURATION	DISTRIBUTION	WATTAGE	VOLTAGE	FINISH	OPTIONS
DECTA18	1	3V	750PSMH	480V	BLP	F
DECTA18	1	<u>Horizontal Lamp</u>	450 PSMH ³	120	BRP Bronze Paint	HS
DECTW18	Single Assembly	2H Type II	750 PSMH ⁴	208	BLP Black Paint	F
DECTWA18	2	3H Type III	750 HPS	240	WP White Paint	LF
DECTP118	Twin Assembly	FH Type IV		277	NP Natural	PCT
DECTP218		Forward Throw		347	Aluminum Paint	PCR
DECTP318	2@90	QH Type V		480	OC Optional Color	PCB
DECTP418	Twin Assembly at 90°	<u>Vertical Lamp</u>		QUAD	Paint	MF
	3	3V ^{1,2} Type III		120/208/240/277	Specify RAL designation.	AP
	Triple at 90°	FV ¹ Type IV		factory tied to 277V.	ex: OC-RAL7024.	AT
	3@120	Forward Throw			SC Special Color	PTF2
	Triple at 120°	Vertical Lamp			Paint	PTF3
	4	QV ^{1,2} Type V			Must supply color	PTF4
	Quad Assembly	Vertical Lamp				QS
	Use "1" for "P" Post Top, "W" and "WA" Wall Mounted Units.					QST
						CR

Arm mounting on round poles is designed to mount to poles measuring 3.5" OD or larger.

1. 450w Vertical lamp optics are supplied standard w/high temperature resistant thermoplastic sag lens. 750w luminaires are supplied with and MUST use a sag glass lens.

2. 3V/QV optical systems feature an upper (factory set) cutoff socket position. For wider spacings, a lower (field adjustable) semi-cutoff socket position may be set.

Prefix

DECTA18	18" Tall Square Arm Mount
DECTW18	18" Tall Square Direct Wall Mount
DECTWA18	18" Tall Square Wall Mount w/Arm
DECTP118	18" Tall Square Post Top Mount, Fits SSS5 Pole
DECTP218	18" Tall Square Post Top Mount, Fits 2 3/8" Pole
DECTP318	18" Tall Square Post Top Mount, Fits 3" - 3 1/2" O.D. Pole
DECTP418	18" Tall Square Post Top Mount, Fits 4" O.D. Tenon

Prior to ordering, consult submittal data sheet on www.sitelighting.com for the most current information. As part of the continuous improvement process, Phillips Gardco reserves the right to change materials or modify the design of its product without modification.


Options

HS	Internal House Side Shield Supplied standard for FH/FV.
F	Fusing
LF	In-Pole/In-Line Fusing Kit includes In-Line Fuses.
PCT	Locking Type Photocontrol Receptacle w/Photocontrol Not available with 480V.
PCR	Locking Type Photocontrol Receptacle
PCB	Button Photocontrol
MF	Mast Arm Fitter
AP	Adjustable Knuckle - Pole Mount
	Only available with single and twin luminaires @ 180;
AT	Adjustable Knuckle - Tenon Mount
	Only available with single luminaires
PTF2	Pole Top Filter 2 3/8" X 4"
PTF3	Pole Top Filter 3" - 3 1/2" X 6"
PTF4	Pole Top Filter 3 1/2" - 4" X 6"
QS	Quartz Standby
QST	Quartz Standby - Timed Delay
CR	Colored Reveal
	Specify color. Contact factory for availability.

DIMENSIONS

Dimensions	18T	23"
A	18"/45.7cm	23"/58.4cm
B	12"/30.5cm	14"/35.6cm
C Drop Lens	4"/10.2cm	6.5"/16.5cm
D Arm Length	9"/22.9	12"/30.5cm
E Overall with Yoke	25.5"/64.8cm	37.5"/95.3cm
F Arm Height	5"/12.7cm	8"/12.2cm
EPA - Arm Mount		
Single, Flat Lens	2.2 ft ² /.20 m ²	3.6 ft ² /.33 m ²
Single, Sag Lens	2.3 ft ² /.21 m ²	3.9 ft ² /.36 m ²
Twin, Flat Lens	4.3 ft ² /.40 m ²	7.3 ft ² /.68 m ²
Twin, Sag Lens	4.7 ft ² /.44 m ²	7.8 ft ² /.72 m ²
Quad, Flat Lens	5.6 ft ² /.52 m ²	8.8 ft ² /.82 m ²
Quad, Sag Lens	6.1 ft ² /.57 m ²	9.5 ft ² /.88 m ²
EPA - Yoke Mounted		
Single, Flat Lens	2.5 ft ² /.23 m ²	3.6 ft ² /.33 m ²
Single, Sag Lens	2.6 ft ² /.24 m ²	3.9 ft ² /.36 m ²
Single Luminaire Weight		
Arm Mount Flat Glass	82lbs/37.1 kg	90lbs/40.8kg
Post top Mount Flat Glass	84lbs/38.1 kg	100lbs/45.4kg
Arm Mount Sag Glass	87lbs/39.5 kg	94lbs/42.6kg




ARM MOUNT

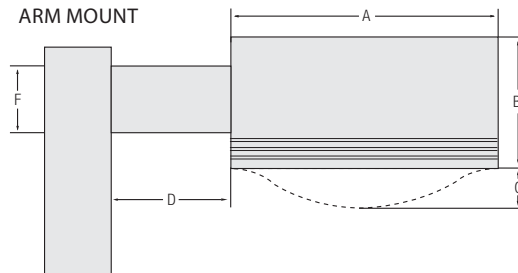

23" LUMINAIRE ORDERING

PREFIX	CONFIGURATION	DISTRIBUTION	WATTAGE	VOLTAGE	FINISH	OPTIONS
DECA23	1	3V	1000PSMH	480V	BLP	F
<u>Ecolume</u>	1	<u>Horizontal Lamp</u>	400 MH ³	120	BRP Bronze Paint	HS
ECA23	Single Assembly	2H Type II	1000 MH ⁴	208	BLP Black Paint	F
ECW23		3H Type III	750 HPS	240	WP White Paint	LF
ECWA23	2	FH Type IV Forward Throw	1000 HPS	277	NP Natural	PCT
ECP123	Twin Assembly	QH Type V	400 PSMH ³	347	Aluminum Paint	PCR
ECP223	2@90		750 PSMH ^{5,6}	480	OC Optional Color	PCB
ECP323	Twin Assembly at 90°	<u>Vertical Lamp</u>	1000 PSMH ⁶	QUAD	Paint	MF
ECP423	3	3V ^{1,2} Type III Vertical Lamp		120/208/240/277	Specify RAL designation.	AP
<u>Decolume</u>	Triple at 90°	FV ¹ Type IV Forward Throw Vertical Lamp		factory tied to 277V.	ex: OC-RAL7024.	PTF3
DECA23	3@120	QV ^{1,2} Type V Vertical Lamp				PTF4
DECW23	Triple at 120°					QS
DECWA23		3V-RNC ^{1,2} Type III Vertical Lamp, Reduced Nadir Candlepower			SC Special Color Paint	QST
DECP123	4	QV-RNC ^{1,2} Type V Vertical Lamp, Reduced Nadir Candlepower				CR
DECP223	Quad Assembly					
DECP323	Use "1" for "P" Post Top, "W" and "WA" Wall Mounted Units.	RNC (Reduced Nadir Candlepower) option should be specified only in applications requiring extreme maximum to minimum uniformity ratios (5 to 1 or lower). Reduced luminaire efficiency will result in lower average footcandle levels.				
DECP423		3SV ¹ Type III Vertical Lamp Mallmaster Semi-cutoff				
		QSV ¹ Type V Vertical Lamp Mallmaster Semi-cutoff				
		<u>Vertical Lamp – Flat Glass Lens</u>				
		3VFC Type III Vertical Lamp Full-cutoff				
		FVFC Type IV Vertical Lamp Full-cutoff				
		QVFC Type V Vertical Lamp Full-cutoff				
		Options				
		HS Internal House Side Shield Supplied standard for FH/FV.				
		F Fusing				
		LF In-Pole/In-Line Fusing Kit includes In-Line Fuses.				
		PCT Locking Type Photocontrol Receptacle w/Photocontrol Not available with 480V.				
		PCR Locking Type Photocontrol Receptacle				
		PCB Button Photocontrol				
		MF Mast Arm Fitter				
		AP Adjustable Knuckle - Pole Mount Only available with single and twin luminaires @ 180°.				
		PTF3 Pole Top Filter 3" - 3 1/2" X 6"				
		PTF4 Pole Top Filter 3 1/2" - 4" X 6"				
		QS Quartz Standby				
		QST Quartz Standby – Timed Delay				
		CR Colored Reveal (Decolume Only)				
		Specify color. Contact factory for availability.				
				1. 23" vertical lamp optics are supplied standard with sag glass lens.		
				2. 23" 3V/QV optical systems feature an upper (factory set) cutoff socket position. For wider spacings, a lower (field adjustable) semi-cutoff socket position may be set.		
				3. Available with 3VFC, FVFC and QVFC optics only.		
				4. 1000MH with 3VFC, FVFC and QVFC optics require BT-37 or E-37 Lamp. All other optics use a BT56 lamp.		
				5. M149 only.		
Arm mounting on round poles is designed to mount to poles measuring 3.5" OD or larger.						
Prefix						
ECA23	23" Square Arm Mount					
ECW23	23" Square Direct Wall Mount					
ECWA23	23" Square Wall Mount w/Arm					
ECP123	23" Square, Fits SSS5 Pole					
ECP223	23" Square, Fits 2 3/8" OD Tenon					
ECP323	23" Square, Fits 3" - 3.5" OD Tenon					
ECP423	23" Square, Fits 4" OD Tenon					
DECA23	23" Square Arm Mount					
DECW23	23" Square Direct Wall Mount					
DECWA23	23" Square Wall Mount w/Arm					
DECP123	23" Square, Fits SSS5 Pole					
DECP223	23" Square, Fits 2 3/8" OD Tenon					
DECP323	23" Square, Fits 3" - 3.5" OD Tenon					
DECP423	23" Square, Fits 4" OD Tenon					
Prior to ordering, consult submittal data sheet on www.site-lighting.com for the most current information. As part of the continuous improvement process, Philips Gardco reserves the right to change materials or modify the design of its product without modification.						

DIMENSIONS

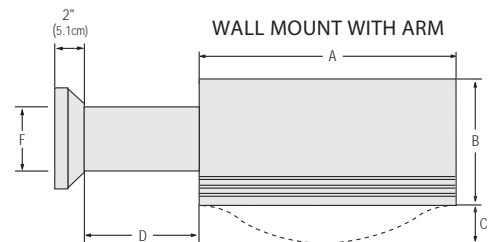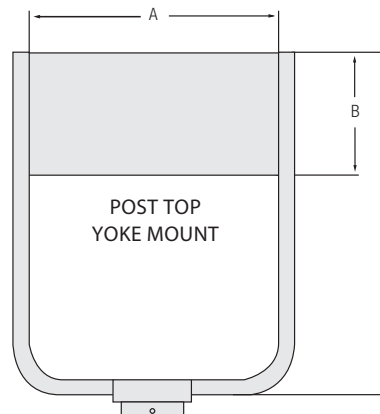



© 2013 Koninklijke Philips Electronics N.V. All rights reserved.
Specifications are subject to change without notice.
www.philips.com/luminaires

79203-7/0513

Philips Lighting Company
200 Franklin Square Drive
Somerset, NJ 08873
Phone: 855-486-2216

Philips Lighting Company
281 Hillmount Road
Markham ON, Canada L6C 2S3
Phone: 800-668-9008