READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE INSTALLING FIXTURE. FOR USE WITH LYTESPAN® TRACK SYSTEMS ONLY

This fixture is intended for installation in accordance with the National Electric Code and local regulations. To assure full compliance with local codes and regulations, check with your local inspector before installation. To prevent electrical shock, turn off electricity at fuse box before proceeding. Retain these instructions for maintenance reference.


INSTRUCTION SHEET NO.


0395 Page 1 of 2

INSTRUCTIONS FOR ATTACHING MINIFORMS® SPOTS TO LYTESPAN® TRACK

INSTRUCTIONS FOR ATTACHING MINIFORMS SPOTS TO SINGLE CIRCUIT TRACK SYSTEM

- 1. Insert into LYTESPAN TRACK (see Fig.1).LOCKING LEVER must be in same side of track as BEAD.
- 2. Rotate FITTING 90° clockwise (see Fig.2).
- 3. Rotate FITTING until LOCKING LEVER snaps and locks in place (see Fig. 3.)
- 4. To remove: depress LOCKING LEVER, then rotate FITTING 90° counterclockwise.

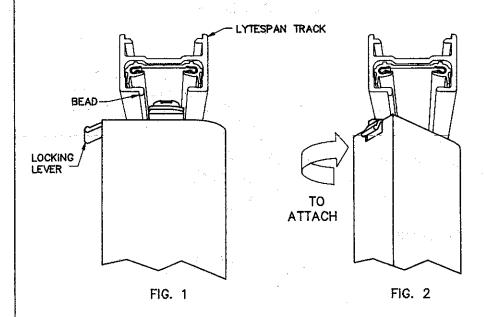

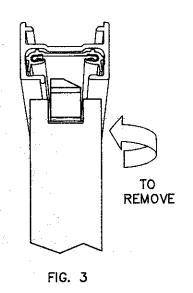

INSTRUCTIONS FOR CONVERTING LOW VOLTAGE MINIFORMS® ATTACHMENT FITTING TO OPERATE ON 2 CIRCUIT TRACK

(See Fig.4) BRASS CONTACT can be raised or lowered. Broken line indicates position for 1 circuit or lower circuit of 2 circuit track system.

To convert attachment FITTING for upper circuit of 2 circuit track, raise BRASS CONTACT to high position by lifting CONTACT as high as stop permits and CONTACT clicks into place.




FIG. 4

SEE BACK FOR LAMPING

LICHTOLIER® FALL RIVER, MASSACHUSETTS, 02720 MONTREAL, QUEBEC, CANADA

INSTRUCTION SHEET NO.

IS:9175

0395 Page 2 of 2

INSTRUCTIONS FOR LAMPING AND ADJUSTING MINIFORMS® SPOTS

- 1. Check to see that power is off when lamping or relamping.
- 2. Insert the two LAMP PINS into the SOCKET HOLES (see Fig. 5).
- 3. insert lamp into RING until both LAMP SPRINGS engage fully with the LAMP RIM (see Fig. 6).
- 4. To aim fixture, rotate as shown (Fig. 7).

NOTE: When using open lamps, make sure that the GLASS SHIELD is already in place before lamping or relamping.

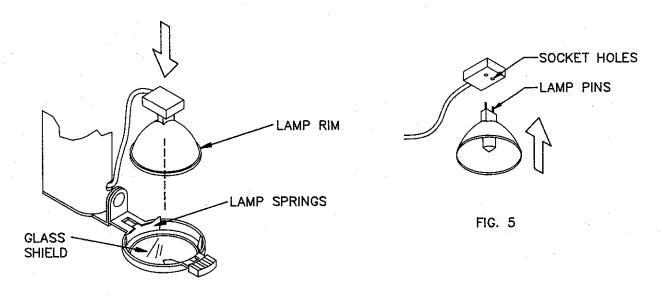


FIG. 6

