

PHILIPS
Day-Brite
CFI

Industrial

Vaporlume LED V2



Bringing reliable, rugged efficiency **to your industry**

Philips Day-Brite / Philips CFI Vaporlume LED sealed industrial V2 is a specialized wet location, IP rated product designed for use in both indoor and outdoor environments. It is a wet location listed, non-corrosive luminaire available in both fluorescent and LED light sources.

Features

- Industry leading efficacy up to 121lm/W.
- 8' tandem units available to reduce installation costs and enhance TCO.
- Wide optic (WHP) is ideal for parking garages and applicable to significant utility rebates.
- Acrylic diffused lens (L) available to further reduce LED pixilated glare and enhance visual comfort. Results in 3-5% decrease in luminous output.
- 7000lm high lumen package equivalent to 2x54W T5HO at room temperature.
- Vaporlume LED is an ideal choice over fluorescent providing instant on full brightness even in cold temperature applications.

Benefits

- Non-Corrosive Housing
- IP rated
- NSF listed
- DesignLights Consortium listed

Applications

- Food Handling Facilities
- Cold Storage
- Industrial
- Parking Garages
- Canopy
- Mass Transit Terminals



V2 Vaporlume LED

Ordering guide


Example: V2WAE51L840-4-UNV-MD360W

Family	Listing	Lens	Hubs Installed	Source	Color	Length ¹	Voltage	Dimming	Options
V2	W						—	—	
V2 Fiberglass Specification Industrial	W Wet Location	A DR Acrylic P Polycarbonate L Enhanced LED Acrylic (Available on 4ft and 8ft lengths only)	E Ends only T Top only B Both ends and top	27L 2700 nominal lumens 35L 3500 nominal lumens 43L 4300 nominal lumens 51L 5100 nominal lumens (25°C ambient) ² 51LH 5100 nominal lumens (-35°C to 40°C) ² 70L 7000 nominal lumens ²	830 80 CRI, 3000K 835 80 CRI, 3500K 840 80 CRI, 4000K 850 80 CRI, 5000K	2 2 feet 4 4 feet 8 8 feet	UNV Universal Voltage, 120-277 volt 347 347 volt ³ 480 480 volt ³	blank 0-10v SDIM 100/40 step dim ⁴	MD360W Wet location occupancy sensor, external WHP Wide Beam Optic EMLED Integral Emergency ⁵ IP67 Protection against effect of immersion


- The 2ft length is available with 27L only. The 4ft length is available with 35L, 43L, 51L, 51LH, and 70L. The 8ft length is available with 51L, 51LH, and 70L.
- Nominal lumen option codes are for 4ft fixture. Double for 8ft tandem.

- All 347V and 480V models available only for (-20°C to 25°C) ambient. Not available for use with 51LH or SDIM options or 2ft models.
- Step dim (SDIM) not available with 51LH or 2ft options.
- Integral Emergency (EMLED) not available with 347V, 480V or 2ft options.


Dimensions – 2ft

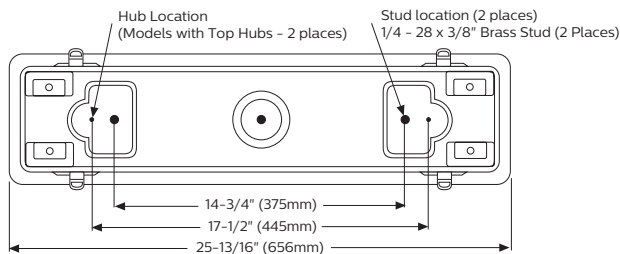


Dimensions – 2ft (side profile)

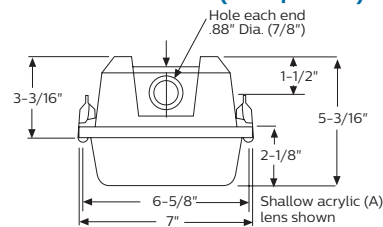


Dimensions – 4ft

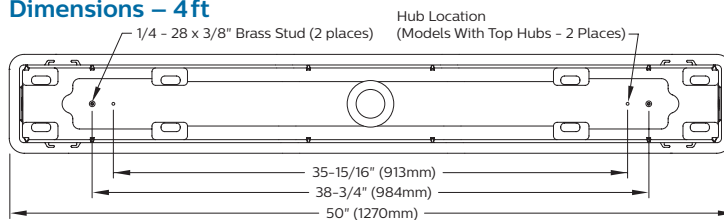

Dimensions – 4ft & 8ft (side profile)

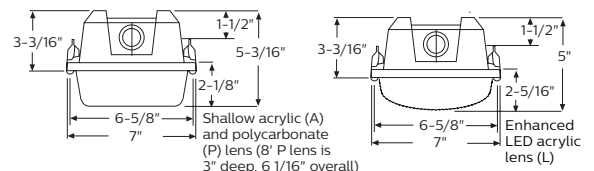

Dimensions – 8ft

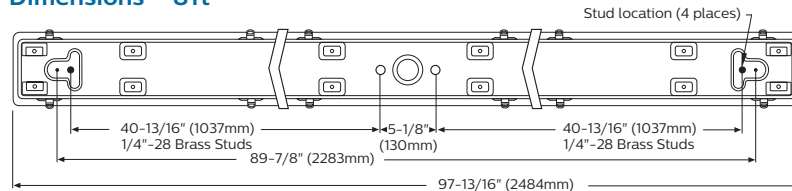

Accessories (order separately)

- TBK** Stainless Steel Top Bracket Kit (pair of brackets plus hardware)
- EBK** Stainless Steel End Bracket Kit (pair of brackets plus hardware)
- WBK** Stainless Steel Wraparound Bracket Kit (pair of brackets)
- FKR-126** Chain Hanger Set (requires TBK)

© 2016 Philips Lighting Holding B.V. All rights reserved. Philips reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.



Philips Lighting North America Corporation
200 Franklin Square Drive, Somerset, NJ 08873
Tel. 855-486-2216

Philips Lighting Canada Ltd.
281 Hillmount Rd, Markham, ON, Canada L6C 2S3
Tel. 800-668-9008