




5" Aperture Basic Wall Washer Reflector Trim


Lytecaster®
Recessed
Downlighting

1085
C0101


TYPE:

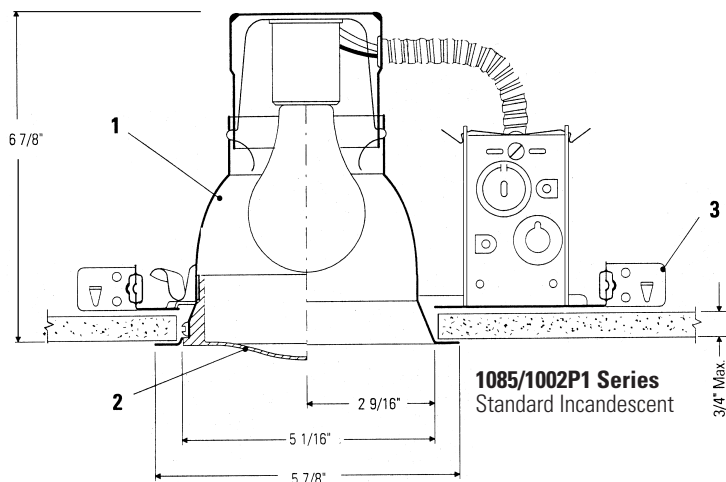


1085/1002P1 Series
Standard Incandescent

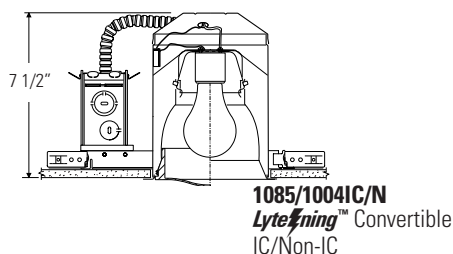

1085/1004IC/N
Lytefning™ Convertible
IC/Non-IC

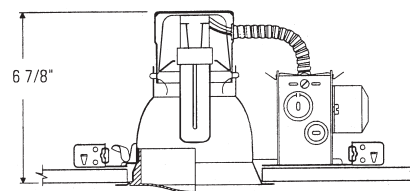

1085/1002F Series
1085/1910XFH1
Fluorescent/Non-IC

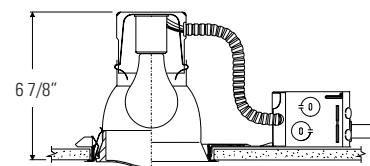

1085/1003R
Lytefning™ Non-IC
Remodeler Ring

Complete Fixture consists of FRAME-IN KIT & REFLECTOR TRIM. Select each separately.

Reflector Trim	Frame-In Kit – See Individual Frame-In Kit Specification Sheets							
	Incandescent				Fluorescent			
	Frame-In Kit	Installation Type	Lamping	Height	Frame-In Kit	Installation Type	Lamping	Height
❑ 1085 Perma White	❑ 1002P1	Non-IC		7 1/8"	❑ 1002F1	Non-IC	1 Lamp Quad Tube	6 7/8"
	❑ 1003R	Non-IC Remodeler	60W A19	7 1/8"	❑ 1002FH1	Non-IC	13W (GX23-2)	6 7/8"
					❑ 1002FH2	Non-IC		6 7/8"
	❑ 1000IC	IC		7 5/16"	❑ 1002FH1R	Non-IC Remodeler		6 7/8"
	❑ 1000AICM	IC	40W A19	7 5/16"	❑ 1910XFH1	Conversion		6 7/8"
	❑ 1004ICX/N	IC		7 1/4"				
	❑ 1004IC/N	Non-IC		7 1/2"				
	❑ 1004ICR	Non-IC Remodeler	40W A19	7 1/2"				
	❑ 1004SIC/N	Non-IC		7 1/4"				
	❑ 1004SICR	Non-IC		7 1/4"				

Features

- 1. Reflector:** Hydroformed aluminum, .040" thick (18 ga.) yellowing resistant, scuff resistant Perma White finish, 88% reflectance; provides smooth wash of light over wall surface without scallops or shadows; white trim flange.
- 2. Aperture Plate:** Molded high heat polymer white finish.
- 3. Frame-In Kit:** (1002P1 standard frame shown). Other frames listed above and shown on the right. See Frame-In Kit specification sheets for more details.

Options & Accessories

- Extra Wide Flange Trim Ring:** 1957 - 7" O.D.
Extra Thick Ceiling Mounting Rings: 1967B - up to 2" thick ceiling

Labels


UL (Suitable for Damp Locations); I.B.E.W.;
U.S. Patent Numbers: 4,313,154; 4,327,403; 4,751,624; 5,045,985
Other U.S. & Foreign Patents Pending

WE RESERVE THE RIGHT TO CHANGE DETAILS OF DESIGN, MATERIALS,
AND FINISH.

LIGHTOLIER a GENLYTE THOMAS company.
631 Airport Road, MA 02720
(508) 679-8131 • Fax (508) 674-4710

Copyright 2001

LIGHTOLIER®

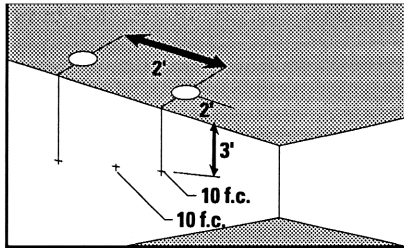**LIGHTING DATA**

EXAMPLE: Multiple 60W A19 units, located 2' from wall and 2' on center, provided illumination on the wall 3' down from the ceiling of 10 f.c. beneath and 10 f.c. between the fixtures.

FOOTCANDLES ON WALL FROM MULTIPLE UNITS

60W A19									
UNITS 2 FEET FROM WALL									
DISTANCE FROM CEILING, Ft.	2' — 2' —			3' — 3' —					
	1	9	8	9	6	5	6		
	2	11	11	11	8	7	8		
	3	10	10	10	7	7	7		
	4	8	8	8	6	6	6		
	5	6	5	6	4	4	4		
	6	4	4	4	3	3	3		
	7	3	3	3	2	2	2		
	8	2	2	2	2	2	2		
	9	2	1	2	1	1	1		

13W Quad Tube									
UNITS 2 FEET FROM WALL									
DISTANCE FROM CEILING, Ft.	2' — 2' —			3' — 3' —					
	1	6	5	6	5	3	5		
	2	10	10	10	7	6	7		
	3	8	8	8	6	5	6		
	4	6	6	6	4	4	4		
	5	4	4	4	3	3	3		
	6	3	2	3	2	2	2		
	7	2	2	2	1	1	1		
	8	1	1	1	1	1	1		
	9	1	1	1	1	1	1		

Footcandle values are averaged and rounded off and are based on a minimum of five units.

For fixture-to-wall distance, other than those shown, use maximum of 1 of 1 spacing (distance between fixtures not more than distance to wall) for best results.

To convert lighting data for a lower wattage incandescent lamp of the **same type**, multiply the footcandle values by the ratio of the lumens of the two lamps.