



DMNG232

RS-232 Network Gateway

Cost-effective serial port integration


The Philips Dynalite DMG232 network gateway provides cost-effective serial port integration between a DyNet network and third-party systems.

DMNG232

Cost-effective serial port integration

- **Seamless integration with third-party systems** – Including AV systems, lighting desks, data projectors, HVAC, BMS and security systems.
- **Internal controls** – Programmable logic controller capable of comprehensive conditional and sequential logic and arithmetic function processing.
- **Predefined data format library or create your own** – A library of data formats is available for systems integrators, or can be created using the onboard conditional logic engine to assemble and transmit user-defined data strings.
- **Macro functions available** – To simplify the control of multiple devices.
- **Powered from the DyNet network** – Requires no mains voltage supply.

Dimensions

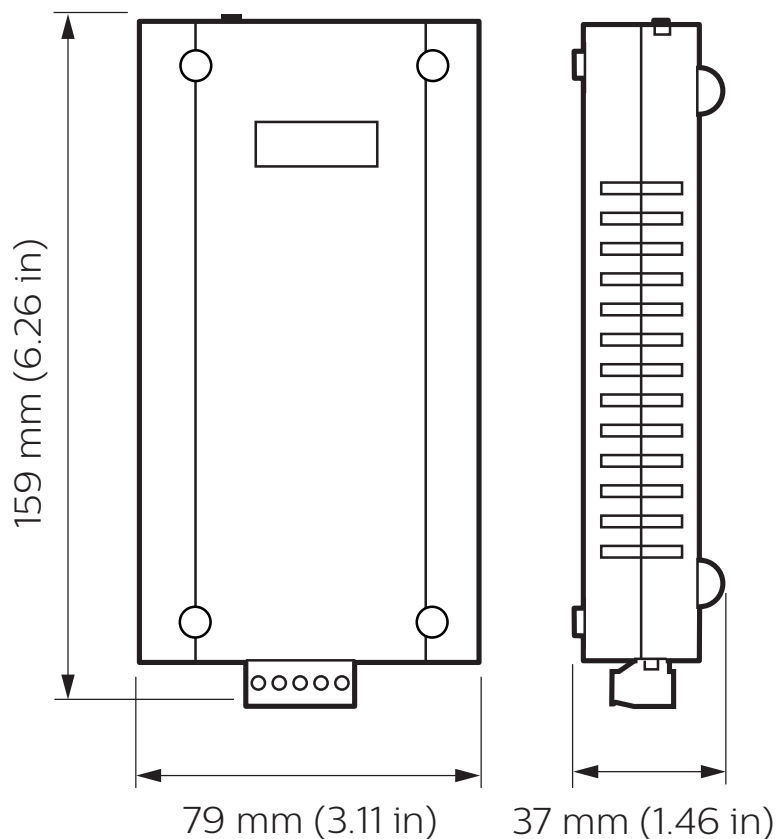

Specifications

Due to continuous improvements and innovations, specifications may change without notice.



DMNG232
RS-232 Network Gateway

Electrical

Supply Type	DyNet
Supply Voltage	12 VDC
Supply Current	50 mA
IEC Overvoltage Category	III

Control

Communication Ports	1 x RS-485 1 x RS-232
Supported Protocols	DyNet
RS-232 Port Modes	DTE, DCE (jumper-selectable)
User Controls	1 x service switch
Indicators	1 x service LED
Diagnostic Functions	Device online/offline status

RS-232 Data Formats

Baud Rate	600 – 250,000
Maximum Packet Length	254 bytes
Data Bits	7/8
Stop Bits	1/2
Parity	Odd/even/none
Flow Control	None/RTS-CTS

Physical

Dimensions (H x W x D)	37 x 79 x 149 mm (1.46 x 3.11 x 5.87 in)
Packed Weight	0.15 kg (0.33 lb)
Construction	ABS plastic
Communication Ports	1 x DB-9 (female) 1 x RJ12 1 x 5-way pluggable screw terminal
Communication Terminal Conductor Size	2.5 mm ² (#12 AWG) (max)

Environment


Operating Temperature	-0° to 50°C ambient (32° to 122°F)
Storage/Transport Temperature	-25° to 70°C ambient (-13° to 158°F)
Humidity	0 to 90% non-condensing
IEC Pollution Degree	III

Compliance

Certification	CE, RCM, RoHS
---------------	---------------



Electrical

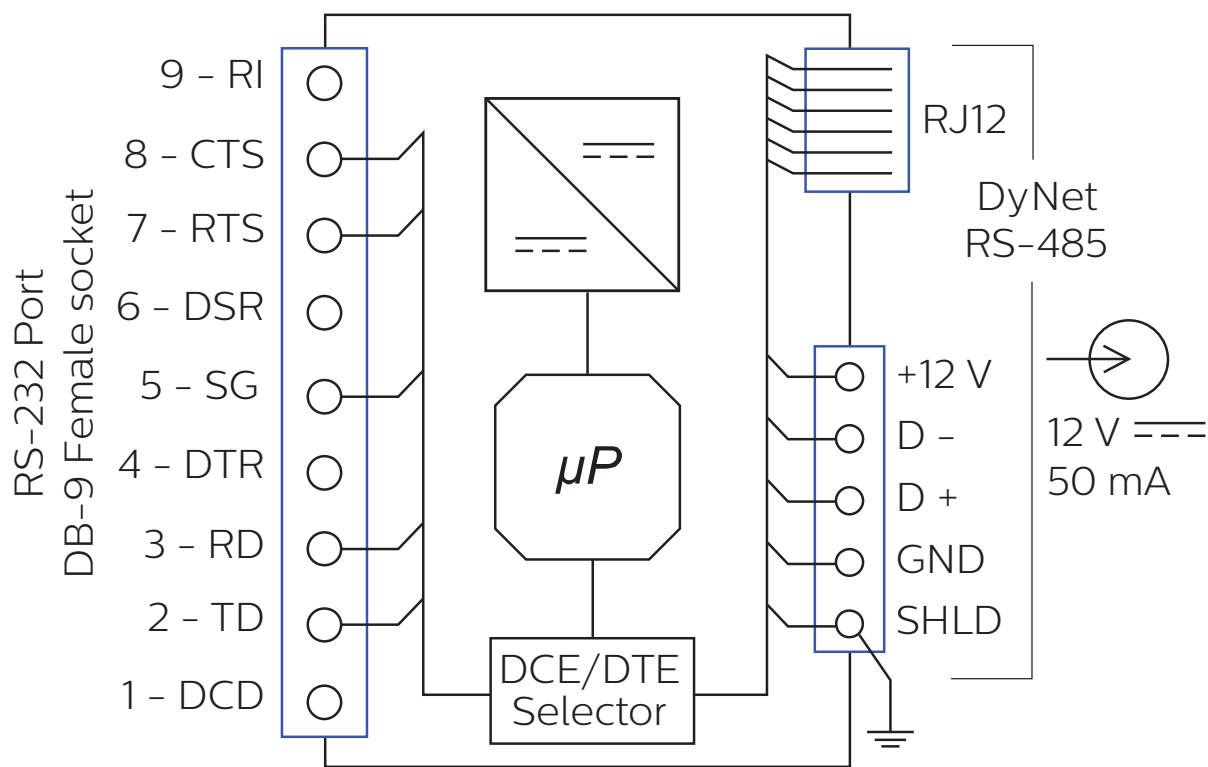

Ordering Code

Product

DMNG232

Philips 12NC

913703080309



© 2018 Signify Holding. All rights reserved. Specifications are subject to change without notice. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.