



Date: \_\_\_\_\_ Type: \_\_\_\_\_

Firm Name: \_\_\_\_\_

Project: \_\_\_\_\_

## PDS-60 24V DMX / Ethernet

Power / data supply for indoor and outdoor applications



For device mounting and maintenance details, refer to the Installation Instructions included in the product packaging, or download documentation from [www.colorkinetics.com/lis/pds/pds60/](http://www.colorkinetics.com/lis/pds/pds60/)

PDS-60 24 V is a versatile power / data supply designed for indoor and outdoor LED lighting installations using fixtures from Philips Color Kinetics.

PDS-60 24 V is compatible with both Ethernet and DMX controllers.

PDS-60 24 V delivers 62 watts of power output and accommodates input voltages ranging from 100 VAC to 240 VAC. Short-circuit protection prevents device failure due to incorrectly wired fixtures.



Featuring a NEMA 4 (IP66) enclosure, PDS-60 24 V installs in dry, damp, and wet locations.

PDS-60 24 V offers multiple standard-size conduit entries to accommodate 1/2 in (13 mm) and 3/4 in (19 mm) trade-sized conduit.

### Compatible Fixtures


Fixture	Max. Quantity Per PDS-60 24 V
ColorBlast® 6	2
ColorBlast 12	1
ColorBurst® 6	2
C-Splash™ 2	2

### DMX Configuration

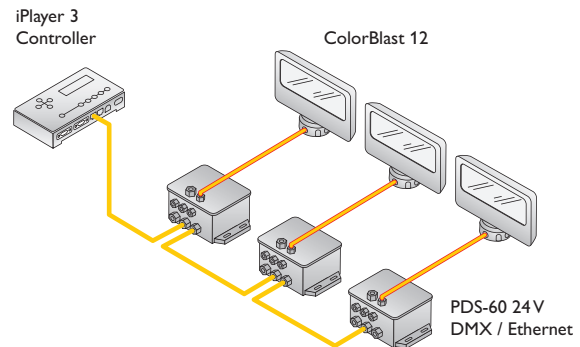

PDS-60 24 V wiring diagrams are available online at [www.colorkinetics.com/support/wiring/](http://www.colorkinetics.com/support/wiring/)

### Ethernet Configuration

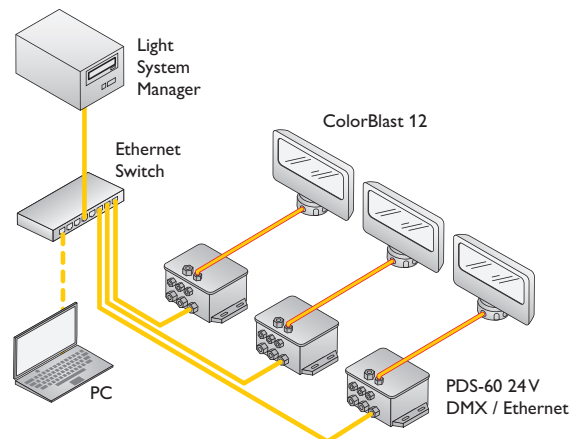

**PHILIPS**

## Specifications

Due to continuous improvements and innovations, specifications may change without notice.

Item	Specification	Details		
Electrical	Input Voltage	100 – 240 VAC, auto-switching, 50 – 60 Hz		
	Maximum Input Current	1.7 A at 100 VAC, 1.5 A at 120 VAC, .75 A at 240 VAC		
	Power Output	24 VDC, 62 W maximum		
	Fuse Rating	(2) 4 A, 5 x 20 fast blow fuses		
Physical	Dimensions (Height x Width x Depth)	3.6 x 5.5 x 8.8 in (91 x 140 x 224 mm)		
	Weight	4.5 lb (2.0 kg)		
	Construction	Cast aluminum enclosure with slots for surface mounting		
	Finish	Gray matte		
	Connectors	Data	RJ-45 input and output connectors	
		Power / Data Output	3-pin terminal block	
		Power Input	Line-neutral-ground cable, flying leads	
		Accessory Power	2-pin spring terminal	
	Temperature Ranges	14° – 104° F (-10° – 40° C) Operating 14° – 122° F (-10° – 50° C) Startup -40° – 176° F (-40° – 80° C) Storage		
	Humidity	0 – 95%, non-condensing		
	Cooling	Convection		
	Heat Dissipation	25% of total power input at maximum load		
	Data Input Source	Philips full range of controllers, third-party DMX controllers, or KiNET-compatible* third-party Ethernet controllers		
	Certification and Safety	Certification	UL / cUL, CE, PSE	
		Classification	UL Class 2 power supply	
Environment		Dry / Damp / Wet Location, IP66		

\* KiNET™ is the Ethernet lighting protocol from Philips Color Kinetics.




## Ordering Information

Item	Included Components	Item Number	Philips 12NC
PDS-60 24 V DMX / Ethernet	Power / data supply, (3) EMI suppression cores, (2) spare fuses, (8) NPT threaded seal plugs, and Installation Instructions	109-000017-03	910503700097



Use Item Number when ordering in North America.

PDS-60 24 V listens for data on both the DMX and Ethernet input ports. When valid data is detected, PDS-60 24 V automatically switches to the appropriate mode:


- In DMX mode, the red status light located inside the device housing is lit continuously.
- In Ethernet mode, the red status light blinks approximately once per second.
- The green status displays solid when a valid Ethernet link is detected.
- The yellow status light flickers as Ethernet data is received.




Philips Color Kinetics  
3 Burlington Woods Drive  
Burlington, Massachusetts 01803 USA  
Tel 888.385.5742  
Tel 617.423.9999  
Fax 617.423.9998  
[www.philipscolorkinetics.com](http://www.philipscolorkinetics.com)

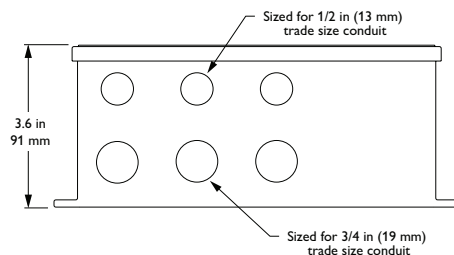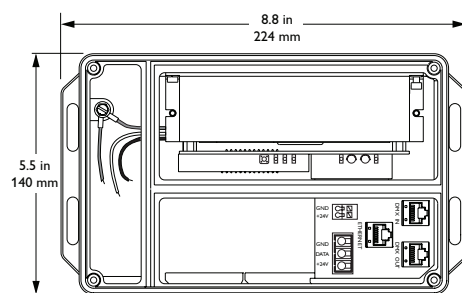

Overall Dimensions

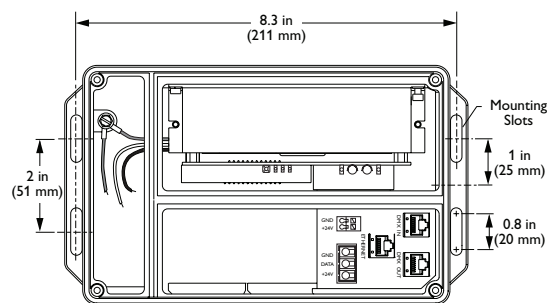

Mounting Dimensions

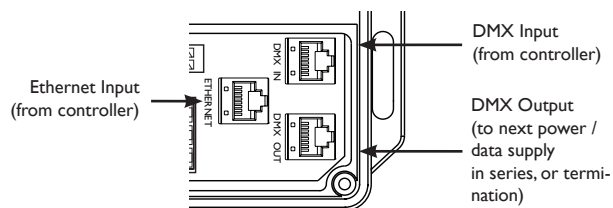

For complete instructions on configuring the PDS-60 24 V for use in an Ethernet or DMX environment, or using pre-configured controls, refer to the *Addressing and Configuration Guide* available online at [www.colorkinetics.com/support/addressing/](http://www.colorkinetics.com/support/addressing/)

Copyright © 2009 – 2010 Philips Solid-State Lighting Solutions, Inc. All rights reserved. Chromacore, Chromasic, CK, the CK logo, Color Kinetics, the Color Kinetics logo, ColorBlast, ColorBlaze, ColorBurst, eW Fuse, ColorGraze, ColorPlay, ColorReach, iW Reach, eW Reach, DIMand, EssentialWhite, eW, iColor, iColor Cove, IntelliWhite, iW, iPlayer, Optibin, and Powercore are either registered trademarks or trademarks of Philips Solid-State Lighting Solutions, Inc. in the United States and / or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. Due to continuous improvements and innovations, specifications may change without notice.

DAS-000059-01 R01 12-10