


Linear

TruGroove Wall

5200 lm/4ft, Indirect/Direct Asym
3000/3500/4000K

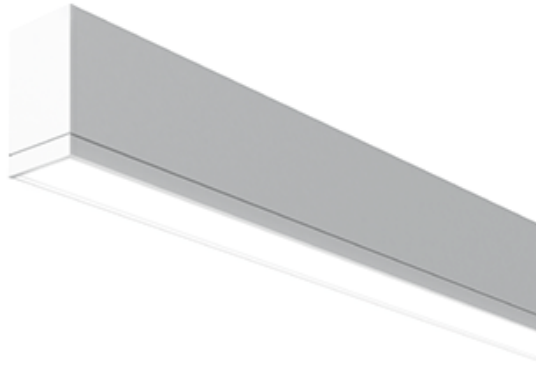

Project: _____

Spec Type: _____

Catalog No: 2925LxBWW _____

Qty _____

Line Notes: _____

TruGroove Recessed is driving performance beyond the edge. Innovative optics deliver exceptional uniformity and wide row spacing from a 3" aperture continuous line-of light. An extended family and refined design are perfect for lighting any professional space.

Ordering guide

Product Type	Source	Color Temp *	Lumens *	Lower Optics	Upper Optics	Run Length	Wiring †	Voltage	Driver	Finish
2925	L		B	W	W					
TruGroove Wall Indirect/Direct	L LED	A 4000K B 3500K C 3000K	B 5200 lm/4ft (55/45) C 4600 lm/4ft (70/30) D 3500 lm/4ft (55/45)	W Asymmetric MesoOptics	W Asymmetric Performance	04 4' 06 6' 08 8' Total run length (2' increments)	7 1 cct Dimming G 2 cct Up/Dn Dimming M 1 cct Dimming + EM Wiring N 1 cct Dimming + EM Batt. Pack	1 120V 2 277V 3 347V	E Philips Advance 0-10V (1% dim)	W Standard White T Titanium Silver B Black C Custom


* Nominal values within a range. Consult photometry data for color temp, lumens & distribution of chosen configuration.

† Not all wiring types are available with all configurations. Consult Philips Ledalite for a complete list of available options.

Mounting Hardware

Mount Type
Consult separate mounting spec sheet for mount type options

Endcaps - Flat Grooved

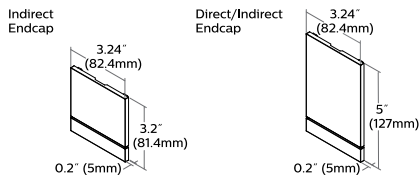

TruGroove Wall

5200 lm/4ft, Indirect/Direct Asym
3000/3500/4000K

Optical System

Upper hemisphere: White light emitted from a linear array of upward-facing LEDs is shaped into a homogeneous, wide-throw batwing distribution using either a freeform elliptical lens or an engineered light guide panel.

Lower hemisphere: White light emitted from a linear array of downward-facing LEDs is laterally redirected using either a biconvex lens or optical microstructures embedded in a layer of MesoOptics DX film. An extruded acrylic lens and MesoOptics film assembly then generates an optimal batwing distribution and a uniform continuum of light.

Endcaps

Diecast flat aluminum endcaps with integral groove to match housing.

Finish

High quality powder coated, available in matte white, black or titanium silver. Other custom colors available on request. White sensors only.

Housing

Precision aluminum extrusion, post painted.

Weight

Maximum: Suspended & Surface 3.9lb/ft, Wall 4.1lb/ft & 2'x2' Corner unit 21lb

Electrical

Factory pre-wired to section ends with quick-wire connectors.

Standard Drivers

Philips Advance Xitanium 0-10V, 1-100%.

Philips Advance Xitanium SR, 5-100% (for SpaceWise DT).

Class 2 rated output. Consult Philips Ledalite for other available drivers.

Standard Battery Pack

Philips Bodine, 90 min, 10W, Class 2 rated output.

Emergency lumen output = 10W x luminaire efficacy x 1.1.

Typical output: 1100lm.

Lumen Maintenance

At an ambient temperature of 25°C, the LED lumen maintenance expectation according to IES TM-21-11 is:

L80 (12k) 60,000 hrs (**Reported** methodology)

L80 (6k) 110,000 hrs (**Projected** methodology).

Source Color

LEDs rated for color rendering CRI >80, R9 >0 and fixture to fixture color accuracy within 2 SDCM.

Controls

Suspended version available with the following integrated controls:

Response daylight sensor (for single zone).

SpaceWise DT occupancy & daylight sensor w/ advanced grouping & dwell time.

SpaceWise DT commissioning via Android phone and Philips Field App. Compatible dimming wireless wall switches are available. For more information, please refer to www.philips.com/spacewise

Mounting

Suspended: Variable sling mount allows +/- 5" of horizontal adjustment from joint or end. Aircraft cable and tamper-resistant gripper provide unlimited vertical adjustment and are independently tested to stringent safety standards.

Wall: A hidden steel rail and bracket system attaches to the existing structure and supports housings close to the wall. Mount positioning is fully variable along the modules to accommodate site conditions, spaced up to 4½' on center and within 12" of an end or joint.

Surface: Fixture is mounted flush to surface using hidden brackets that attach to existing structure, variable between 0.6"-1.7" from end or joint.

Joints

Self-aligning joining system with hands-free pre-joining wire access.

Approvals

Certified to UL, CSA and IES standards. Certain symmetric indirect/direct and indirect versions are DesignLights Consortium® qualified. Please see the DLC QPL list for exact catalog numbers (www.designlights.org/QPL).

Warranty


Philips indoor professional luminaires 5 year LED warranty: <http://www.philips.com/warranties>

Environment

Rated for dry or damp locations in operating ambient temperatures 0-40°C (32-104°F). Certain luminaire components may be adversely affected by contaminants. Damage caused by sulfur, chlorine, petroleum based solutions or other contaminants in the area of operation are not covered under warranty. Not suitable for natatorium environments.

Due to continuing product improvements, Philips Ledalite reserves the right to change the specifications without notice.


Dimensions - Cross Section

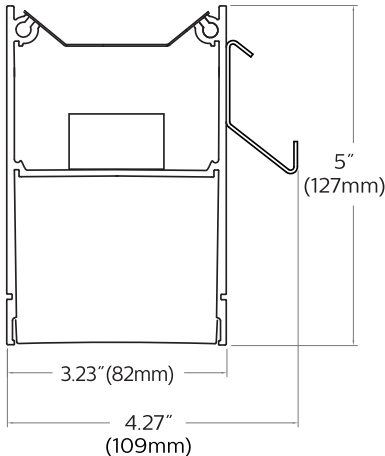

TruGroove Wall

5200 lm/4ft, Indirect/Direct Asym
3000/3500/4000K


Dimensions - Modules

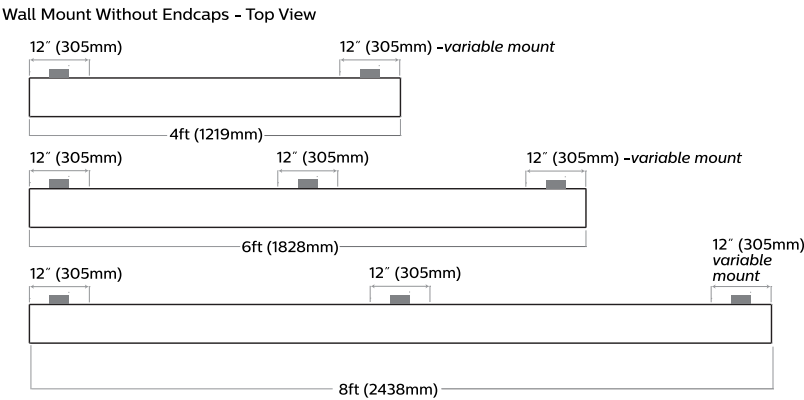

TruGroove Wall

5200 lm/4ft, Indirect/Direct Asym
3000/3500/4000K

Photometry - 3500K

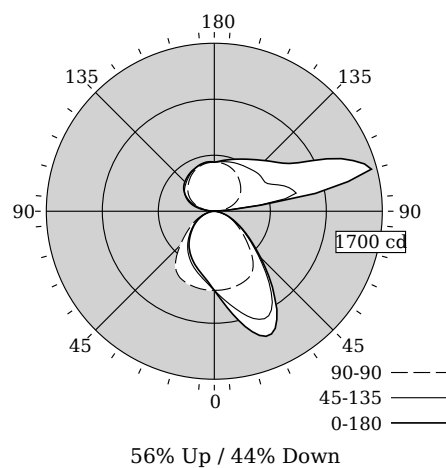

Candela Distribution

Vertical Angle	0	Horizontal Angle 45	90	135	180	Zonal Lumens
0	801	801	801	801	801	0
5	912	877	801	737	718	78
15	1208	1063	791	646	615	242
25	1370	1200	766	563	532	397
35	1065	1005	685	470	445	452
45	662	628	488	362	344	383
55	390	372	316	263	251	285
65	215	210	194	171	165	190
75	98	95	90	86	85	97
85	18	16	18	20	21	23
90	0	0	0	0	0	0
95	158	139	49	72	51	151
105	1646	824	161	225	191	534
115	1255	645	255	313	300	498
125	848	589	323	368	377	426
135	725	574	374	404	421	373
145	640	550	421	440	451	308
155	582	534	460	473	474	231
165	539	518	484	496	496	143
175	507	501	496	501	503	48
180	496	496	496	496	496	0

Values per 4ft unit

Fixture photometry has been conducted in accordance with IESNA LM-79-08

IES files for this and other photometric options can be downloaded online at www.lightingproducts.philips.com

Coefficients of Utilization (%)

RCR	Ceiling Wall:	70	80	50	30	10	70	80	50	30	10	0
0		106	106	106	106	97	97	97	80	80	80	44
1		97	93	89	86	89	85	82	71	69	67	38
2		89	82	76	71	81	75	70	63	59	56	33
3		81	72	65	59	74	66	60	56	51	47	28
4		74	64	56	51	68	59	52	50	45	41	24
5		68	57	49	43	62	53	46	44	39	35	21
6		63	51	43	38	58	47	40	40	35	31	19
7		58	46	39	33	53	43	36	36	31	27	17
8		54	42	35	29	50	39	32	33	28	24	15
9		50	38	31	26	46	36	29	30	25	22	14
10		47	35	28	23	43	33	26	28	23	20	13

Avg. Luminance (cd/m2)

Vertical Angle	0	Horizontal Angle 90	180
55	7301	5926	4704
65	5472	4933	4188
75	4061	3724	3521
85	2207	2207	2614

Distribution

Hemisphere	56% Up / 44% Down
Glare Control	Meets RP-1-12 recommendations for VDT-Normal spaces
Spacing Along (0 °)	1.66
Spacing Across (90 °)	1.34
Spacing at 180 °	0.92

TruGroove Wall

5200 lm/4ft, Indirect/Direct Asym

3000/3500/4000K

Optical Performance

Nominal CCT:	3000K	3500K	4000K
Flux (lm)	4784	4858	4881
Efficacy (lm/W)	103.1	104.7	104.7
Power (W)	46.4	46.4	46.6
CCT (K)	3105	3428	4070
CRI	81	82	83
R9	3	7	13
x	0.4322	0.4122	0.3783
y	0.4070	0.3999	0.3783
Duv	0.0020	0.0030	0.0010

Electrical Performance - 3500K

Input Voltage	120V	277V	347V
Input Power	46.4W	46.1W	38.9W
Input Current	0.39A	0.17A	0.12A
Power Factor	0.997	0.962	0.972
Total Harm. Distortion	7.0%	14.2%	9.0%
Tested values . contact technical support for rated values. Off-state power zero unless certain controls are specified.			

