






HPK518









Mounting instruction

4441 000 65181



Type No. 型号	Voltage/ Frequency 电压/ 频率		IP..				
			Prismatic Cover 棱镜反射罩	Aluminium Cover 铝反射器	150W	250W	400W
HPK518 1xHPL-N 250/400 W IC	220V/ 50Hz 230-240V/50Hz	HPL-N 250W/ 400W	43	65		7.5	8.5
HPK518 1xHPI-P 250/400 W IC	220V/ 50Hz 230-240V/50Hz	HPI-P 250W BU/ 400W BUS	43	65		7.5	8.5
HPK518 1xSON 150/250/400 W IC	220V/ 50Hz 230-240V/50Hz	SON 150W/250W/ 400 W	43	65	7.5	8.5	11

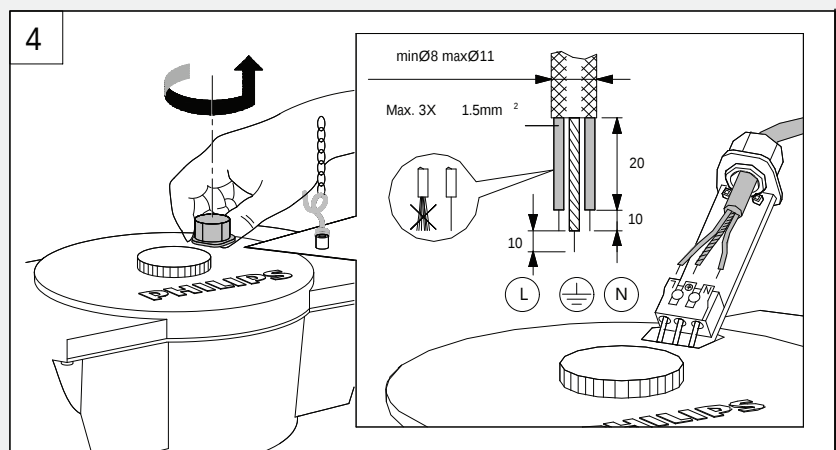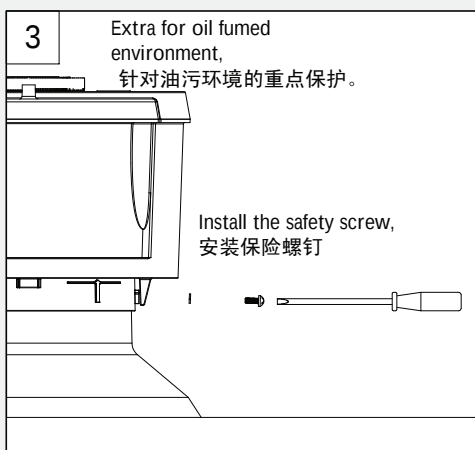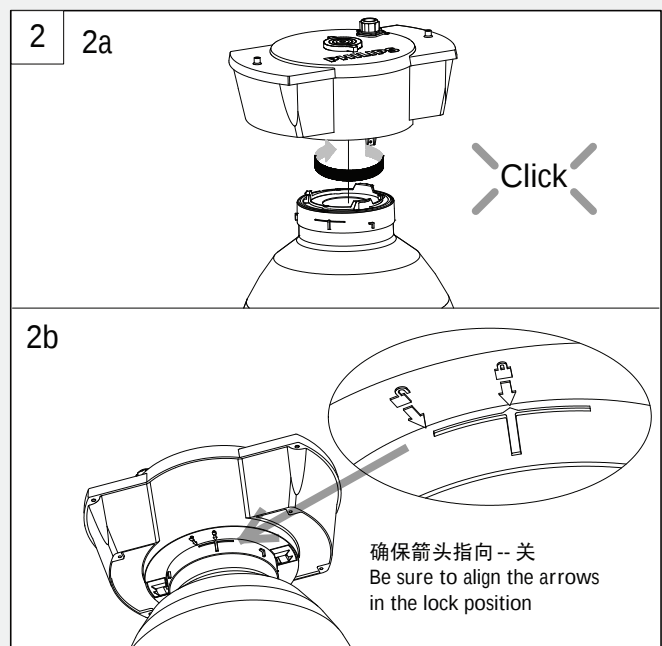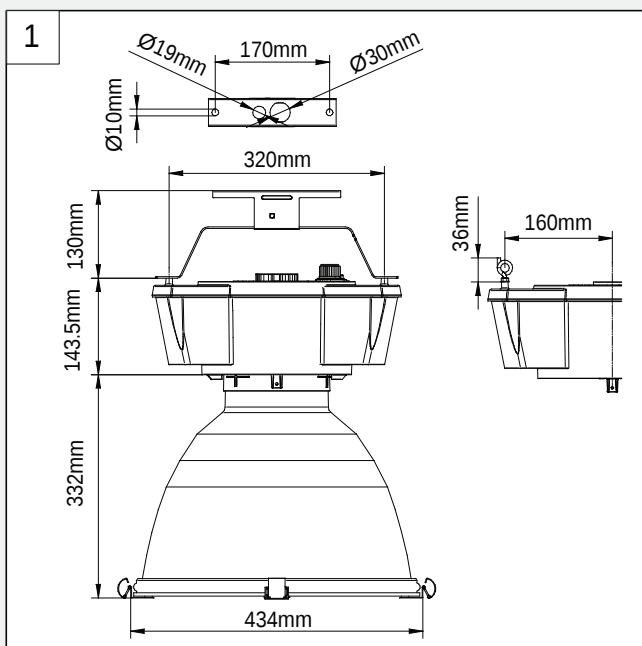

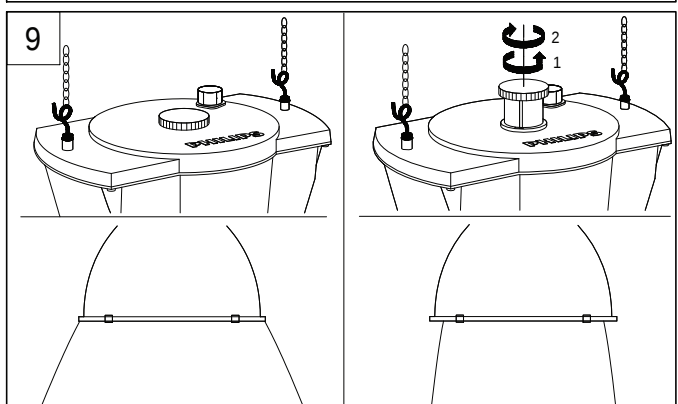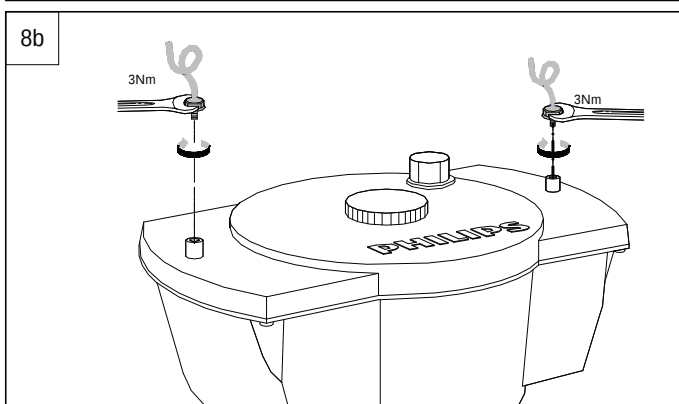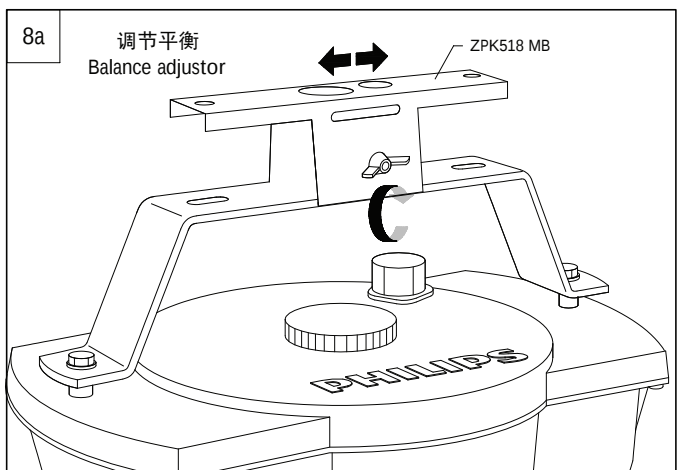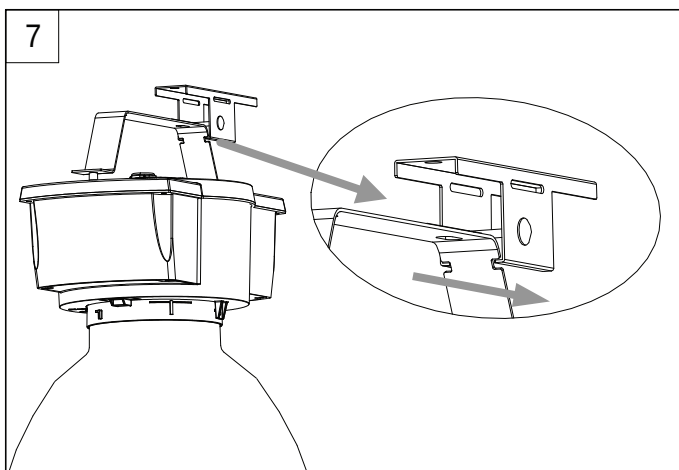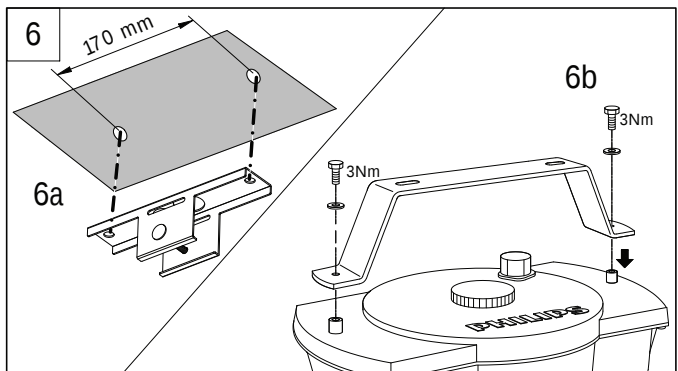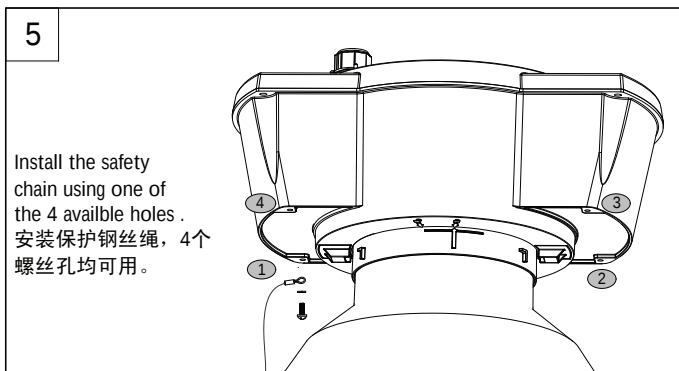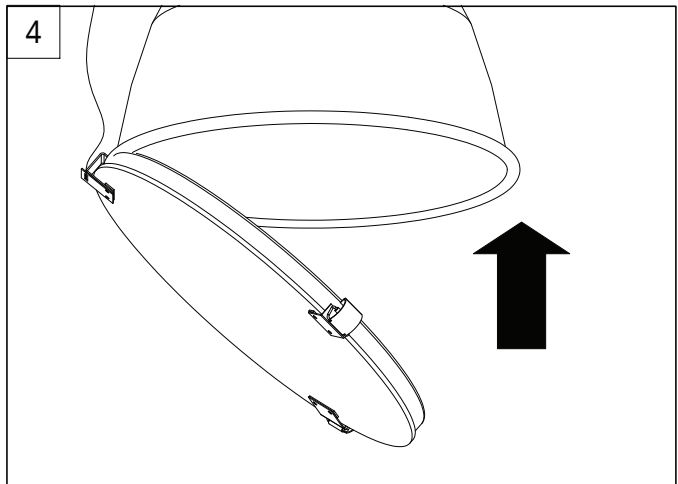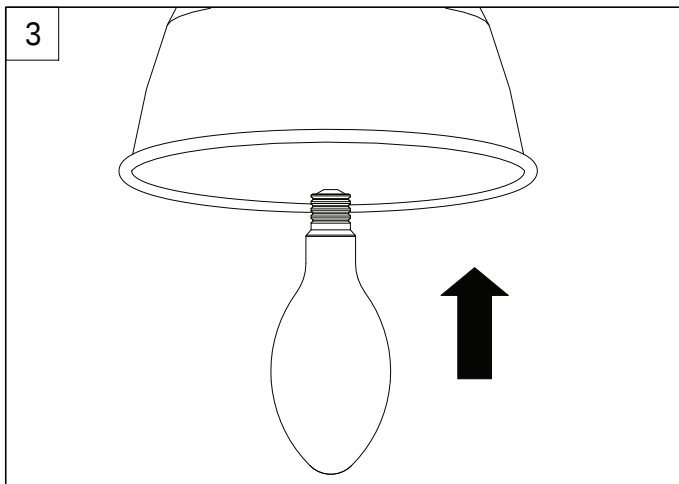

Important Notice/ 注意事项:

1. Please turn off the power before maintenance and lamp replacement.
须断开电源后，才能维修和更换光源。
2. The luminaire shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
灯具应由有资格的电工安装，接线要符合IEE电气标准或国家标准。
3. The luminaire shall, under no circumstance, be covered with insulation matting or similar material.
灯具不适合被隔热或类似材料覆盖。