



The most energy-efficient reliable white light solution for Outdoor

MASTER CosmoWhite CPO-TW & CPO-TW Xtra

New-generation ceramic metal halide lamps used in Outdoor offering efficient and pleasant white light

Benefits

- Attractive white light
- Best optical efficacy allows greater spacing between luminaires, thereby reducing investment
- Highest energy saving and lowest cost of ownership

Features

- Highly efficient white light
- Long reliable lifetime combined with highest system efficacy
- Unique new burner design and positioning in combination with best lamp fixation (PGZ12) provides best optical efficacy
- Compact size: 50% smaller than SON/HPL systems
- New electronic gear platform including dimming options

Application

- Urban public lighting for city centers, residential areas and roads

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)

MASTER CosmoWhite CPO-TW & CPO-TW Xtra

Versions




LPPR CPO-TW 0003



LPPR CPO-TW 0001

Dimensional drawing



| Product | D (max) | D | O | L | C (max) |
|--|---------|-------|-------|-------|---------|
| MST CosmoWh CPO-TW Xtra 140W/728 PGZ12 | 20 mm | 19 mm | 22 mm | 66 mm | 150 mm |
| MST CosmoWh CPO-TW Xtra 60W/728 PGZ12 | 20 mm | 19 mm | 14 mm | 59 mm | 132 mm |
| MST CosmoWh CPO-TW Xtra 90W/728 PGZ12 | 20 mm | 19 mm | 18 mm | 66 mm | 143 mm |

| General Information | |
|------------------------------------|------------|
| Cap-Base | PGZ12 |
| Operating Position | UNIVERSAL |
| Light Technical | |
| Chromaticity Coordinate X (Nom) | 0.447 |
| Chromaticity Coordinate Y (Nom) | 0.4 |
| Color Designation | White (WH) |
| Correlated Color Temperature (Nom) | 2800 K |
| Controls and Dimming | |
| Dimmable | Yes |
| Mechanical and Housing | |
| Bulb Finish | Clear |
| Bulb Shape | T19 |

Light Technical

| Order Code | Full Product Name | Color rendering index (CRI) | Luminous Efficacy (rated) (Nom) | Luminous Flux |
|--------------|--|-----------------------------|---------------------------------|---------------|
| 928088805127 | MST CosmoWh CPO-TW Xtra 140W/728 PGZ12 | 72 | 125 lm/W | 17,600 lm |
| 928088505127 | MST CosmoWh CPO-TW Xtra 60W/728 PGZ12 | 73 | 120 lm/W | 7,200 lm |
| 928093505127 | MST CosmoWh CPO-TW Xtra 90W/728 PGZ12 | 70 | 120 lm/W | 10,800 lm |

Operating and Electrical


| Order Code | Full Product Name | Voltage (Nom) | Power Consumption |
|--------------|--|---------------|-------------------|
| 928088805127 | MST CosmoWh CPO-TW Xtra 140W/728 PGZ12 | 94 V | 141.0 W |
| 928088505127 | MST CosmoWh CPO-TW Xtra 60W/728 PGZ12 | 92 V | 60.0 W |

| Order Code | Full Product Name | Voltage (Nom) | Power Consumption |
|--------------|---------------------------------------|---------------|-------------------|
| 928093505127 | MST CosmoWh CPO-TW Xtra 90W/728 PGZ12 | 92 V | 90.0 W |

MASTER CosmoWhite CPO-TW & CPO-TW Xtra

Approval and Application

| Order Code | Full Product Name | Energy | Mercury | Mercury |
|--------------|--|-------------|--------------|--------------|
| | | Consumption | (Hg) Content | (Hg) Content |
| | | kWh/1000 h | (Max) | (Nom) |
| 928088805127 | MST CosmoWh CPO-TW Xtra 140W/728 PGZ12 | 141 kWh | 3.9 mg | 3.9 mg |
| 928088505127 | MST CosmoWh CPO-TW Xtra 60W/728 PGZ12 | 60 kWh | 2 mg | 2.0 mg |
| 928093505127 | MST CosmoWh CPO-TW Xtra 90W/728 PGZ12 | 90 kWh | 3 mg | 3.0 mg |

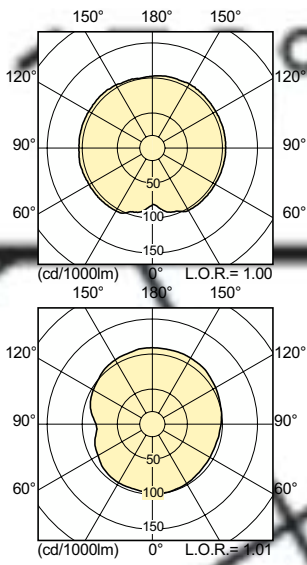

120°

90°

MASTER CosmoWhite CPO-TW & CPO-TW Xtra

