

## Product Description

### Gear for SDW-T lamps

CSLS electronic control unit with impregnated (HID 'BASIC' ) or encapsulated (HID 'Heavy Duty' ) electromagnetic ballasts

#### Benefits

- Electronic control unit ensures reliable starting and stabilizes lamp power for optimum performance (minimum color deviation)
- Simple installation and cabling


#### Features

- Ballasts and electronic control units equipped with screw terminal blocks; other contact possibilities for
- Earthing-while-mounting facility (HID 'BASIC' ballasts), separate earth terminal (HID 'Heavy Duty' )

#### Application



- Similar to those of the related lamps

#### Versions

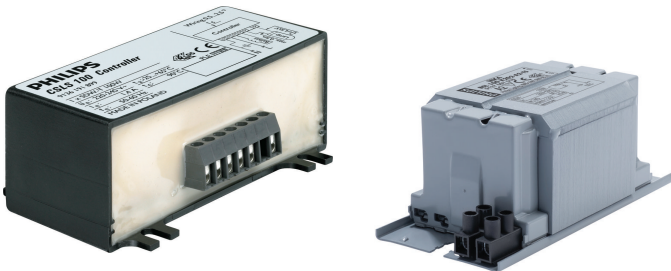


## Gear for SDW-T lamps

### Dimensional drawing



Product	A1	A2	B1	C1	D1
BSL 100 K202-A2-TS 230V 50Hz	123 mm	98 mm	61 mm	52 mm	6.2 mm



Product	D1	C1	A1	A2	B1	B2
CSLS 100 SDW-T 220-240V 50/60Hz	4.5 mm	39.5 mm	98.0 mm	70.0 mm	58.5 mm	46.0 mm

### General Information

Number Of Lamps	1 piece/unit
Lamp Type	SDW-T

### Operating and Electrical

Order Code	Full Product Name	Input Frequency	Input Voltage
90870430	CSLS 100 SDW-T 220-240V 50/60Hz	50 to 60 Hz	220 to 240 V

Order Code	Full Product Name	Input Frequency	Input Voltage
74076700	BSL 100 K202-A2-TS 230V 50Hz	50 Hz	230 V

### System characteristics

Order Code	Full Product Name	Rated Ballast-Lamp Power
90870430	CSLS 100 SDW-T 220-240V 50/60Hz	100 W

Order Code	Full Product Name	Rated Ballast-Lamp Power
74076700	BSL 100 K202-A2-TS 230V 50Hz	150/100 W

