



Product Description

MASTER HPI Plus

Quartz metal halide lamps with opalized outer bulb

Benefits

- High safety and comfort level, maintained over life
- High safety and comfort level, maintained over life
- Minimal maintenance cost
- Minimal maintenance cost
- Initial investment saving options with "Plus"-concept and "S" and "P"-types
- Initial investment saving options with "Plus"-concept and "S" and "P"-types
- Adjustable atmosphere creation by using appropriate color temperature
- Adjustable atmosphere creation by using appropriate colour temperature

Features

- Ovoid, internally white coated outer bulb
- Ovoid, internally white coated outer bulb
- Unique 3-band technology resulting in high luminous efficacy, both initially and over long lifetime
- Unique 3-band technology resulting in high luminous efficacy, both initially and over long lifetime
- Available in cool white and daylight color appearance demonstrating good color stability
- Available in cool white and daylight colour appearance demonstrating good colour stability
- "S"-type for direct retrofit for HPL lamps
- "S"-type for direct retrofit for HPL lamps
- "P"-type for use without protective front shield
- "P"-type for use without protective front shield

MASTER HPI Plus


Application

- High bay lighting, e.g. industrial workshops, exhibition halls, hypermarkets, shopping malls, DIY stores, churches, airports and train stations
- High bay lighting, e.g. industrial workshops, exhibition halls, hypermarkets, shopping malls, DIY stores, churches, airports and train stations

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- For use with control gear designed for high-pressure mercury or sodium lamps
- For use with control gear designed for high-pressure mercury or sodium lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing



Product	D (max)	C (max)
HPI PLUS 400W/645 BUS E40 1SL/6	122 mm	290 mm
MASTER HPI Plus 250W/645 BU E40 1SL/12	91 mm	226 mm
MASTER HPI Plus 400W/645 BU E40 1SL/6	122 mm	290 mm

General Information	
Cap-Base	E40
Light Technical	
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4500 K
Color rendering index (CRI)	65
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Coated glass

General Information

Order Code	Full Product Name	Operating Position
928074309891	MASTER HPI Plus 400W/645 BU E40 1SL/6	H15

MASTER HPI Plus

Order Code	Full Product Name	Operating Position
928076709891	MASTER HPI Plus 250W/645 BU E40 1SL/12	H15

Order Code	Full Product Name	Operating Position
928481200093	HPI PLUS 400W/645 BUS E40 1SL/6	H

Light Technical

Order Code	Full Product Name	Chromaticity Coordinate X (Nom)	Chromaticity Coordinate Y (Nom)	Luminous Efficacy (rated) (Nom)
928074309891	MASTER HPI Plus 400W/645 BU E40 1SL/6	367	374	80 lm/W
928076709891	MASTER HPI Plus 250W/645 BU E40 1SL/12	365	363	66 lm/W

Order Code	Full Product Name	Chromaticity Coordinate X (Nom)	Chromaticity Coordinate Y (Nom)	Luminous Efficacy (rated) (Nom)
928481200093	HPI PLUS 400W/645 BUS E40 1SL/6	367	374	79 lm/W

Operating and Electrical

Order Code	Full Product Name	Voltage (Nom)	Power Consumption
928074309891	MASTER HPI Plus 400W/645 BU E40 1SL/6	125 V	405 W
928076709891	MASTER HPI Plus 250W/645 BU E40 1SL/12	128 V	256 W

Order Code	Full Product Name	Voltage (Nom)	Power Consumption
928481200093	HPI PLUS 400W/645 BUS E40 1SL/6	125 V	405 W


Mechanical and Housing

Order Code	Full Product Name	Bulb Shape
928074309891	MASTER HPI Plus 400W/645 BU E40 1SL/6	BD120
928076709891	MASTER HPI Plus 250W/645 BU E40 1SL/12	BD90

Order Code	Full Product Name	Bulb Shape
928481200093	HPI PLUS 400W/645 BUS E40 1SL/6	BD120

Approval and Application

Order Code	Full Product Name	Energy Consumption kWh/1000 h	Mercury (Hg) Content (Nom)
928074309891	MASTER HPI Plus 400W/645 BU E40 1SL/6	446 kWh	67 mg
928076709891	MASTER HPI Plus 250W/645 BU E40 1SL/12	282 kWh	47 mg
928481200093	HPI PLUS 400W/645 BUS E40 1SL/6	434 kWh	67 mg

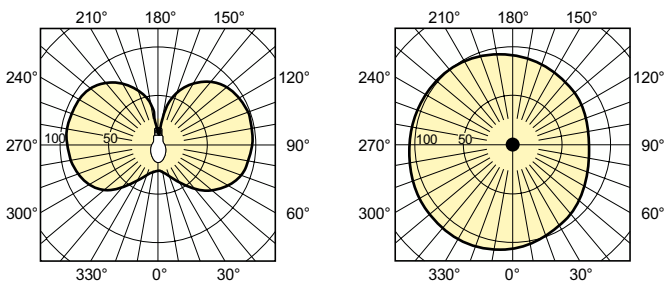

MASTER HPI Plus

