



Product Description

SON

High Pressure Sodium lamp with opalized ovoid outer bulb

Benefits

- SON is a cost-efficient and reliable solution in High Pressure Sodium

Features

- Ovoid, internally white coated outer bulb
- High luminous efficacy
- Robust construction is vibration- and shock-resistant leading to a reliable life
- Dimming possible with dedicated gear


Application

- Road and residential lighting
- Decorative floodlighting
- Commercial and industrial applications

Versions



Dimensional drawing



Product	D (max)	C (max)
SON 400W E E40 CO 1SL/12	122 mm	290 mm
SON 250W E E40 CO 1SL/12	91 mm	226 mm
SON 150W E E40 CO 1SL/12	91 mm	226 mm
SON 70W E E27 CO 1CT/24	71 mm	156 mm
SON 70W/220 I E27 1CT/24	71 mm	155 mm

Controls and Dimming

Dimmable	Yes
----------	-----

General Information

Life To 50% Failures (Nom)	28000 h
Operating Position	UNIVERSAL

Luminaire Design Requirements

Bulb Temperature (Max)	350 °C
------------------------	--------

Light Technical

Colour Code	220
Correlated Colour Temperature (Nom)	2000 K
Colour Rendering Index (Max)	25

Mechanical and Housing

Bulb Finish	Coated
-------------	--------

Approval and Application

Order Code	Full Product Name	Energy Consumption kWh/1000 h	Energy Efficiency Label (EEL)	Mercury (Hg) Content (Nom)
18186230	SON 70W/220 I E27 1CT/24	77 kWh	A	16.3 mg
21024130	SON 70W E E27 CO 1CT/24	77 kWh	A	16.3 mg
21028915	SON 150W E E40 CO 1SL/12	162 kWh	A+	20.4 mg
21038815	SON 250W E E40 CO 1SL/12	275 kWh	A+	20.4 mg
21032615	SON 400W E E40 CO 1SL/12	440 kWh	A+	24.5 mg

Operating and Electrical (1/2)

Order Code	Full Product Name	Lamp			
		Current (EM) (Nom)	Voltage (Max)	Voltage (Min)	Voltage (Nom)
18186230	SON 70W/220 I E27 1CT/24	0.98 A	105 V	75 V	90 V
21024130	SON 70W E E27 CO 1CT/24	0.98 A	105 V	75 V	90 V
21028915	SON 150W E E40 CO 1SL/12	1.8 A	115 V	85 V	100 V

Order Code	Full Product Name	Lamp			
		Current (EM) (Nom)	Voltage (Max)	Voltage (Min)	Voltage (Nom)
21038815	SON 250W E E40 CO 1SL/12	3 A	115 V	85 V	100 V
21032615	SON 400W E E40 CO 1SL/12	4.45 A	120 V	90 V	105 V

Operating and Electrical (2/2)

Order Code	Full Product Name	Power (Rated) (Nom)	Re-Ignition Time	
			(Min)	(Max)
18186230	SON 70W/220 I E27 1CT/24	70.0 W	-	-
21024130	SON 70W E E27 CO 1CT/24	70.0 W	180 s	-
21028915	SON 150W E E40 CO 1SL/12	147.0 W	180 s	-

Order Code	Full Product Name	Power (Rated) (Nom)	Re-Ignition Time	
			(Min)	(Max)
21038815	SON 250W E E40 CO 1SL/12	250 W	120 s	-
21032615	SON 400W E E40 CO 1SL/12	400.0 W	120 s	-

General Information (1/2)

Order Code	Full Product Name	Cap-Base	Life To 10%	Life To 20%	Life To 5%
			Failures (Nom)	Failures (Nom)	Failures (Nom)
18186230	SON 70W/220 I E27 1CT/24	E27	13000 h	18000 h	10000 h
21024130	SON 70W E E27 CO 1CT/24	E27	-	22000 h	12000 h
21028915	SON 150W E E40 CO 1SL/12	E40	-	20000 h	12000 h

Order Code	Full Product Name	Cap-Base	Life To 10%	Life To 20%	Life To 5%
			Failures (Nom)	Failures (Nom)	Failures (Nom)
21038815	SON 250W E E40 CO 1SL/12	E40	-	20000 h	12000 h
21032615	SON 400W E E40 CO 1SL/12	E40	-	20000 h	12000 h

General Information (2/2)

Order Code	Full Product Name	LSF 12000 h	LSF 16000 h	LSF 2000 h	LSF 20000 h	LSF 4000 h	LSF 6000 h	LSF 8000 h	System Description
		Rated	Rated	Rated	Rated	Rated	Rated	Rated	
18186230	SON 70W/220 I E27 1CT/24	92 %	84 %	99 %	74 %	99 %	98 %	97 %	Internal Ignitor (I)
21024130	SON 70W E E27 CO 1CT/24	94 %	86 %	99 %	76 %	99 %	99 %	98 %	External Ignitor (E)
21028915	SON 150W E E40 CO 1SL/12	-	-	-	-	-	-	-	External Ignitor (E)
21038815	SON 250W E E40 CO 1SL/12	-	-	-	-	-	-	-	External Ignitor (E)
21032615	SON 400W E E40 CO 1SL/12	-	-	-	-	-	-	-	External Ignitor (E)

Light Technical (1/3)

Order Code	Full Product Name	Chromaticity Coordinate X	Chromaticity Coordinate Y	Colour Rendering Index (Nom)	LLMF 12000 h Rated	Order Code	Full Product Name	Chromaticity Coordinate X	Chromaticity Coordinate Y	Colour Rendering Index (Nom)	LLMF 12000 h Rated
		(Nom)	(Nom)	(Nom)	Rated			(Nom)	(Nom)	(Nom)	Rated
18186230	SON 70W/220 I E27 1CT/24	540	415	-	80 %	21038815	SON 250W E E40 CO 1SL/12	-	-	-	-
21024130	SON 70W E E27 CO 1CT/24	-	-	-	81 %	21032615	SON 400W E E40 CO 1SL/12	-	-	-	-
21028915	SON 150W E E40 CO 1SL/12	-	-	-	-						

Light Technical (2/3)

Order Code	Full Product Name	LLMF 16000 h	LLMF 2000 h	LLMF 20000 h	LLMF 4000 h	LLMF 6000 h	LLMF 8000 h	Lumen Maintenance 10000 h (Min)	Lumen Maintenance 10000 h (Nom)	Lumen Maintenance 2000 h (Min)
		Rated	Rated	Rated	Rated	Rated	Rated			
18186230	SON 70W/220 I E27 1CT/24	79 %	88 %	78 %	84 %	83 %	81 %	70 %	81 %	80 %
21024130	SON 70W E E27 CO 1CT/24	79 %	93 %	78 %	89 %	86 %	84 %	-	85 %	85 %
21028915	SON 150W E E40 CO 1SL/12	-	-	-	-	-	-	80 %	85 %	90 %
21038815	SON 250W E E40 CO 1SL/12	-	-	-	-	-	-	90 %	95 %	95 %
21032615	SON 400W E E40 CO 1SL/12	-	-	-	-	-	-	81 %	88 %	94 %


Light Technical (3/3)

Order Code	Full Product Name	Lumen Maintenance 2000 h (Nom)	Lumen Maintenance 20000 h	Lumen Maintenance 5000 h (Min)	Lumen Maintenance 5000 h (Nom)	Luminous Efficacy (rated) (Nom)	Luminous Flux (Rated) (Min)	Luminous Flux (Rated) (Nom)
18186230	SON 70W/220 I E27 1CT/24	88 %	78 %	75 %	83.5 %	80 lm/W	5040 lm	5600 lm
21024130	SON 70W E E27 CO 1CT/24	93 %	-	80 %	88 %	80 lm/W	4500 lm	5600 lm
21028915	SON 150W E E40 CO 1SL/12	95 %	-	85 %	90 %	93 lm/W	12375 lm	13750 lm
21038815	SON 250W E E40 CO 1SL/12	98 %	-	92 %	96 %	106 lm/W	22500 lm	27000 lm
21032615	SON 400W E E40 CO 1SL/12	97 %	-	88 %	94 %	122 lm/W	42000 lm	48000 lm


Mechanical and Housing

Order Code	Full Product Name	Bulb Shape	Order Code	Full Product Name	Bulb Shape
18186230	SON 70W/220 I E27 1CT/24	B70	21038815	SON 250W E E40 CO 1SL/12	ED90
21024130	SON 70W E E27 CO 1CT/24	BF70	21032615	SON 400W E E40 CO 1SL/12	ED120
21028915	SON 150W E E40 CO 1SL/12	ED90			

Colour Rendering Diagrams



SON

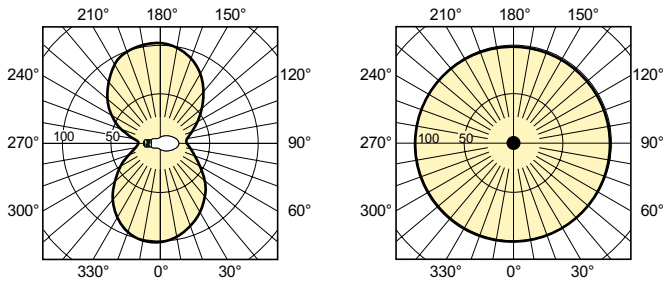

© 2018 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their respective owners.

www.lighting.philips.com
2018, December 17 – data subject to change