



# Product Description

## Aluline 111

Low-voltage halogen reflector lamp with high-purity aluminium reflector of 111 mm

### Benefits

- Glare free, well defined accent lighting with minimum amount of direct glare from the lamp

### Features

- Metal cap to shield filament to reduce glare and improve beam shape
- G53 socket and screw or tab terminals allowing for direct wire connection with imating eyelet or receptacle
- UV-block quartz glass

### Application


- Excellent light source for general lighting and especially creative accent lighting in shops, restaurants, hotels, galleries, exhibitions and museums

### Versions




Aluline 111


Dimensional drawing

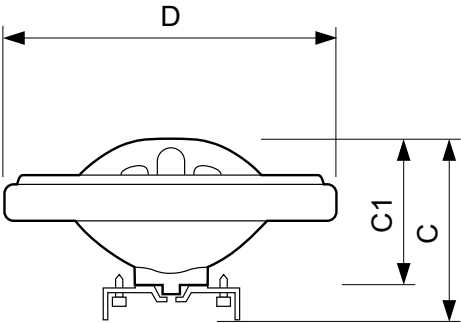


Product	D (max)	C (max)	C1 (max)
Aluline 111 50W G53 12V 24D 1CT/6	111 mm	67 mm	51 mm



Accent Diagrams



Beam Diagrams

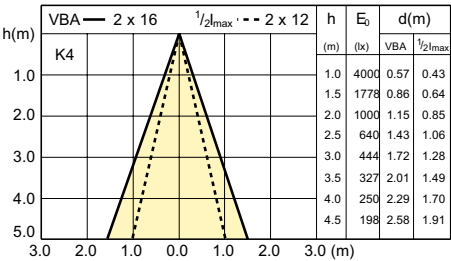

LDBE\_HALUACN\_50W\_24D-Beam diagram

