



# TTX260 – low-cost investment, good performance

## TTX260

TTX260 is a value-for-money, versatile light-line solution – it can be used with or without (low-cost) reflectors, and the family easily covers most applications. This simple, two-component system features a clever design that avoids the use of a geartray. And T5 miniaturization minimizes the use of materials. These factors make TTX260 a low-cost investment, and yet its relatively high light output ratio ensures good lighting performance. What's more, installation costs are minimized thanks to the place-and-click fitting system, which requires no special tools or training. Sturdy, yet slim and stylish, TTX260 has a look similar to the popular Maxos light-lines.

### Benefits

- Functionality and performance at a favorable price and TCO
- Flexible: line can be used without reflectors or with different kinds of reflector; no geartray required
- Covers a wide range of applications and installation heights

### Features

- Two-component architecture, accommodating high-output reflectors
- Minimized yet sturdy design
- Click system, highly appreciated by users
- Fully compliant: EMC, RoHS, etc.

### Application

- Retail: supermarkets, hypermarkets, discount stores, department stores, DIY stores
- Industry: warehouses, production areas

### Specifications


|               |   |
|---------------|---|
| Type          | TTX260  |
| Light source  | Fluorescent: <ul style="list-style-type: none"><li>- 1 x or 2 x MASTER TL5 HO / G5 / 24, 39, 49, 54, 80 W*</li><li>- 1 x or 2 x MASTER TL-D Super 80 / G13 / 58, 70 W*</li></ul> Also Xtreme and Xtra lamp versions are possible<br>*Per trunking unit  |
| Lamp included | Yes (lamp color 830 or 840)   |
| Ballast       | Electronic, High Frequency 220 - 240 V / 50 - 60 Hz: <ul style="list-style-type: none"><li>- Performer (HFP)</li><li>- Regulator, DALI (HFD)</li><li>- Regulator, 1-10 V (HFR)</li><li>- Performer, intelligent, multi-watt (HFP-I)</li></ul>   |
| Reflector     | Mirror high-gloss /specular (C)   |
| Optic         | White without louver (WR)<br>White, perforated (WRP)<br>High gloss (C)<br>High gloss, wide beam (C-WB)<br>High gloss, medium beam (C-MB)<br>High gloss, narrow beam (C-NB)<br>High gloss, asymmetrical beam (C-A)<br>High gloss, double asymmetrical beam (C-DA)<br>High gloss, perforated, wide beam (CP-WB)<br>High gloss, perforated, medium beam (CP-MB)<br>High gloss, perforated, narrow beam (CP-NB) |

|              |  |
|--------------|--|
| Options      | Emergency lighting (integrated): <ul style="list-style-type: none"><li>- 1 hour (EL1)</li><li>- 3 hours (EL3)</li></ul> Lamps wired in parallel as circuit option (PL)<br>Lamps wired in line as circuit option (LN)<br>Separate switch (DS) |
| Material     | Housing: aluminum<br>Reflectors: steel (white versions) and aluminum (all others versions)   |
| Colors       | White (WH) and silver (SI)   |
| Installation | Suspended by wire and equipped with pre-mounted mechanical coupling and through-wiring connector<br>Operating temperature: - 10°C < T  |
| Accessories  | Dedicated trunking accessories ZTX260 available  |

Versions



Product details

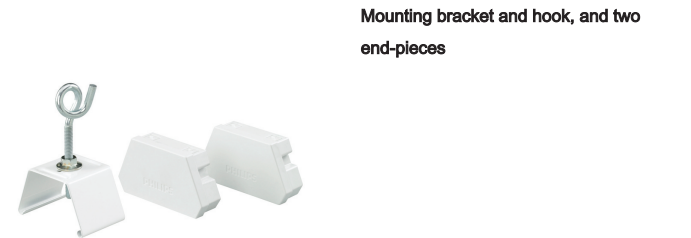

Product details

Mounting bracket and hook, and two end-pieces



End-piece



End-piece



External cable clip

