



Product Description

Blue (/52) TL/TL-D

Tubular or compact single-ended low-pressure mercury vapour fluorescent lamps

Benefits

- Optimal spectrum for various applications

Features

- Emit radiation for therapeutic and other applications

Application

- Medical treatment of jaundice in new-born babies (hyperbilirubinaemia)

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take them to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Photobiological safety – IEC 62471 – Risk Group 2. CAUTION – Possibly hazardous optical radiation emitted from these products.


Versions



XPPR XUATL G13

Blue (/52) TL/TL-D

Dimensional drawing

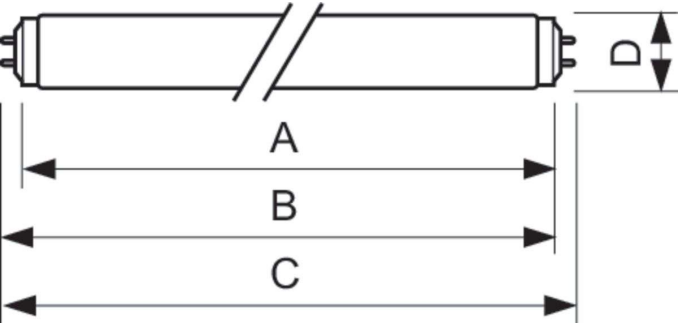

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL 20W/52 SLV/25	40.5 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

