



# RCS750 3-circuit square track system – flexible and multifunctional

## 3-circuit Square RCS750

The RCS750 3-circuit square track system is made up of a solid aluminium track available in lengths of 1, 2, 3 and 4 m with four electrical conductors. Any given configuration can be created easily: horizontal or vertical, mounted on or in the ceiling, on the wall or on free-standing panels. The system can also be used as a floating structure. All luminaires have a separate power supply and can be switched selectively. They can be moved easily to change the lighting and presentation. In this way, a multifunctional track system can be created for accent lighting as well as for suspending advertising and decorative material. A range of adaptors, power supply connections and mounting accessories is also available.

### Benefits

- Flexible 3-circuit track system for the professional user, allowing any required configuration to be created relatively easily
- All luminaires have separate power switching so they can easily be moved, for example to create changing atmospheres in shop windows or interiors
- Can be applied as a 'floating' structure using the suspension tubes and clamps provided

### Features

- -

### Application

- Retail
- Indoor architectural lighting

# 3-circuit Square RCS750

## Specifications


<b>Type</b>	RCS750
<b>Circuit</b>	3-circuit power track (3C)
<b>Length version</b>	1000 in mm (L1000) 2000 in mm (L2000) 3000 in mm (L3000) 4000 in mm (L4000)
<b>Color</b>	White (WH) Black (BK) Aluminum (ALU)

<b>Installation</b>	Three circuits 250 V AC, 16 A, 3 x 3,7 KvA (total power supply) Also possible to connect a 3-phase supply (230 - 400 V 16 A) when there will be a threefold increase in power rating i.e. 11.1 kW Integrated fastening holes (distance 1000 mm, load 5 x 5 kg max, torque 2.5 Nm)
<b>Accessory</b>	Range of adapters, power supply connections and mounting accessories
<b>Main applications</b>	Retail

## Versions



## Dimensional drawing

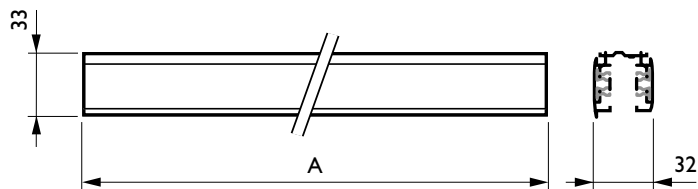

Product
RCS750 3C L3000 WH (XTS4300-3)
RCS750 3C L1000 WH (XTS4100-3)

## Product details



## 3-circuit Square RCS750

### General Information

Mechanical accessories	No
------------------------	----

### Approval and Application

Order Code	Full Product Name	Ingress protection code
910500188815	RCS750 3C L1000 WH (XTS4100-3)	IP30
910500189015	RCS750 3C L3000 WH (XTS4300-3)	IP30

Order Code	Full Product Name	Ingress protection code
910502558518	ZRS750 EPSR BK (XTS11-2+41-2)	-
910502558718	ZRS750 ICP BK (XTS21-2)	-

### Operating and Electrical

Order Code	Full Product Name	Input Voltage
910500188815	RCS750 3C L1000 WH (XTS4100-3)	-
910500189015	RCS750 3C L3000 WH (XTS4300-3)	-

Order Code	Full Product Name	Input Voltage
910502558518	ZRS750 EPSR BK (XTS11-2+41-2)	250 V
910502558718	ZRS750 ICP BK (XTS21-2)	250 V

### General Information

Order Code	Full Product Name	Accessory colour	Glow-wire test	Suspension accessories	Type description
910500188815	RCS750 3C L1000 WH (XTS4100-3)	White	850/5	No	-
910500189015	RCS750 3C L3000 WH (XTS4300-3)	White	850/5	No	-

Order Code	Full Product Name	Accessory colour	Glow-wire test	Suspension accessories	Type description
910502558518	ZRS750 EPSR BK (XTS11-2+41-2)	Black	-	No	SUPPLY LEFT
910502558718	ZRS750 ICP BK (XTS21-2)	Black	-	-	INLINE COUPLER

### Mechanical and Housing

Order Code	Full Product Name	Length
910500188815	RCS750 3C L1000 WH (XTS4100-3)	1000 mm
910500189015	RCS750 3C L3000 WH (XTS4300-3)	3000 mm

Order Code	Full Product Name	Length
910502558518	ZRS750 EPSR BK (XTS11-2+41-2)	-
910502558718	ZRS750 ICP BK (XTS21-2)	-

