



# Simple installation, no hidden costs and maximum maintenance savings

## MasterClass LEDtube Mains T8

Philips MasterClass MainsFit (UL Type-B) T8 LED lamps use a double-ended design which significantly simplifies installation, saving installation time and costs. This ballast bypass product replaces either T8 or T12 lamps in fixtures containing shunted or non-shunted G13 (medium bi-pin) lamp holders for over 40% energy savings.

### Benefits

- Reliable performance – color and lumen maintenance
- Double-ended design installs in about half the time as single-ended type-B solutions
- Reduces lighting complexity – integrated driver

### Features


- Operates on both shunted and non-shunted sockets, which means no need to replace sockets
- DLC, NSF and RoHS listed
- Philips proprietary safety features
- Available shatter-resistant polycarbonate construction
- 5-year warranty and 50,000-hour life standard

### Application

- Office and Retail
- Industrial and warehouses
- Parking lots and covered car parks


# MasterClass LEDtube Mains T8

## Versions



LEDtube G13

## Dimensional drawing

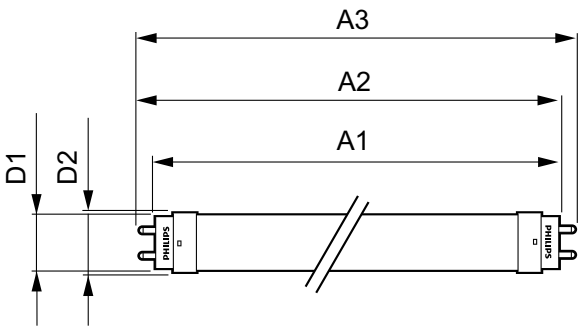

Product	D1	D2	A1	A2	A3
12T8/PER/48-840/BB18/G 10/1 FB	25.7 mm	28 mm	1198 mm	1205 mm	1212 mm
12T8/PER/48-835/BB17/G 10/1 FB	25.7 mm	28 mm	1198 mm	1205 mm	1212 mm

# MasterClass LEDtube Mains T8

Controls and Dimming	
Dimmable	No
Operating and Electrical	
Input Frequency	50 to 60 Hz
Voltage (Nom)	120-277 V
Power (Rated) (Nom)	12 W
Starting Time (Nom)	0.5 s
General Information	
Cap-Base	G13
Nominal Lifetime (Nom)	50000 h
Rated Lifetime (Hours)	50000 h
Switching Cycle	50000X
Light Technical	
Beam Angle (Nom)	240 °
Color Rendering Index (Nom)	80
Llmf At End Of Nominal Lifetime (Nom)	70 %
Rated Beam Angle	240 °
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Case Maximum (Nom)	70 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C

## Light Technical

Order Code	Full Product Name	Color Code	Correlated Color Temperature (Nom)	Luminous Flux (Nom)	Luminous Flux (Rated) (Nom)
929001876904	12T8/PER/48-835/ BB17/G 10/1 FB	835	3500 K	1700 lm	1700 lm
929001877004	12T8/PER/48-840/ BB18/G 10/1 FB	840	4000 K	1800 lm	1800 lm

