

INSTALLATION INSTRUCTIONS

INDIRECT LED GARAGE LUMINAIRE – YOKE MOUNT


Philips Lighting North America
Corporation
200 Franklin Square Drive,
Somerset, NJ 08873, USA

Philips Lighting Canada Ltd.
281 Hillmount Road,
Markham ON, Canada L6C 2S3

IMPORTANT: READ ALL INSTRUCTIONS BEFORE PERFORMING ANY WORK. BE SURE ALL POWER IS OFF PRIOR TO INSTALLING LUMINAIRES.

WARNING: FIXTURE MUST BE GROUNDED IN ACCORDANCE WITH APPROPRIATE CODES. FAILURE TO DO SO MAY RESULT IN SERIOUS INJURY.

- The yoke mounted luminaire arrives with the yoke detached. Attach the fixture side trunion using the seven (7) 10-24 thread forming screws (included). Torque screws to 28-46 in. lbs. Holes on the side of the yokes allow bolts and nuts (included) to attach the ceiling side trunion and set the fixture to various heights, as required.
- Slots at the top of the yoke allow fixture to be mounted to ceiling (fasteners by others).

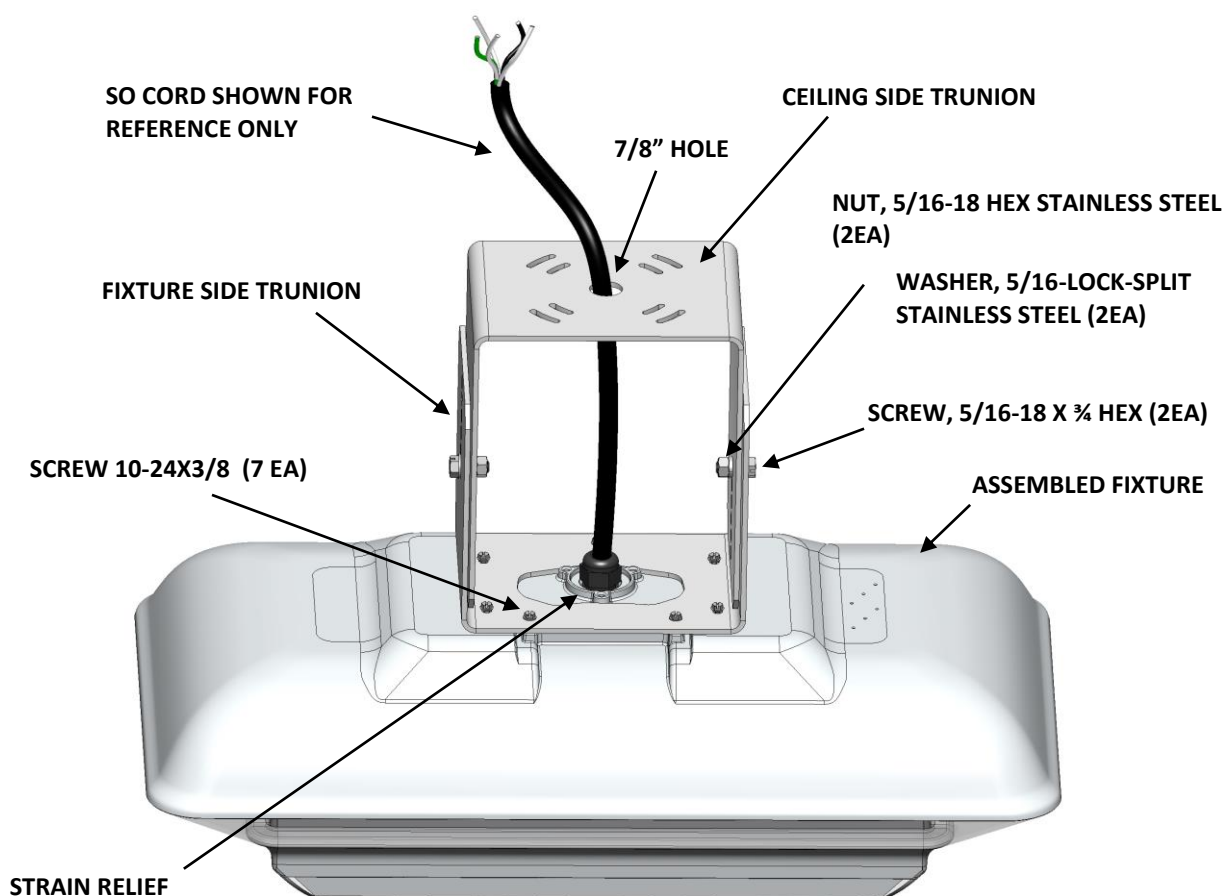

- The SO cord can then be routed to the junction box and connected

FOR FIXTURES EQUIPPED WITH OCCUPANCY SENSOR, THE SENSOR EXTENDS BEYOND THE BOTTOM OF THE LUMINAIRE BY 3/16 INCH. THE FIXTURE CARTON IS DESIGNED TO PROTECT THE SENSOR. DO NOT SET FIXTURE DIRECTLY ON A FLAT SURFACE TO AVOID CRUSHING THE OCCUPANCY SENSOR.