



Pacific TCW215

TCW215 2xTL-D36W HFS PI

PACIFIC, 2, MASTER TL-D, 36 W, HF Performer, Push-in connector 3-pole

Functional dust-, and jetproof luminaire for TL-D fluorescent lamps. Fibre-glass reinforced polyester housing with an acrylic pearled cover. Fixing of the cover to the housing without additional lockers, but by innovative concept with integrated fixing points. Gear tray, 2 stainless steel ceiling fixing clips and cable entries (membranes) supplied with the luminaire. Choice of different standard versions available:.. versions 1/2 x 18W, 1/2 x 36W, 1/2 x 58W (TL-D),.. ready-to-install, including lamp(s) and Waterproof External Connector (WEC),.. equipped with through-wiring 5 x 2.5 mm².

Product data


General Information		Connection	
Lamp family code	TL-D [MASTER TL-D]	Push-in connector 3-pole	
Gear	HFP [HF Performer]	Cable	
Feed-through wiring	-	-	
Product family code	TCW215 [PACIFIC]	Temperature	
CE mark	Yes	Ambient temperature range	
Flammability mark	For mounting on normally flammable surfaces	-15 to +35 °C	
ENEC mark	ENEC mark	Mechanical and Housing	
Glow-wire test	Temperature 650 °C, duration 5 s	Housing Material	
Light Technical		Polyester	
Number of light sources	2	Fixation point length distance (Nom)	
Operating and Electrical		600 mm	
Input Voltage	220 to 240 V	Overall length	
Power Consumption	36 W	1,300 mm	
		Approval and Application	
		Ingress protection code	
		IP66 [Dust penetration-protected, jet-proof]	
		Mech. impact protection code	
		IK02 [0.2 J standard]	
		Protection class IEC	
		Safety class I	

Pacific TCW215

Application Conditions	
Suitable for random switching	Not applicable
Product Data	
Order product name	TCW215 2xTL-D36W HFS PI
Full product name	TCW215 2xTL-D36W HFS PI
Full product code	871155929174100
Order code	29174100

Material Nr. (12NC)	910402602118
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711559291741
Numerator - Packs per outer box	1
EAN/UPC - Case	8711559291741

Dimensional drawing

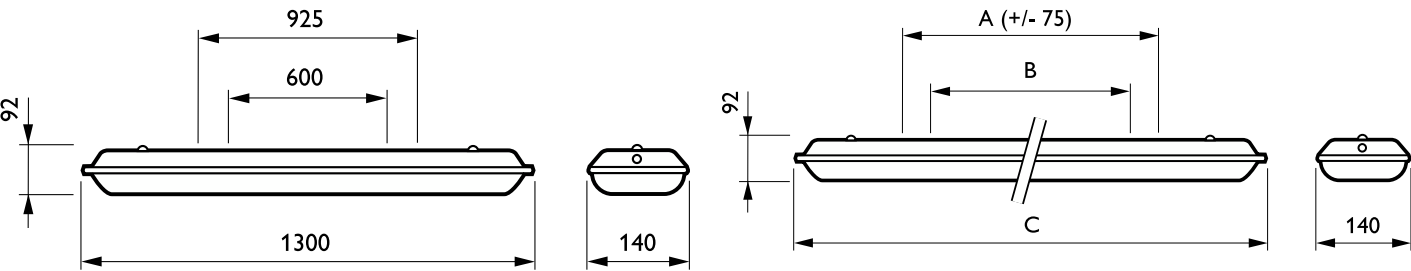

Product	A	B	C
TCW215 2xTL-D36W HFS PI	850 mm	600 mm	1,300 mm

