



# **Pacific TCW216**

## TCW216 2xTL-D36W HFS EL1 PI

PACIFIC, 2, MASTER TL-D, 36 W, HF Performer, Emergency lighting 1 hour duration, Push-in connector 3-pole

Functional shock-, vandal-, dust-, and jetproof luminaire for TL-D and TL5 fluorescent lamps. Fibre-glass reinforced polyester housing with a polycarbonate prismatic clear cover. Fixation of the cover to the housing without additional lockers, but by innovative concept with integrated fixation points. Gear tray, 2 stainless steel ceiling fixation clips and cable entries (membranes) supplied with the luminaire. Choice of different standard versions available:. versions  $1/2 \times 18W$ ,  $1/2 \times 36W$ ,  $1/2 \times 58W$  (TL-D) and  $1/2 \times 49W$  (TL5),. emergency lighting, 1- or 3 hours,. ready-to-install, including lamp(s) and Waterproof External Connector (WEC),. equipped with through-wiring  $5 \times 2.5 \text{ mm}^2$ .

#### Product data

General Information		
Lamp family code	TL-D [MASTER TL-D]	
Light source replaceable	Yes	
Gear	HFP [HF Performer]	
Driver included	Yes	
Feed-through wiring	-	
Product family code	TCW216 [PACIFIC]	
Explosion hazard class	-	
CE mark	Yes	
Flammability mark	For mounting on normally flammable surfaces	
ENEC mark	ENEC mark	
Glow-wire test	Temperature 850 °C, duration 5 s	

Light Technical		
Number of light sources	2	
Optic type	-	
Operating and Electrical		
Input Voltage	220 to 240 V	
Power Consumption	36 W	
Connection	Push-in connector 3-pole	
Connection	Push-in connector 3-pole	
Controls and Dimming	Push-in connector 3-pole	
	Push-in connector 3-pole  No	
Controls and Dimming	·	
Controls and Dimming	·	
Controls and Dimming Dimmable	·	


Datasheet, 2023, April 29 data subject to change


# Pacific TCW216

Fixation point length distance (Nom)	600 mm	
Overall length	1,300 mm	
Approval and Application		
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]	
Mech. impact protection code	IK08 [5 J vandal-protected]	
Protection class IEC	Safety class I	
Application Conditions		
Suitable for random switching	Not applicable	
Product Data		
Order product name	TCW216 2xTL-D36W HFS EL1 PI	

Full product name	TCW216 2xTL-D36W HFS EL1 PI	
Full product code	871155929330100	
Order code	29330100	
Material Nr. (12NC)	910402615918	
Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	8711559293301	
Numerator - Packs per outer box	1	
EAN/UPC - Case	8711559293301	

## Dimensional drawing

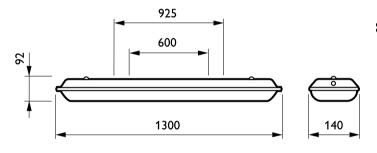

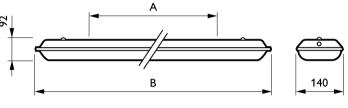

Product	Α	В
TCW216 2xTL-D36W HFS EL1 PI	925 mm	1,300 mm



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.