



# CoreLine Downlight

## DN130B LED20S/840 PSED-E IP44 II WH

CoreLine Downlight WH, LED Module, system flux 2000 lm, 840 neutral white, Power supply unit with DALI interface, DC-compatible, external, Safety class II, Wire-protected, splash-proof, White

The CoreLine Downlight range of recessed luminaires is designed to replace CFL-ni/CFL-i based downlight luminaires. Their attractive TCO helps customers to make the switch to LED. These luminaires create a natural lighting effect for use in general lighting applications. They also deliver instant energy savings and have a much longer lifetime, creating a real value-for-money and environmentally friendly solution. They are easy to install thanks to their standard cut-out size and push-in connectors.

### Product data

General Information		Lighting Technology	
Lamp family code	LED20S [LED Module, system flux 2000 lm]	Lighting Technology	LED
Light source replaceable	No	Value ladder	Performance
Number of gear units	Unit	CE mark	Yes
Driver included	Yes	Warranty period	5 years
Remarks	*- According to the Lighting Europe guidance paper 'Evaluating performance of LED based luminaires – January 2018': statistically there is no relevant difference in lumen maintenance between the B50 and, for example, the B10. Therefore, the median useful life (B50) value also represents the B10 value.	Flammability mark	For mounting on normally flammable surfaces
Product family code	DN130B [CoreLine Downlight WH]	ENEC mark	-
		Glow-wire test	Temperature 850 °C, duration 5 s
		EU RoHS compliant	Yes
		Light Technical	
		Luminous Flux	2,100 lm
		Correlated Colour Temperature	4000 K
		Luminous efficacy (rated) (nom.)	95 lm/W
		Colour rendering index (CRI)	80

# CoreLine Downlight

Beam angle of light source	120 degree(s)
Light source colour	840 neutral white
Optic type	Wide beam
Optical cover type	Acrylic bowl/cover frosted
Luminaire light beam spread	90°
Unified Glare Rating (CEN)	28

## Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Inrush current	20.4 A
Inrush time	195 ms
Power Consumption	22 W
Power Factor (Fraction)	0.95
Connection	Plug-in connector 3-pole Wago
Cable	-
Number of products on MCB of 16 A type B	24

## Temperature

Ambient temperature range	-10 to +40 °C
---------------------------	---------------

## Controls and Dimming

Dimmable	Yes
Driver/power unit/transformer	Power supply unit with DALI interface, DC-compatible, external
Control interface	DALI
Constant light output	No

## Mechanical and Housing

Housing material	Polycarbonate
Reflector material	Polycarbonate
Optic material	Aluminium
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Housing Colour	White
Optical cover/lens finish	Frosted

Overall height	109 mm
Overall diameter	216 mm

## Approval and Application

Ingress protection code	IP44 [Wire-protected, splash-proof]
Mech. impact protection code	IK02 [0.2 J standard]
Protection class IEC	Safety class II

## Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.38, 0.37) SDCM <5
Power consumption tolerance	+/-10%

## Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50,000 h	5 %
Lumen maintenance at median useful life* 50,000 h	L70


## Application Conditions

Performance ambient temperature Tq	25 °C
Maximum dim level	1%
Suitable for random switching	Yes

## Product Data

Order product name	DN130B LED20S/840 PSED-E IP44 II WH
Full product name	DN130B LED20S/840 PSED-E IP44 II WH
Full EOC	871869687888000
Order code	87888000
Material no. (12 NC)	910500458085
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8718696878880
Numerator – packs per outer box	1
EAN/UPC - Case	8718696878880

## Dimensional drawing

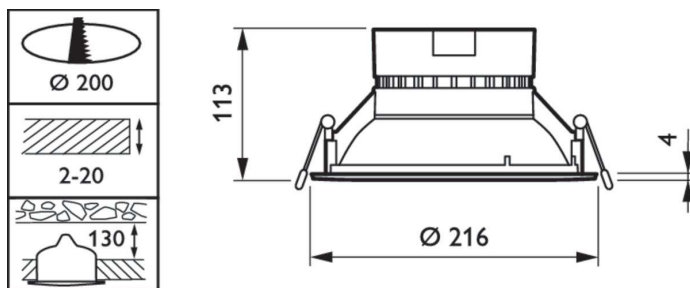

## CoreLine Downlight

