



# CoreLine Downlight

## DN131B LED20S/830 IA1 ALU

CoreLine Downlight, 22 W, D200 mm, 2000 lm, 3000 K, Wireless, Frosted, IP20

CoreLine Downlight delivers on the CoreLine promise of innovative, easy to use and high-quality recessed downlights. The CoreLine Downlight range is suitable for one-to-one conventional luminaire replacements, with an attractive TCO that helps customers to make the switch to LED. These recessed downlights create uniform light distribution for use in general lighting applications. They also deliver instant energy savings and have a much longer lifetime, creating a real value-for-money and environmentally-friendly solution. CoreLine DN140B recessed downlights are easy to install thanks to their standard cut-out size and push-in connectors. An InterAct Ready option with integrated wireless communications is available in this family, which can be used with InterAct gateways, sensors and software.

### Product data

General Information			
Light source replaceable	No	Embedded control	Interact SNS210 sensor
Number of gear units	1 unit	CE mark	Yes
Driver included	Yes	Warranty period	5 years
Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.	Flammability mark	For mounting on normally flammable surfaces
Product family code	DN131B [CoreLine Downlight ALU]	ENEC mark	ENEC mark
Lighting Technology	LED	Glow-wire test	Temperature 850 °C, duration 5 s
Value ladder	Performance	EU RoHS compliant	Yes
		Light Technical	
		Luminous Flux	2,000 lm
		Correlated Color Temperature (Nom)	3000 K
		Luminous Efficacy (rated) (Nom)	90 lm/W

## CoreLine Downlight

Color rendering index (CRI)	80
Beam angle of light source	120 degree(s)
Light source color	830 warm white
Optic type	High-gloss mirror
Luminaire light beam spread	70°
Unified glare rating CEN	25

### Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Inrush current	16 A
Inrush time	0.32 ms
Power Consumption	22 W
Power Factor (Fraction)	0.9
Connection	Push-in connector 2-pole
Cable	-
Number of products on MCB of 16 A type B 24	

### Temperature

Ambient temperature range	-10 to +40 °C
---------------------------	---------------

### Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit regulating external
Control interface	Wireless
Constant light output	No

### Mechanical and Housing

Housing Material	Polycarbonate
Reflector material	Polycarbonate
Optic material	Aluminum
Optical cover material	Polycarbonate
Fixation material	Steel
Housing Color	Aluminum
Optical cover finish	Frosted

Overall height	109 mm
Overall diameter	216 mm

### Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Protection class IEC	Safety class II

### Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.43, 0.40) SDCM <5
Power consumption tolerance	+/-10%

### Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L70


### Application Conditions

Performance ambient temperature Tq	25 °C
Suitable for random switching	Yes

### Product Data

Order product name	DN131B LED20S/830 IA1 ALU
Full product name	DN131B LED20S/830 IA1 ALU
Full product code	871869939711100
Order code	910500465264
Material Nr. (12NC)	910500465264
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699397111
Numerator - Packs per outer box	1
EAN/UPC - Case	8718699397111

## Dimensional drawing

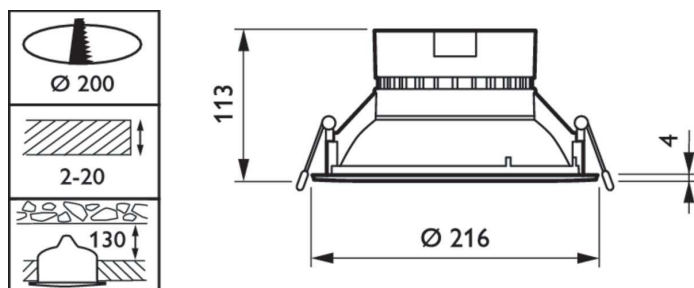

## CoreLine Downlight

