

# SmartForm TBS411

## TBS411 1x54W/840 HFP C8-VH PIP

SmartForm recessed semi-modular, 1, 54 W, HF Performer,  
High-gloss optic 3D micro-lamellae very high reflectance

Reflecting Philips' drive for simplicity and sustainability, SmartForm recessed is a complete family of highly versatile modular and semi-modular luminaires. These luminaires are available with a choice of LED or MASTER TL5 light sources in very small, slender versions. Designed to fit in a wide range of ceiling types, this complete family can fulfill the majority of project requirements in most applications. Energy efficiency. As well as incorporating energy-efficient LED or TL5 light sources and a range of Philips electronic ballasts, the SmartForm recessed family can be equipped with lighting controls for presence detection and daylight regulation (ActiLume) or daylight regulation only (Luxsense) in order to reduce energy consumption (W/m<sup>2</sup> is very low). In this way, this Green Flagship range also reduces the overall cost of ownership as well as CO<sub>2</sub> levels, making SmartForm an environmentally friendly choice. SmartForm recessed TBS411 – 'light beam' semi-modular – 600 mm module. These slender SmartForm recessed luminaires are designed for integration in variety of linear ceiling systems: exposed and concealed T-bar, plaster and the extended versions for bandrastrer ceilings. 'Light beam' TBS411 1-lamp. Micro-optics and covers (MLO-PC and Opal) in smallest concept, width 90 mm. Modular length 600, 900, 1200 and 1500 mm. To extend till 2400 mm. 'Light beam' TBS411 1-lamp with AIR. Micro-optics and covers in smallest concept with AIR function, width 100 mm. Modular length 600, 900, 1200 and 1500 mm. To extend till 2400 mm. 'Light beam' TBS411 2-lamps. Mini-optics, 2-lamps, width 115 mm. Modular length 600, 900, 1200 and 1500 mm. To extend till 2400 mm.

### Product data


General Information			
Lamp family code	TL5 [TL5]	Feed-through wiring	-
Gear	HFP [HF Performer]	Product family code	TBS411 [SmartForm recessed semi-modular]
		Embedded control	-

## SmartForm TBS411

CE mark	Yes
Glow-wire test	Temperature 850 °C, duration 5 s
<b>Light Technical</b>	
Number of light sources	1
Light source color	840 neutral white
Optic type	High-gloss optic 3D micro-lamellae very high reflectance
Optical cover type	-
<b>Operating and Electrical</b>	
Input Voltage	220 to 240 V
Power Consumption	54 W
Connection	Push-in connector and pull relief
Cable	-
<b>Mechanical and Housing</b>	
Housing Color	White
Overall length	1,197 mm

<b>Approval and Application</b>	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK07 [2 J reinforced]
Protection class IEC	Safety class I
<b>Application Conditions</b>	
Suitable for random switching	Not applicable
<b>Product Data</b>	
Order product name	TBS411 1x54W/840 HFP C8-VH PIP
Full product name	TBS411 1x54W/840 HFP C8-VH PIP
Full product code	871794398661300
Order code	910501887303
Material Nr. (12NC)	910501887303
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8717943986613
Numerator - Packs per outer box	1
EAN/UPC - Case	8717943986613

### Dimensional drawing

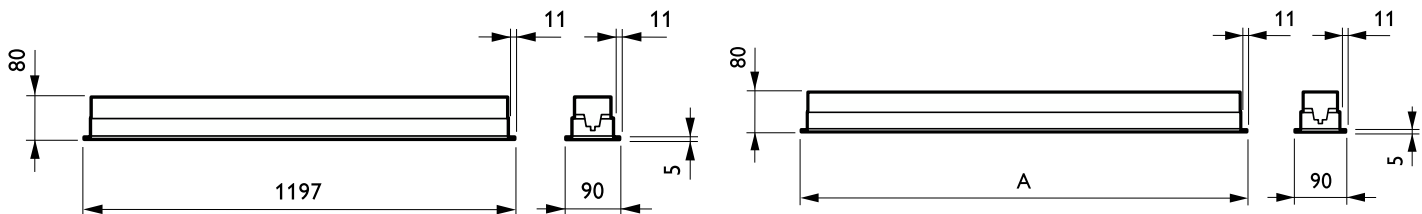

Product	A
TBS411 1x54W/840 HFP C8-VH PIP	1,197 mm

