



# eW Fuse Powercore

## LS515X LED5/3000 100-277V MB WH

eW Fuse Powercore, 3000 K, 30° x 60° beam angle, 12.5 W/ft, 305 mm (1 ft)

With narrow and medium beams of intense white or solid blue light, eW Fuse Powercore is an excellent choice for a full range of surface grazing and wall-washing applications. Its ultra-compact form factor permits installation in tight spaces too small to accommodate conventional grazing fixtures with similar light output. eW Fuse Powercore meets or exceeds the performance of comparable linear fluorescent grazing fixtures while lowering installation, energy, and maintenance costs. It offers environmentally-conscious buyers a green, energy-efficient grazing fixture with industry-leading quality and quantity of light. Integrated Powercore technology ensures rapid, efficient and accurate control of power output to the fixture directly from line voltage, eliminating the need for external power supplies. Use of standard wiring dramatically simplifies installation and helps lower total system cost.

### Product data

General Information		Operating and Electrical	
Lamp family code	LED5 [ LED Module 500 lm]	Input Voltage	100 to 277 V
Light source colour	830 warm white	Input frequency	50 to 60 Hz
Light source replaceable	No	Controls and Dimming	
Driver included	Yes	Dimmable	Yes
Optic type	MB [ Medium beam]	Mechanical and Housing	
Luminaire light beam spread	30° x 60°	Housing material	Aluminum
Protection class IEC	Safety class I (I)	Length	305 mm
Glow-wire test	850/5 [ Temperature 850 °C, duration 5 s]	Colour	White
Type description	No		
CE mark	CE mark		

## eW Fuse Powercore

### Approval and Application

Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK02 [ 0.2 J standard]

### Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	500 lm
Init. Corr. Colour Temperature	3000 K
Init. Colour rendering index	83
Initial input power	13.5 W

### Application Conditions


Ambient temperature range	-40 to +50 °C
Maximum dimming level	10% (depends on dimmer, ELV)
Suitable for random switching	Yes

### Product Data

Full product code	871829137622499
Order product name	LS515X LED5/3000 100-277V MB WH
EAN/UPC – product	8718291376224
Order code	523-000065-13
SAP numerator – quantity per pack	1
Numerator – packs per outer box	20
SAP material	910503701722
SAP net weight (piece)	0.435 kg
Commercial Code	523-000065-13
Catalogue number description	eW Fuse Powercore, 3000 K, 30° x 60° beam angle, 12.5 W/ft, 305 mm (1 ft)



### Dimensional drawing

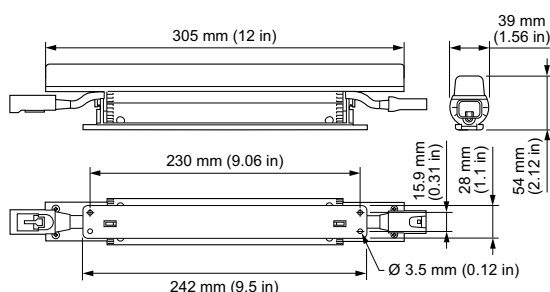

LS515X LED5/3000 100-277V MB WH

