



eW Graze QLX Powercore

eW Graze QLX Powercore, 4000 K, 15° x 30° Beam Angle, 1219 mm (4 ft)

eW Graze QLX Powercore, 4000 K, 15° x 30° Beam Angle, 1219 mm (4 ft)

Many architectural structures need a linear fixture capable of illuminating several storeys with minimal setback and reduced power consumption. Property owners/end users need a controllable product capable of dynamic illumination to draw attention to their establishments and emphasise their brands. Graze QLX Powercore is capable of illuminating over 10 metres at very close setback distances. Powercore technology enables simple installation and long product run lengths.

Product data

General information		Operating and electrical	
Lamp family code	LED-HB [LED High Brightness]	Input Voltage	100 to 277 V
Lamp colour code	Neutral white	Input frequency	50 to 60 Hz
Light source replaceable	No	Controls and dimming	
Driver included	Yes	Dimmable	Yes
Optical cover/lens type	PCC [Polycarbonate bowl/cover clear]	Mechanical and housing	
Luminaire light beam spread	15° x 30°	Housing material	Aluminum extruded
Protection class IEC	Safety class I (I)	Optical cover/lens material	Polycarbonate
CE mark	CE mark	Length	1219 mm
UL mark	UL and cUL mark	Colour	Aluminium
Lifetime to 70% luminous flux	100000 h		

eW Graze QLX Powercore

Approval and application	
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK10 [20 J vandal-resistant]
Vibration standard	Not compliant to ANSI C136.31, 3G. Special orders are available to conform to the standard. Please contact your Color Kinetics Lighting Sales rep for custom configurations.
FCC mark	FCC Class A
Vibration rating	Not compliant to ANSI C136.31, 3G. Special orders are available to conform to the standard. Please contact your Color Kinetics Lighting Sales rep for custom configurations.

Initial performance (IEC compliant)	
Lamp colour temperature	4000 K
Initial input power	60 W

Over time performance (IEC compliant)	
Lumen Maintenance 50% at 25 °C	60000
Reported	
Lumen Maintenance 50% at 50 °C	60000
Reported	
Lumen Maintenance 70% at 25 °C	60000
Reported	


Lumen Maintenance 70% at 50 °C	60000
Reported	

Application conditions	
Ambient temperature range	-40 to +50 °C

Product data	
Full product code	871829161155400
Order product name	BCS427 15x30/4000 L1219
EAN/UPC – product	8718291611554
Order code	523-000081-52
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	910503703799
Net Weight (Piece)	4.700 kg
Commercial Code	523-000081-52
Commercial Code	eW Graze QLX Powercore, 4000 K, 15° x 30° Beam Angle, 1219 mm (4 ft)



Dimensional drawing

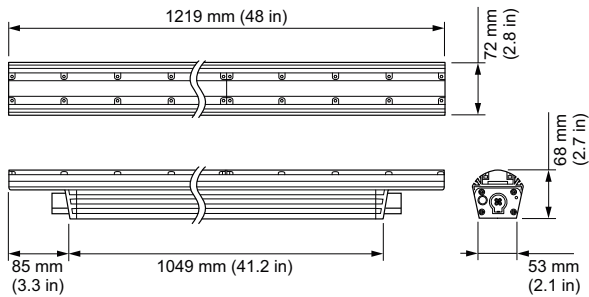

BCS427 15x30/4000 L1219

