



eColor Reach Powercore gen2

DCP775 GN 100-240V

Green - 100 to 240 V - 5°

eColor Reach Powercore gen2 high-performance LED luminaires are premium exterior long-throw dynamic high-quality solid color luminaires for lighting tall buildings, bridges, and iconic structures. A full range of accessories allow for customizable beam angles for floodlighting, spotlighting, wall washing, and grazing, along with the efficiency and cost-effectiveness of Powercore technology in a rugged die-cast aluminium housing.

Product data

General Information	
Lamp family code	LED-HB [LED High Brightness]
Light source color	Green
Light source replaceable	No
Driver included	Yes
Luminaire light beam spread	5°
Protection class IEC	Safety class I
Type description	-
CE mark	CE mark
UL mark	UL mark
Lifetime to 70% luminous flux	70000 h
Operating and Electrical	
Input Voltage	100 to 240 V
Input Frequency	50 to 60 Hz

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Housing Material	Aluminum
Optic material	Glass
Approval and Application	
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Initial Performance (IEC Compliant)	
Initial luminous flux (system flux)	8937 lm
Initial LED luminaire efficacy	30.8 lm/W
Initial input power	250 W

eColor Reach Powercore gen2

Application Conditions


Ambient temperature range -40 to +50 °C

Product Data

Full product code 871829138437300
Order product name DCP775 GN 100-240V
EAN/UPC - Product 8718291384373
Order code 910503703941

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910503703941
Net Weight (Piece)	34.000 kg

Dimensional drawing

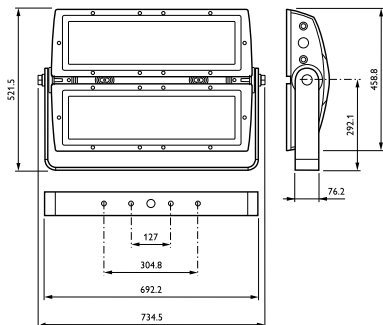

Reach

