



CoreLine Batten

BN124C LED64S/840 PSU TW1 L1500

LED Module, system flux 6400 lm - 840 neutral white - Power supply unit

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Batten range of LED products can be used to replace traditional battens with fluorescent lamps. The process of selecting, installing and maintaining is so easy – it's a simple switch.

Product data

General Information		Remarks	* -Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value.
Lamp family code	LED64S [LED Module, system flux 6400 lm]	Constant light output	No
Light source color	840 neutral white	Number of products on MCB of 16 A type B	24
Light source replaceable	No	RoHS mark	RoHS mark
Number of gear units	1 unit	Operating and Electrical	
Driver/power unit/transformer	Power supply unit	Input Voltage	220-240 V
Driver included	Yes	Input Frequency	50 to 60 Hz
Optic type	-	End CLO power consumption	- W
Luminaire light beam spread	120°	Inrush current	0.37 A
Connection	Push-in connector 3-pole	Inrush time	0.06 ms
Cable	-		
Protection class IEC	Safety class I		
Glow-wire test	Temperature 850 °C, duration 30 s		
Flammability mark	For mounting on easy flammable surfaces		
CE mark	CE mark		
ENEC mark	-		
Warranty period	5 years		

CoreLine Batten


Power Factor (Min)	0.9
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Housing Material	Metal
Reflector material	-
Optic material	-
Optical cover/lens material	Polycarbonate
Fixation material	Stainless steel
Optical cover/lens finish	Frosted
Overall length	1410 mm
Overall width	64 mm
Overall height	82 mm
Color	White
Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Initial Performance (IEC Compliant)	
Initial luminous flux (system flux)	6400 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	107 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>80

Initial chromaticity	(0.38, 0.38) SDCM <5
Initial input power	60 W
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L70
Application Conditions	
Ambient temperature range	0 to +35 °C
Performance ambient temperature Tq	25 °C
Suitable for random switching	Yes
Product Data	
Full product code	871869938001499
Order product name	BN124C LED64S/840 PSU TW1 L1500
EAN/UPC - Product	8718699380014
Order code	910503910281
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	910503910281
Net Weight (Piece)	1.970 kg

Warnings and Safety

- The product is IPX0 & as such is not protected against water ingress & as such we strongly recommend that the environment in which the luminaire is to be installed is suitably checked
- If the above advice is not taken and the luminaires are subject to water ingress, Philips / Signify cannot guarantee safe failure & product warranty will become void

Dimensional drawing

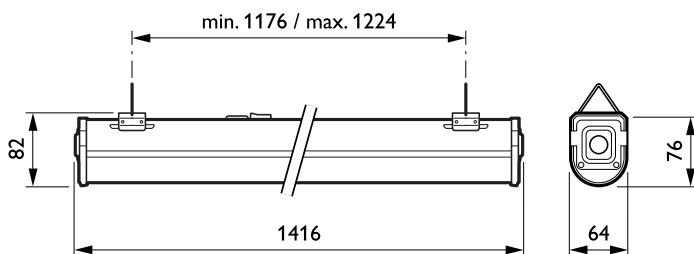

CoreLine Batten BN120C-BN124C

