



Maxos LED Performer

4MX900 581 LED40S/830 PSU MB WH

Maxos LED Performer, LED module, system flux 4000 lm, 830 warm white, Power supply unit (On/Off), Medium beam, White

Customers want to save energy and reduce cost compared to what they are used to with conventional lighting. At the same time, excellent lighting conditions are needed: in industrial environments, to guarantee safety and productivity; and in retail environments, to make the merchandise stand out and attract shoppers. Maxos LED Performer is an extremely flexible solution that delivers low energy consumption and excellent beam shaping at an attractive investment level.

Product data



General Information		Warranty period	
Lamp family code	LED40S [LED module, system flux 4000 lm]	Flammability mark	-
Light source replaceable	No	ENEC mark	ENEC mark
Number of gear units	Unit	Glow-wire test	Temperature 650 °C, duration 30 s
Driver included	Yes	EU RoHS compliant	Yes
Remarks	*- According to the Lighting Europe guidance paper 'Evaluating performance of LED based luminaires – January 2018': statistically there is no relevant difference in lumen maintenance between the B50 and, for example, the B10. Therefore, the median useful life (B50) value also represents the B10 value.	Light Technical	
Product family code	4MX900 [Maxos LED Performer]	Luminous Flux	4,000 lm
Lighting Technology	LED	Saturated Red (R9)	<50
Value ladder	Performance	Correlated Colour Temperature	3000 K
CE mark	Yes	Luminous efficacy (rated) (nom.)	151 lm/W
		Colour rendering index (CRI)	≥80
		Beam angle of light source	120 degree(s)
		Light source colour	830 warm white
		Optic type	Medium beam
		Luminaire light beam spread	70°

Maxos LED Performer

Unified Glare Rating (CEN)	Not applicable
Operating and Electrical	
Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Inrush current	17.8 A
Inrush time	0.282 ms
Power Consumption	25.2 W
Power Factor (Fraction)	0.9
Connection	Connection unit 3-pole
Cable	-
Number of products on MCB of 16 A type B	24
Temperature	
Ambient temperature range	-20 to +40 °C
Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Control interface	-
Constant light output	No
Mechanical and Housing	
Housing material	Aluminium
Reflector material	-
Optic material	Polymethyl methacrylate
Optical cover/lens material	Polymethyl methacrylate
Fixation material	Steel
Housing Colour	White
Optical cover/lens finish	Clear
Overall length	1,530 mm
Overall width	87 mm
Overall height	82 mm
Dimensions (height x width x depth)	82 x 87 x 1530 mm
Approval and Application	
Ingress protection code	IP40 [Wire-protected]
Mech. impact protection code	IK02 [0.2 J standard]

Sustainability rating	-
Protection class IEC	Safety class I
Photobiological risk	Photobiological risk group 0 @200mm to EN62778
Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Initial chromaticity	(0.43, 0.40) SDCM <3.5
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life 50,000 h	5 %
Control gear failure rate at median useful life 100,000 h	10 %
Lumen maintenance at median useful life* 50,000 h	L80
Lumen maintenance at median useful life* 100,000 h	L80
Application Conditions	
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Suitable for random switching	Not applicable
Product Data	
Order product name	4MX900 581 LED40S/830 PSU MB WH
Full product name	4MX900 581 LED40S/830 PSU MB WH
Full EOC	403073266481899
Order code	66481899
Material no. (12 NC)	910629140926
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	4030732664818
Numerator – packs per outer box	2
EAN/UPC - Case	4030732262632

Dimensional drawing

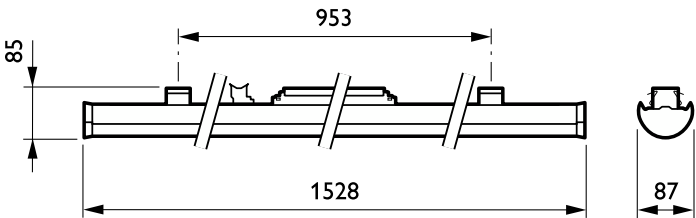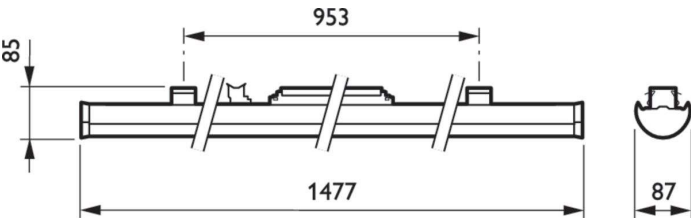

Maxos LED Performer

