



CoreLine Trunking

LL120X LED90S/840 2x PSU NB 5 WH

CoreLine Trunking, LED module, system flux 9000 lm, Power supply unit (On/Off), Narrow beam

Whether for a new facility or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Trunking range of LED products can be used to replace general lighting. The process of selecting, installing and maintaining is so easy – it's a simple switch.

Product data

| General Information | | | |
|--------------------------|--|----------------------------------|---|
| Lamp family code | LED90S [LED module, system flux 9000 lm] | Flammability mark | For mounting on normally flammable surfaces |
| Light source replaceable | No | ENEC mark | ENEC mark |
| Number of gear units | 2 units | Glow-wire test | Temperature 650 °C, duration 5 s |
| Driver included | Yes | EU RoHS compliant | Yes |
| Feed-through wiring | Feed-through wiring 5-phase | Light Technical | |
| Remarks | *- According to the Lighting Europe guidance paper 'Evaluating performance of LED based luminaires – January 2018': statistically there is no relevant difference in lumen maintenance between the B50 and, for example, the B10. Therefore, the median useful life (B50) value also represents the B10 value. | Luminous Flux | 9,000 lm |
| Product family code | LL120X [CoreLine Trunking] | Correlated Colour Temperature | 4000 K |
| Lighting Technology | LED | Luminous efficacy (rated) (nom.) | 141 lm/W |
| CE mark | Yes | Colour rendering index (CRI) | ≥80 |
| Warranty period | 3 years + 2 years upon registration | Beam angle of light source | 120 degree(s) |
| | | Light source colour | 840 neutral white |
| | | Optic type | Narrow beam |
| | | Optical cover type | - |
| | | Luminaire light beam spread | 20° x 68° |
| | | Unified Glare Rating (CEN) | Not applicable |

CoreLine Trunking

| | |
|--|------------------------|
| Operating and Electrical | |
| Input Voltage | 220 to 240 V |
| Line Frequency | 50 to 60 Hz |
| Inrush current | 38 A |
| Inrush time | 0.28 ms |
| Power Consumption | 64 W |
| Power Factor (Fraction) | 0.95 |
| Connection | Connection unit 5-pole |
| Cable | - |
| Number of products on MCB of 16 A type B | 12 |

| | |
|---------------------------|---------------|
| Temperature | |
| Ambient temperature range | -20 to +35 °C |

| | |
|-------------------------------|----------------------------|
| Controls and Dimming | |
| Dimmable | No |
| Driver/power unit/transformer | Power supply unit (On/Off) |
| Constant light output | No |

| | |
|-------------------------------------|-------------------|
| Mechanical and Housing | |
| Housing material | Steel |
| Reflector material | - |
| Optic material | Acrylate |
| Optical cover/lens material | Acrylate |
| Fixation material | Steel |
| Housing Colour | White |
| Optical cover/lens finish | Clear |
| Overall length | 3,450 mm |
| Overall width | 95 mm |
| Overall height | 52 mm |
| Dimensions (height x width x depth) | 52 x 95 x 3450 mm |

| | |
|------------------------------|-------------------------|
| Approval and Application | |
| Ingress protection code | IP20 [Finger-protected] |
| Mech. impact protection code | IK02 [0.2 J standard] |
| Protection class IEC | Safety class I |


| | |
|-------------------------------------|----------------------|
| Initial Performance (IEC Compliant) | |
| Luminous flux tolerance | +/-7% |
| Initial chromaticity | (0.38, 0.38) SDCM <3 |
| Power consumption tolerance | +/-11% |

| | |
|--|-----|
| Over Time Performance (IEC Compliant) | |
| Control gear failure rate at median useful life 50,000 h | 5 % |
| Lumen maintenance at median useful life* 50,000 h | L80 |

| | |
|------------------------------------|-------|
| Application Conditions | |
| Performance ambient temperature Tq | 25 °C |
| Suitable for random switching | No |

| | |
|-----------------------------------|----------------------------------|
| Product Data | |
| Order product name | LL120X LED90S/840 2x PSU NB 5 WH |
| Full product name | LL120X LED90S/840 2x PSU NB 5 WH |
| Full EOC | 871829188166700 |
| Order code | 88166700 |
| Material no. (12 NC) | 910925682908 |
| SAP numerator – quantity per pack | 1 |
| EAN/UPC — Product/Case | 8718291881667 |
| Numerator – packs per outer box | 1 |
| EAN/UPC - Case | 8718291881667 |

Dimensional drawing

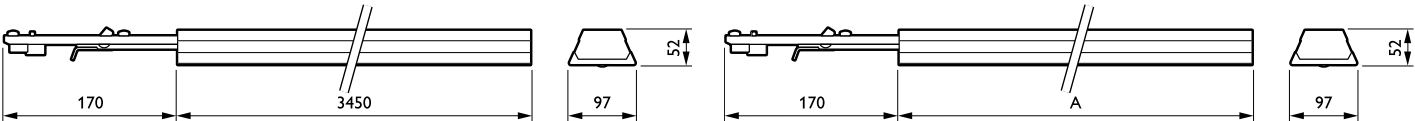

| |
|----------------------------------|
| Product |
| LL120X LED90S/840 2x PSU NB 5 WH |

