



# CoreLine Trunking

## LL120X LED90S/840 1x PSU DA20 5 WH

CoreLine Trunking - 6 pcs - LED module, system flux 9000 lm -  
 Power supply unit - Double asymmetric optic 20° - - - 5  
 conductors - - - Feed-through wiring 5-phase - Ceiling-  
 mounting bracket - White - - - -

Whether for a new facility or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Trunking range of LED products can be used to replace general lighting. The process of selecting, installing and maintaining is so easy – it's a simple switch.

### Product data

| General Information           |   |                        |  |
|-------------------------------|---|------------------------|--|
| Number of light sources       | 6 pcs                                     | Cable                  | -  |
| Lamp family code              | LED90S [ LED module, system flux 9000 lm] | Protection class IEC   | Safety class I   |
| Beam angle of light source    | 120 °                                     | Mounting               | Ceiling-mounting bracket   |
| Light source color            | 840 neutral white                         | Ready-to-install       | -  |
| Light source replaceable      | No  | Glow-wire test         | Temperature 650 °C, duration 5 s   |
| Number of gear units          | 1 unit                                    | Flammability mark      | For mounting on normally flammable surfaces  |
| Driver/power unit/transformer | Power supply unit                         | Accessories included   | Mounting bracket for suspension wire   |
| Driver included               | Yes                                       | CE mark                | CE mark  |
| Optic type                    | Double asymmetric optic 20°               | ENEC mark              | ENEC mark  |
| Optical cover/lens type       | -   | Warranty period        | 3 years + 2 years upon registration  |
| Luminaire light beam spread   | 86° x 80°                                 | Mechanical accessories | -  |
| Emergency lighting            | -   | Remarks                | *-Per Lighting Europe guidance paper<br>"Evaluating performance of LED based<br>luminaires - January 2018": statistically there<br>is no relevant difference in lumen<br>maintenance between B50 and for example |
| Internal wiring               | Standard                                  |                        |  |
| Feed-through wiring           | Feed-through wiring 5-phase               |                        |  |
| Connection                    | Connection unit 5-pole                    |                        |  |

## CoreLine Trunking

|  |  |
|--|--|
|  | B10. Therefore the median useful life (B50) value also represents the B10 value. |
| Constant light output                    | No   |
| Number of products on MCB of 16 A type B | 24   |
| RoHS mark                                | RoHS mark  |
| Product family code                      | LL120X [ CoreLine Trunking]  |
| Unified glare rating CEN                 | Not applicable   |
| <b>Light Technical</b>                   |  |
| Light Distribution                       | Direct lighting  |
| <b>Operating and Electrical</b>          |  |
| Input Voltage                            | 220 to 240 V   |
| Input Frequency                          | 50 to 60 Hz  |
| Control signal voltage                   | 0-16 V DC DALI   |
| Circuit                                  | -  |
| Circuit option                           | 5 conductors   |
| Inrush current                           | 19 A   |
| Inrush time                              | 0.28 ms  |
| Power Factor (Min)                       | 0.95   |
| <b>Controls and Dimming</b>              |  |
| Dimmable                                 | No   |
| <b>Mechanical and Housing</b>            |  |
| Housing Material                         | Steel  |
| Reflector material                       | -  |
| Optic material                           | Acrylate   |
| Optical cover/lens material              | Acrylate   |
| Fixation material                        | Steel  |
| Optical cover/lens finish                | Clear  |
| Overall length                           | 3450 mm  |
| Overall width                            | 95 mm  |
| Overall height                           | 52 mm  |
| Height                                   | 52 mm  |
| Diameter                                 | -  |
| Color                                    | White  |


|                                 |                          |
|---------------------------------|--------------------------|
| <b>Approval and Application</b> |                          |
| Ingress protection code         | IP20 [ Finger-protected] |
| Mech. impact protection code    | IK02 [ 0.2 J standard]   |

|  |                      |
|--|----------------------|
| <b>Initial Performance (IEC Compliant)</b> |                      |
| Initial luminous flux (system flux)        | 9000 lm              |
| Luminous flux tolerance                    | +/-7%                |
| Initial LED luminaire efficacy             | 141 lm/W             |
| Init. Corr. Color Temperature              | 4000 K               |
| Init. Color Rendering Index                | ≥80                  |
| Initial chromaticity                       | (0.38, 0.38) SDCM <3 |
| Initial input power                        | 64 W                 |
| Power consumption tolerance                | +/-11%               |

|   |     |
|---|-----|
| <b>Over Time Performance (IEC Compliant)</b>            |     |
| Control gear failure rate at median useful life 50000 h | 5 % |
| Lumen maintenance at median useful life* 50000 h        | L80 |


|                                    |               |
|------------------------------------|---------------|
| <b>Application Conditions</b>      |               |
| Ambient temperature range          | -20 to +35 °C |
| Performance ambient temperature Tq | 25 °C         |
| Suitable for random switching      | No            |

|                                 |                                    |
|---------------------------------|------------------------------------|
| <b>Product Data</b>             |                                    |
| Full product code               | 871869634737900                    |
| Order product name              | LL120X LED90S/840 1x PSU DA20 5 WH |
| EAN/UPC - Product               | 8718696347379                      |
| Order code                      | 910925863326                       |
| Numerator - Quantity Per Pack   | 1                                  |
| Numerator - Packs per outer box | 1                                  |
| Material Nr. (12NC)             | 910925863326                       |
| Net Weight (Piece)              | 6.910 kg                           |




## CoreLine Trunking

### Dimensional drawing

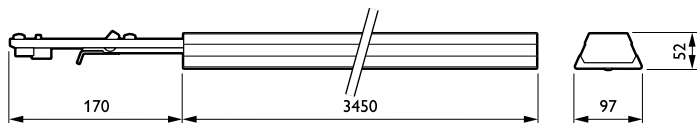


CoreLine electr. units LL120X-LL122X

### Photometric data



IFPC1\_LL120X1xLED90S840DA20



IFGU1\_LL120X1xLED90S840DA20

