



GentleSpace gen2

BY471P PRO250S/840 PSD VNB GC SMT-HD SI

GentleSpace 2 - LED ProfessionalLine, system flux 25000 lm - 840 neutral white - Power supply unit with DALI interface - Extra narrow beam - Clear glass - Silver - Xtreme (high operating temperature, long lifetime)

With the introduction of the GentleSpace LED luminaire in 2011, Philips achieved a breakthrough in high-bay lighting, offering a huge reduction in power consumption, a long service life and an innovative design. Now, with GentleSpace gen2, Philips continues to improve even further: an improved total cost of ownership, even in extreme conditions with the the GS-2 Xtreme version, which can be used up to +60 °C or 100,000 hrs of lifetime (L80), both ensured by an integrated over-heat protection. In addition, a wide variety of options – e.g. optics, coatings, mounting possibilities, cover materials and suitable for explosive zones 2/22 – are available to ensure an ideal solution for your application. Additionally, the GentleSpace gen2 can be equipped for use in a central emergency grid (PSED).

Product data

General Information			
Number of light sources	16 pcs	Driver included	Yes
Lamp family code	PRO250S [LED ProfessionalLine, system flux 25000 lm]	Optic type	Extra narrow beam
Beam angle of light source	114 °	Optical cover/lens type	Clear glass
Light source color	840 neutral white	Luminaire light beam spread	16°
Cap-Base	- [-]	Embedded control	-
Light source replaceable	Yes	Control interface	DALI
Number of gear units	2 units	Connection	External connector
Gear	EB [Electronic]	Cable	Cord with plug Wieland/Adels compatible 5-pole
Driver/power unit/transformer	Power supply unit with DALI interface	Protection class IEC	Safety class I
		Mounting	Suspension set twin, triangle heavy duty

GentleSpace gen2

Coating	-
Glowl-wire test	Temperature 650 °C, duration 5 s
Flammability mark	For mounting on easily flammable surfaces
Type description	Xtreme (high operating temperature, long lifetime)
CE mark	CE mark
ENEC mark	ENEC mark
Ball impact resistance mark	-
Design Award Winner mark	Design Award Winner 2014
Warranty period	5 years
Suspension accessories	-
Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value.
Constant light output	No
Number of products on MCB of 16 A type B	6
RoHS mark	RoHS mark
Product family code	BY471P [GentleSpace 2]
Unified glare rating CEN	19

Operating and Electrical

Input Voltage	220-240 V
Input Frequency	50 to 60 Hz
Control signal voltage	0-16 V DC DALI
Inrush current	9.6 A
Inrush time	2.3 ms
Power Factor (Min)	0.9

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Housing Material	Aluminum
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Glass
Fixation material	Stainless steel
Optical cover/lens finish	Clear
Overall length	600 mm
Overall width	450 mm
Overall height	150 mm

Color	Silver
-------	--------

Approval and Application

Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK07 [2 J reinforced]

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	25000 lm
Luminous flux tolerance	+/-7%
Initial LED luminaire efficacy	123 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	≥80
Initial chromaticity	(0.38, 0.38) SDCM <3
Initial input power	191 W
Power consumption tolerance	+/-11%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Control gear failure rate at median useful life 100000 h	10 %
Lumen maintenance at median useful life* 50000 h	L95
Lumen maintenance at median useful life* 100000 h	L85

Application Conditions


Ambient temperature range	-30 to +60 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	10%
Suitable for random switching	No

Product Data

Full product code	871869634834500
Order product name	BY471P PRO250S/840 PSD VNB GC SMT-HD SI
EAN/UPC - Product	8718696348345
Order code	910925863424
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910925863424
Net Weight (Piece)	15.600 kg



GentleSpace gen2

Dimensional drawing

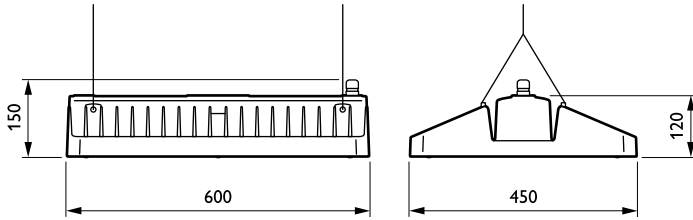

GentleSpace gen2 BY470P-BY473P

Photometric data

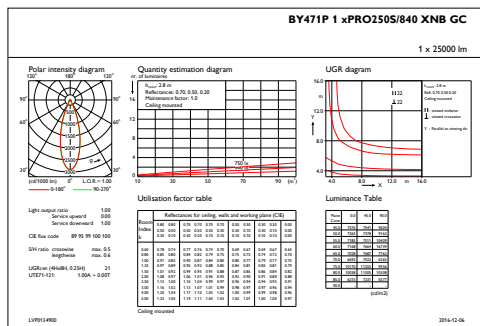

IFGU1_BY471P1xPRO250S840XNBGC

IFPC1_BY471P1xPRO250S840XNBGC

