



Mini 300 LED gen3

BBP333 LED128/740 I PRM

Mini 300 LED gen3 - LED module 12800 lm - 740 neutral white
 - Power supply unit - Safety class I - Petrol rotational symmetric medium - White

Philips Mini 300 LED gen3 luminaires, perfect product design and latest LED technology combination for highly efficient light outputs can turn your petrol station into a branded landmark and help visitors to approach safely in visual comfort. Mini 300 LED gen3, the state-of-the-art LED luminaires with light on demand intelligent motion sensing control system takes energy saving to new levels with dimming, but at the same time, ensuring sufficient lighting for orientation and safety. The light scenarios can be tailored to your preference at the first installation or during the lifespan of the products. The optional Master-Slave combination with a built-in presence and light sensor there's no need for an external sensor and one Master Mini 300 LED gen3 can control up to 6 basic luminaires. Not only will this have a positive impact on your investment, it can also lead to additional energy saving. Mini 300 LED gen3 luminaire is so light that it can be installed effortlessly by one person. Luminaire settings can even be changed from ground level using a smart phone or tablet as a remote control, eliminating the need to work at height. With the free Mini 300 LED App, even the status of the luminaire can be read while standing on the floor. The Mini 300 LED gen3 luminaires in recessed mounted, surface mounted and floodlight versions, which are suitable for undercanopy lighting, is a breakthrough, retrofit solution reduces installation costs.

Product data

General Information

Lamp family code	LED128 [LED module 12800 lm]
Light source color	740 neutral white
Light source replaceable	Yes

Number of gear units	1 unit
Driver/power unit/transformer	Power supply unit
Driver included	Yes
Optical cover/lens type	Polycarbonate bowl/cover flat

Mini 300 LED gen3

Luminaire light beam spread	113°
Control interface	Internal (no external connection)
Connection	Push-in connector 5-pole
Cable	Cable without plug 3-pole
Protection class IEC	Safety class I
Flammability mark	For mounting on normally flammable surfaces
CE mark	CE mark
ENEC mark	ENEC mark
Warranty period	5 years
Optic type outdoor	Petrol rotational symmetric medium
Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value. * At extreme ambient temperatures the luminaire might automatically dim down to protect components
Constant light output	No
Number of products on MCB of 16 A type B	8
RoHS mark	RoHS mark
Light source engine type	LED
Product family code	BBP333 [Mini 300 LED gen3]

Light Technical

Upward light output ratio	0
Standard tilt angle posttop	-
Standard tilt angle side entry	-

Operating and Electrical

Input Voltage	220 to 240 V
Input Frequency	50 to 60 Hz
Inrush current	53 A
Inrush time	0.3 ms
Power Factor (Min)	0.96

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Housing Material	Aluminum die cast
Reflector material	-
Optic material	Acrylate
Optical cover/lens material	Polycarbonate
Fixation material	-

Mounting device	-
Optical cover/lens shape	Flat
Optical cover/lens finish	Clear
Overall length	370 mm
Overall width	370 mm
Overall height	170 mm
Effective projected area	0.0584 m ²
Color	White

Approval and Application

Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Surge Protection (Common/Differential)	Philips standard surge protection level

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	11570 lm
Luminous flux tolerance	+/-7%
Initial LED luminaire efficacy	154 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	70
Initial chromaticity	(0.380, 0.380) SDCM <5
Initial input power	75 W
Power consumption tolerance	+/-11%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 100000 h	10 %
Lumen maintenance at median useful life* 100000 h	L99

Application Conditions

Ambient temperature range	-40 to +50 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	10%


Product Data

Full product code	871869699753600
Order product name	BBP333 LED128/740 I PRM
EAN/UPC - Product	8718696997536
Order code	910925865275
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910925865275
Net Weight (Piece)	3.630 kg





Mini 300 LED gen3

Dimensional drawing

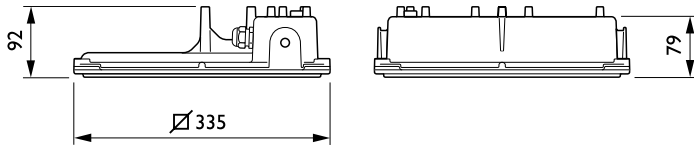

MINI 300 Stealth LED BBP/BCP333

Photometric data

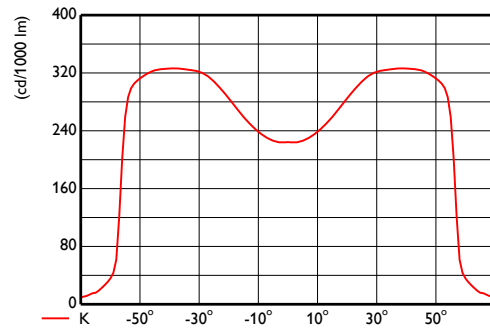

OFPC1_BBP3331xLED128740PRM

OFCS1_BBP3331xLED128740PRM

