



GentleSpace gen2

BY470P GRN130S/840 PSD-CLO WB GC SI

GentleSpace 2 - LED GreenLine system flux 13000 lm - 840 neutral white - Power supply unit with DALI interface and constant light output - Wide beam - Clear glass - Silver

With the introduction of the GentleSpace LED luminaire in 2011, Philips achieved a breakthrough in high-bay lighting, offering a huge reduction in power consumption, a long service life and an innovative design. Now, with GentleSpace gen2, Philips is setting a new standard in the market, with an improved total cost of ownership, even in extreme conditions. In addition, a high diversity of options are available to ensure an ideal solution for your application like optics, coatings and enabling the use of a central emergency grid (PSED).

Product data

General Information			
Number of light sources	8 [8 pcs]	Luminaire light beam spread	42° x 44°
Lamp family code	GRN130S [LED GreenLine system flux 13000 lm]	Embedded control	No [-]
Beam angle of light source	114°	Control interface	DALI
Light source colour	840 neutral white	Connection	CE [External connector]
Cap base	- [-]	Cable	Cord with plug Wieland/Adels compatible 5-pole
Light source replaceable	Yes	Protection class IEC	Safety class I (I)
Number of gear units	1 unit	Mounting	SMT [Suspension set twin, triangle]
Gear	EB [Electronic]	Coating	-
Driver/power unit/transformer	PSD-CLO [Power supply unit with DALI interface and constant light output]	Glow-wire test	850/5 [Temperature 850 °C, duration 5 s]
Driver included	Yes	Flammability mark	D [For mounting on easily flammable surfaces]
Optic type	WB [Wide beam]	CE mark	CE mark
Optical cover/lens type	GC [Clear glass]	ENEC mark	ENEC mark
		Ball impact resistance mark	-

GentleSpace gen2

Design award-winner marking	Design Award Winner 2014
Warranty period	5 years
Suspension accessories	No [-]
Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value.
Constant light output	Programmable
Number of products on MCB	12
EU RoHS compliant	Yes
Product Family Code	BY470P [GentleSpace 2]
Unified glare rating CEN	25

Operating and Electrical

Input voltage	220-240 V
Input frequency	50 to 60 Hz
Control signal voltage	0-16 V DC DALI
Initial CLO power consumption	70 W
Average CLO power consumption	78 W
Inrush current	4.8 A
Inrush time	2.3 ms
Power factor (min.)	0.9

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Housing material	Aluminum
Reflector material	-
Optic material	Acrylate
Optical cover/lens material	Glass
Gear tray material	Steel
Fixation material	Stainless steel
Optical cover/lens finish	Clear
Overall length	450 mm
Overall width	350 mm
Overall height	130 mm
Colour	Silver
Dimensions (height x width x depth)	130 x 350 x 450 mm (5.1 x 13.8 x 17.7 in)

Approval and Application

Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK07 [2 J reinforced]

Initial Performance (IEC Compliant)

Initial luminous flux	13000 lm
Luminous flux tolerance	+/-7%
Initial LED luminaire efficacy	149 lm/W
Init. Corr. Colour Temperature	4000 K
Init. colour rendering index	≥80
Initial chromaticity	(0.38, 0.38) SDCM <3
Initial input power	87 W
Power consumption tolerance	+/-11%

Over Time Performance (IEC Compliant)


Control gear failure rate at median useful life 50,000 h	5 %
Control gear failure rate at median useful life 100,000 h	10 %
Lumen maintenance at median useful life* 50,000 h	L85
Lumen maintenance at median useful life* 100,000 h	L70

Application Conditions

Ambient temperature range	-30 to +45 °C
Performance ambient temperature Tq	25 °C
Maximum dimming level	10%
Suitable for random switching	No


Product Data

Full product code	871869632256700
Order product name	BY470P GRN130S/840 PSD-CLO WB GC SI
EAN/UPC – product	8718696322567
Order code	32256700
Numerator – quantity per pack	1
Numerator – packs per outer box	1
Material no. (12NC)	910930206016
Net weight (piece)	9.300 kg





GentleSpace gen2

Dimensional drawing

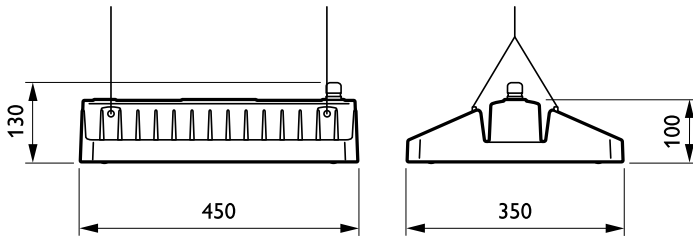

GentleSpace gen2 BY470P-BY473P

Photometric data

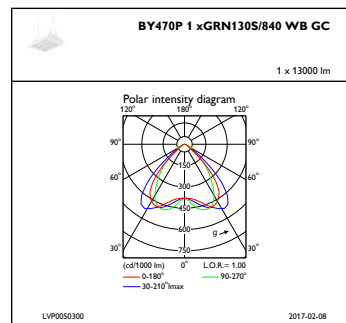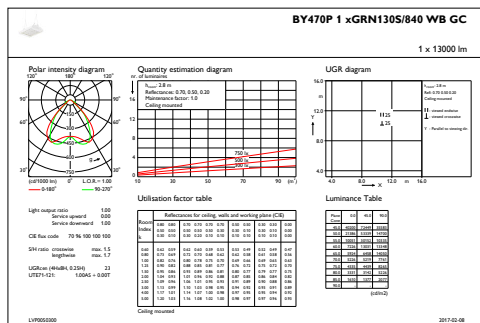

IFGU1_BY470P1xGRN130S840WBGC

IFPC1_BY470P1xGRN130S840WBGC

