



UNiStrip G2 RGB

BCP280 G2 36xLED-HP/RGB 24V L1190 WB

UNiStrip G2 is a LED lighting fixture designed for wide range architecture wall washer lighting applications. UNiStrip G2 offers reliable quality and outstanding performance

Product data

| General Information | |
|-------------------------------|--|
| Lamp colour code | Red, green and blue (RGB) |
| Light source replaceable | No |
| Number of gear units | 1 unit |
| Driver/power unit/transformer | ET [Electronic transformer] |
| Driver included | No |
| Optical cover/lens type | PC-S [Polycarbonate small] |
| Control interface | Dynamix DMX |
| Connection | Flying leads/wires |
| Cable | Cable 1.5 m without plug (C1K5) |
| Protection class IEC | Safety class III (III) |
| Flammability mark | F [For mounting on normally flammable surfaces] |
| CE mark | CE mark |
| ENEC mark | - |
| Warranty period | 3 years |
| Outdoor optic type | Wide beam angle 50° |
| Constant light output | No |
| RoHS mark | RoHS mark |
| LED engine type | LED |

| Light Technical | |
|--------------------------------|---|
| Standard tilt angle post-top | - |
| Standard tilt angle side entry | - |

| Controls and Dimming | |
|----------------------|-----|
| Dimmable | Yes |

| Mechanical and Housing | |
|-----------------------------|------------------------------------|
| Housing material | Aluminum extruded |
| Optic material | Polycarbonate |
| Optical cover/lens material | Polycarbonate |
| Fixation material | Aluminum |
| Mounting device | MBA [Mounting bracket adjustable] |
| Optical cover/lens shape | Flat |
| Optical cover/lens finish | Clear |
| Overall length | 1190 mm |
| Overall width | 63 mm |
| Overall height | 59 mm |
| Colour | Aluminum and black |


| Approval and Application | |
|------------------------------|---|
| Ingress protection code | IP66 [Dust penetration-protected, jet-proof] |
| Mech. impact protection code | IK06 [1 J] |

| Initial Performance (IEC Compliant) | |
|-------------------------------------|---------|
| Initial luminous flux | 2280 lm |
| Luminous flux tolerance | +/-10% |
| Initial LED luminaire efficacy | 45 lm/W |
| Lamp colour temperature | - K |


UNIstrip G2 RGB

| | |
|-------------------------------|---------------|
| Initial input power | 51 W |
| Power consumption tolerance | +/-15% |
| Application Conditions | |
| Ambient temperature range | -40 to +50 °C |
| Maximum dimming level | 0% (digital) |
| Product Data | |
| Full product code | 911401621403 |

| | |
|---------------------------------|--------------------------------------|
| Order product name | BCP280 G2 36xLED-HP/RGB 24V L1190 WB |
| Order code | 911401621403 |
| Numerator – quantity per pack | 1 |
| Numerator – packs per outer box | 4 |
| Material no. (12NC) | 911401621403 |
| Net weight (piece) | 2.499 kg |



Dimensional drawing

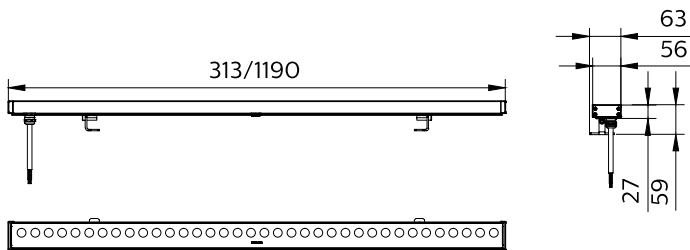

UNIstrip G2 BCP280

