



# **UNIstrip G3**

# BCP280 G3 5LEDHP/2700 L300 24V A

UNIstrip G3, 780 lm, 9.6 W, Warm white, Safety class III, Mounting bracket adjustable

UNI strip G3 is a LED wall washer lighting fixture designed for architectural lighting applications. UNIstrip G3 offers reliable quality and outstanding performance.

#### **Product data**

General Information	
Light source replaceable	No
Number of gear units	1 unit
Driver included	No
Light source engine type	LED
Lighting Technology	LED
CE mark	CE mark
Warranty period	3 years
Flammability mark	For mounting on normally flammable surfaces
Flammability mark	For mounting on normally flammable surfaces
Flammability mark	For mounting on normally flammable surfaces
Flammability mark EU RoHS compliant	For mounting on normally flammable surfaces
Flammability mark EU RoHS compliant Light Technical	For mounting on normally flammable surfaces Yes
Flammability mark EU RoHS compliant Light Technical Luminous Flux	For mounting on normally flammable surfaces Yes

81 lm/W

Warm white

Acrylic bowl/cover clear

80

Operating and Electrical	
Input Voltage	24 DC V
Inrush current	30 A
Inrush time	0.03 ms
Power Consumption	9.6 W
Power Factor (Fraction)	0.95
Connection	Flying leads/wires
Cable	Cable 1.0 m without plug
Temperature	
Ambient temperature range	-40 to +50 °C
Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Electronic transformer
Control interface	-
Constant light output	No
Mechanical and Housing	
Housing Material	Aluminum extruded
Optic material	Acrylate

Light source color

Optical cover type

Luminous Efficacy (rated) (Nom) Color rendering index (CRI)

## **UNIstrip G3**

Optical cover material	Acrylate	
Housing Color	Aluminum and black	
Mounting device	Mounting bracket adjustable	
Optical cover shape	Conical	
Optical cover finish	Clear	
Overall length	335 mm	
Overall width	50 mm	
Overall height	65 mm	
Dimensions (Height x Width x Depth)	65 x 50 x 335 mm	

IK06 [1 J]

+/-10%

Safety class III

IP66 [Dust penetration-protected, jet-proof]

Power consumption tolerance	+/-10%
Application Conditions	
Maximum dim level	Not applicable
Product Data	
Order product name	BCP280 G3 5LEDHP/2700 L300 24V A
Full product name	BCP280 G3 5LEDHP/2700 L300 24V A
Full product code	911401624004
Order code	911401624004
Material Nr. (12NC)	911401624004
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8

### Mech. impact protection code


Protection class IEC

Approval and Application Ingress protection code

Initial Performance (IEC Compliant)	

Luminous flux tolerance

## Dimensional drawing

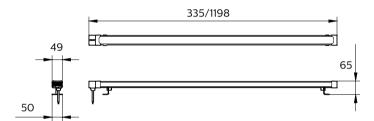



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.