



# CoreLine Downlight

## DN140B LED20S/840 PSU C PI6

840 neutral white - Power supply unit - High-gloss mirror - Push-in connector 6-pole - Finger-protected

The CoreLine Downlight range of recessed luminaires is designed to replace CFL-ni/CFL-i based downlight luminaires. Their attractive TCO helps customers to make the switch to LED. These luminaires create a natural lighting effect for use in general lighting applications. They also deliver instant energy savings and have a much longer lifetime, creating a real value-for-money and environmentally friendly solution. They are easy to install thanks to their standard cut-out size and push-in connectors.

### Product data

General Information	
Beam angle of light source	120°
Light source colour	840 neutral white
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	PSU [ Power supply unit]
Driver included	Yes
Optic type	C [ High-gloss mirror]
Luminaire light beam spread	60°
Control interface	-
Connection	Push-in connector 6-pole
Cable	-
Protection class IEC	Safety class I
Glow-wire test	Temperature 850 °C, duration 5 s
Flammability mark	F [ For mounting on normally flammable surfaces]

CE mark	CE mark
ENEC mark	-
Warranty period	5 years
Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value.
Constant light output	No
Number of products on MCB	48
RoHS mark	RoHS mark
Unified glare rating CEN	22

# CoreLine Downlight

## Operating and Electrical

Input voltage	220-240 V
Input frequency	50 to 60 Hz
Initial CLO power consumption	- W
Average CLO power consumption	- W
End CLO power consumption	- W
Inrush current	2.2 A
Inrush time	0.045 ms
Power factor (min.)	0.95

## Controls and Dimming

Dimmable	No
----------	----

## Mechanical and Housing

Housing material	Aluminium die-cast
Reflector material	Polycarbonate aluminium coated
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Optical cover/lens finish	Frosted
Overall length	0 mm
Overall width	0 mm
Overall height	108 mm
Overall diameter	216 mm
Colour	White RAL 9003

## Approval and Application

Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK02 [ 0.2 J standard]

## Initial Performance (IEC Compliant)

Initial luminous flux	2200 lm
-----------------------	---------

Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	116 lm/W
Init. Corr. colour temperature	4000 K
Init. colour rendering index	≥80
Initial chromaticity	(0.378,0.377) SDCM≤5
Initial input power	19 W
Power consumption tolerance	+/-10%

## Over Time Performance (IEC Compliant)


Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L70

## Application Conditions


Ambient temperature range	-20 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dimming level	Not applicable

## Product Data

Full product code	871016332593400
Order product name	DN140B LED20S/840 PSU C PI6
EAN/UPC – product	8710163325934
Order code	32593400
Numerator – quantity per pack	1
Numerator – packs per outer box	6
Material no. (12NC)	911401632305
Net weight (piece)	0.660 kg



## Dimensional drawing

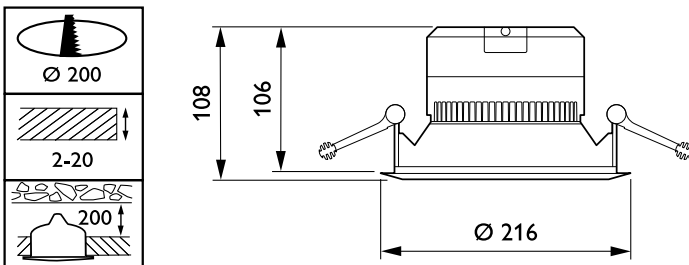

## CoreLine Downlight DN140B

## CoreLine Downlight

