



# Essential SmartBright LowBay

## BY088P LED30/NW

Essential SmartBright LowBay, 30 W, 2400 lm, 4000 K, 100°

Philips Essential SmartBright LowBay is a functional lighting by combining cost-efficiency with clean design. It offers customers all the benefits of LED lighting – reduced energy consumption, longer service time and less maintenance. Flexible, safe, and reliable, Essential SmartBright LowBay is a perfect LED replacement to conventional CFL LowBay system, allowing you to bright up your supermarkets, retail shops, and sports recreational spaces the smarter way.

### Product data


General Information			
Light source replaceable	No	Correlated Color Temperature (Nom)	4000 K
Number of gear units	1 unit	Luminous Efficacy (rated) (Nom)	80 lm/W
Driver included	Yes	Color rendering index (CRI)	≥80
Light source engine type	LED	Light source color	840 neutral white
Service tag	Yes	Optic type	Wide beam
CE mark	-	Optical cover type	Polycarbonate bowl/cover
Warranty period	1 years	Luminaire light beam spread	100°
Flammability mark	For mounting on normally flammable surfaces	Operating and Electrical	
ENEC mark	-	Input Voltage	220-240 V
Glow-wire test	Temperature 650 °C, duration 5 s	Line Frequency	50 or 60 Hz
EU RoHS compliant	No	Inrush current	24.8 A
Light Technical		Inrush time	95.78 ms
Luminous Flux	2,400 lm	Power Consumption	30 W
		Power Factor (Fraction)	0.9
		Connection	Flying leads/wires

Essential SmartBright LowBay

Cable	Cable 0.3 m without plug
Number of products on MCB of 16 A type B 95	
Temperature	
Ambient temperature range	-20 to +40 °C
Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Control interface	-
Constant light output	No
Mechanical and Housing	
Housing Material	Aluminum
Reflector material	Aluminum
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Fixation material	-
Housing Color	Gray and black
Optical cover finish	Frosted
Overall height	162 mm
Overall diameter	300 mm
Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK03 [0.3 J]

Protection class IEC	Safety class I
Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Initial chromaticity	SDCM<5
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Median useful life L70B50	15,000 hour(s)
Application Conditions	
Suitable for random switching	No
Product Data	
Order product name	BY088P LED30/NW
Full product name	BY088P LED30/NW
Full product code	692382862563400
Order code	911401667603
Material Nr. (12NC)	911401667603
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	6923828625634
Numerator - Packs per outer box	1
EAN/UPC - Case	6923828625634

Dimensional drawing

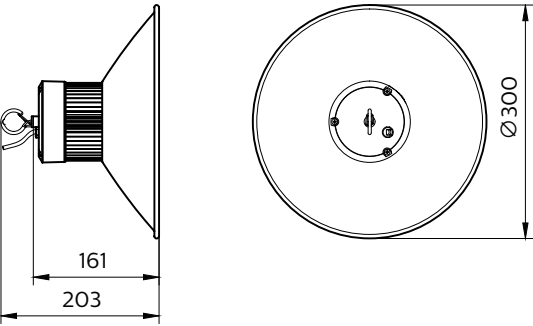

## Essential SmartBright LowBay

