



## Pentura Mini LED

### Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)

### Mechanical and Housing

Housing Material	Polycarbonate
Optical cover material	Glass
Housing Color	White

### Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Protection class IEC	Safety class II

### Initial Performance (IEC Compliant)

Initial chromaticity	(0.42, 0.40) SDCM <5
----------------------	----------------------



### Application Conditions

Performance ambient temperature Tq	25 °C
Suitable for random switching	No

### Product Data

Order product name	BN130C LED8S/830 PSU L885
Full product name	BN130C LED8S/830 PSU L885
Full product code	871016329650099
Order code	911401704782
Material Nr. (12NC)	911401704782
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8710163296500
Numerator - Packs per outer box	24
EAN/UPC - Case	8710163296586

### Dimensional drawing

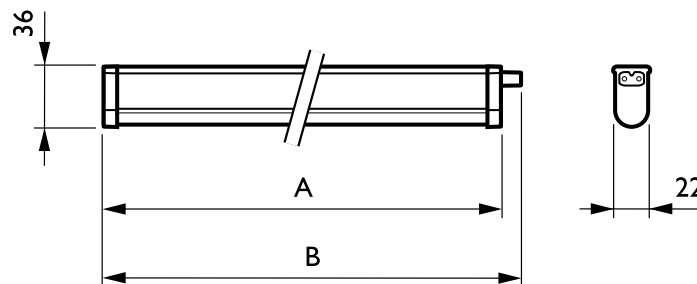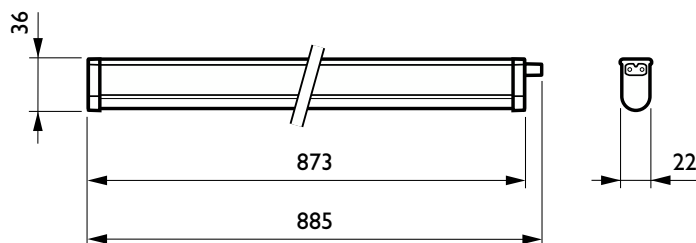

Product	A
BN130C LED8S/830 PSU L885	885 mm

