



UniPoint

BGP312 1LED 3000K WB GG

Our UniPoint is designed to produce both general and accent lighting while concealing the body of the device, allowing only the light to be exposed. This design can be used to change the surroundings by adding subtle or dramatic contrasting effects. It also includes exclusive features such as energy efficiency, chromatic quality and miniaturisation. We guarantee extreme reliability and high level of resistance to adverse weather conditions and vandalism

Product data

General Information		Inrush time	
Lamp colour code	830 warm white	Inrush time	10 ms
Light source replaceable	No	Power factor (min.)	0.97
Driver/power unit/transformer	ET [Electronic transformer]	Controls and Dimming	
Driver included	No	Dimmable	No
Optical cover/lens type	GB [Glass bowl/cover]	Mechanical and Housing	
Luminaire light beam spread	40°	Housing material	Aluminum die-cast
Connection	Flying leads/wires	Reflector material	Glass
Cable	Cable without plug 2-pole	Optical cover/lens material	Glass
Protection class IEC	Safety class III (III)	Mounting device	Allen screw fixation
CE mark	CE mark	Optical cover/lens shape	Conical
Warranty period	3 years	Optical cover/lens finish	Textured
Outdoor optic type	Wide beam angle 42°	Overall length	95.8 mm
Constant light output	No	Overall height	69.4 mm
RoHS mark	RoHS mark	Overall diameter	65.5 mm
LED engine type	LED	Approval and Application	
Operating and Electrical		Ingress protection code	IP66 [Dust penetration-protected , jet-proof]
Input voltage	Primary 230 V, secondary 24 V	Mech. impact protection code	IK06 [1 J]
Input frequency	45 to 66 Hz		
Inrush current	0.5 A		


Initial Performance (IEC Compliant)

Initial luminous flux	120 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	40 lm/W
Lamp colour temperature	3000 K
Colour Rendering Index	>80
Initial chromaticity	SDCM<5
Initial input power	3 W
Power consumption tolerance	+/-10%


Product Data

Full product code	911401711492
-------------------	--------------

Order product name	BGP312 1LED 3000K WB GG
Order code	911401711492
Numerator – quantity per pack	1
Numerator – packs per outer box	32
Material no. (12NC)	911401711492
Net weight (piece)	0.399 kg



Dimensional drawing

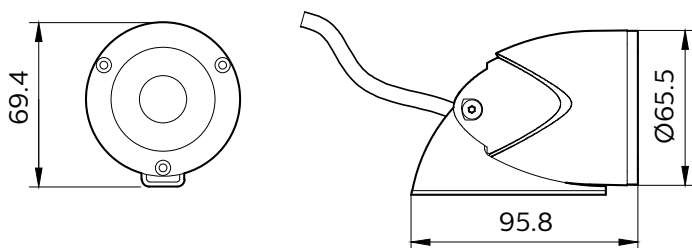

BGP312 UniPoint

