



UniPoint

BGP312 1LED 4000K NB GG

Our UniPoint is designed to produce both general and accent lighting while concealing the body of the device, allowing only the light to be exposed. This design can be used to change the surroundings by adding subtle or dramatic contrasting effects. It also includes exclusive features such as energy efficiency, chromatic quality and miniaturisation. We guarantee extreme reliability and high level of resistance to adverse weather conditions and vandalism

Product data

| General Information | |
|-------------------------------|-------------------------------|
| Lamp colour code | 840 neutral white |
| Light source replaceable | No |
| Driver/power unit/transformer | ET [Electronic transformer] |
| Driver included | No |
| Optical cover/lens type | GB [Glass bowl/cover] |
| Luminaire light beam spread | 10° |
| Connection | Flying leads/wires |
| Cable | Cable without plug 2-pole |
| Protection class IEC | Safety class III (III) |
| CE mark | CE mark |
| Warranty period | 3 years |
| Outdoor optic type | Narrow beam angle 10° |
| Constant light output | No |
| RoHS mark | RoHS mark |
| LED engine type | LED |
| Operating and Electrical | |
| Input voltage | Primary 230 V, secondary 24 V |
| Input frequency | 45 to 66 Hz |
| Inrush current | 0.5 A |

| Inrush time | 10 ms |
|------------------------------|--|
| Power factor (min.) | 0.97 |
| Controls and Dimming | |
| Dimmable | No |
| Mechanical and Housing | |
| Housing material | Aluminum die-cast |
| Reflector material | Glass |
| Optical cover/lens material | Glass |
| Mounting device | Allen screw fixation |
| Optical cover/lens shape | Conical |
| Optical cover/lens finish | Textured |
| Overall length | 95.8 mm |
| Overall height | 69.4 mm |
| Overall diameter | 65.5 mm |
| Approval and Application | |
| Ingress protection code | IP66 [Dust penetration-protected , jet-proof] |
| Mech. impact protection code | IK06 [1 J] |


Initial Performance (IEC Compliant)

| | |
|--------------------------------|---------|
| Initial luminous flux | 120 lm |
| Luminous flux tolerance | +/-10% |
| Initial LED luminaire efficacy | 40 lm/W |
| Lamp colour temperature | 4000 K |
| Colour Rendering Index | >80 |
| Initial chromaticity | SDCM<5 |
| Initial input power | 3 W |
| Power consumption tolerance | +/-10% |


Product Data

| | |
|-------------------|--------------|
| Full product code | 911401711502 |
|-------------------|--------------|

| | |
|---------------------------------|-------------------------|
| Order product name | BGP312 1LED 4000K NB GG |
| Order code | 911401711502 |
| Numerator – quantity per pack | 1 |
| Numerator – packs per outer box | 32 |
| Material no. (12NC) | 911401711502 |
| Net weight (piece) | 0.399 kg |



Dimensional drawing

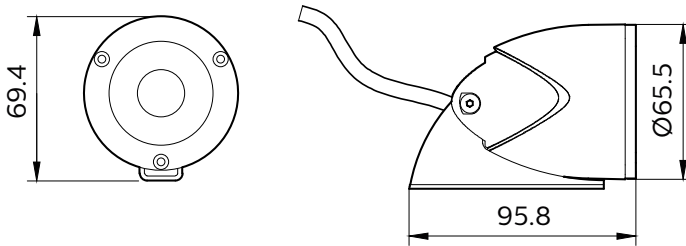

BGP312 UniPoint

