



UniPoint

BGP312 3LED 4000K MB GG

Our UniPoint is designed to produce both general and accent lighting while concealing the body of the device, allowing only the light to be exposed. This design can be used to change the surroundings by adding subtle or dramatic contrasting effects. It also includes exclusive features such as energy efficiency, chromatic quality and miniaturization. We guarantee extreme reliability and high level of resistance to adverse weather conditions and vandalism

Product data

General Information		Standard tilt angle side entry	
Light source color	840 neutral white		-
Light source replaceable	No	Operating and Electrical	
Driver/power unit/transformer	ET [Electronic transformer]	Input Voltage	24 DC V
Driver included	No	Input Frequency	45 to 66 Hz
Optical cover/lens type	GB [Glass bowl/cover]	Inrush current	0.7 A
Luminaire light beam spread	25°	Inrush time	10 ms
Control interface	-	Power Factor (Min)	0.97
Connection	Flying leads/wires	Controls and Dimming	
Cable	Cable without plug 2-pole	Dimmable	No
Protection class IEC	Safety class III (III)	Mechanical and Housing	
CE mark	CE mark	Housing Material	Aluminum die-cast
Warranty period	3 years	Reflector material	Glass
Optic type outdoor	Medium beam angle 25°	Optical cover/lens material	Glass
Constant light output	No	Mounting device	Allen screw fixation
RoHS mark	RoHS mark	Optical cover/lens shape	Conical
Light source engine type	LED	Optical cover/lens finish	Textured
Light Technical		Overall length	95.8 mm
Standard tilt angle posttop	-	Overall height	69.4 mm

UniPoint

Overall diameter	65.5 mm
Color	Dark gray

Approval and Application

Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK06 [1 J]

Initial Performance (IEC Compliant)


Initial luminous flux (system flux)	330 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	55 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>75
Initial chromaticity	SDCM<5
Initial input power	6 W
Power consumption tolerance	+/-10%

Application Conditions


Ambient temperature range	-40 to +45 °C
---------------------------	---------------

Product Data

Full product code	911401711602
Order product name	BGP312 3LED 4000K MB GG
Order code	911401711602
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	32
Material Nr. (12NC)	911401711602
Net Weight (Piece)	0.399 kg



Dimensional drawing

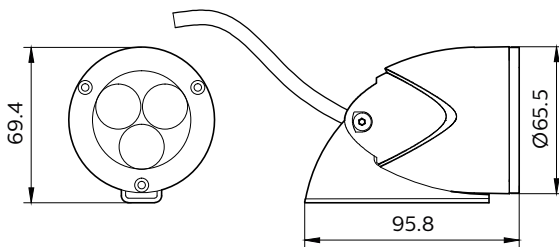

BGP312 UniPoint

