



# SmartBright LED Batten G2

## BN013C LED10/WW L600 G2

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. This new batten range of LED products can be used to replace traditional battens with fluorescent lamps. The process of selecting, installing and maintaining is so easy – it’s a simple switch

### Product data

General Information		Input Frequency	
Light source color	Warm white	Input Frequency	50 to 60 Hz
Light source replaceable	No	Power Factor (Min)	0.8
Number of gear units	1 unit	<b>Controls and Dimming</b>	
Driver/power unit/transformer	Power supply unit	Dimmable	No
Driver included	Yes	<b>Mechanical and Housing</b>	
Optic type	Wide beam	Housing Material	Polyamide
Luminaire light beam spread	140°	Optic material	Polycarbonate
Connection	Flying leads/wires	Optical cover/lens material	Polyamide
Cable	Cable without plug 2-pole	Fixation material	Steel
Protection class IEC	Safety class II	Optical cover/lens finish	Clear
Glow-wire test	Temperature 650 °C, duration 5 s	Overall length	600 mm
CE mark	CE mark	Overall width	30 mm
Warranty period	3 years	Overall height	37 mm
Constant light output	No	Color	White
Number of products on MCB of 16 A type B	10	<b>Approval and Application</b>	
RoHS mark	RoHS mark	Ingress protection code	IP20 [ Finger-protected]
<b>Operating and Electrical</b>			
Input Voltage	220 to 240 V		

## SmartBright LED Batten G2

Mech. impact protection code	IK00 [ No protection]
------------------------------	-----------------------

### Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	1000 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	100 lm/W
Init. Corr. Color Temperature	3000 K
Init. Color Rendering Index	>80
Initial chromaticity	SDCM<6
Initial input power	10 W
Power consumption tolerance	+/-10%

### Over Time Performance (IEC Compliant)

Median useful life L70B50	25000 h
---------------------------	---------


### Application Conditions

Ambient temperature range	+20 to +35 °C
---------------------------	---------------


Maximum dim level	Not applicable
Suitable for random switching	Not applicable

### Product Data

Full product code	911401808797
Order product name	BN013C LED10/WW L600 G2
EAN/UPC - Product	8710163308234
Order code	911401808797
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	911401808797
Net Weight (Piece)	0.130 kg



## Dimensional drawing

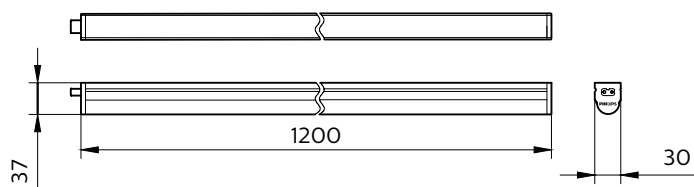

BN012C/BN013C G2

