



# Greenperform Waterproof G2 - WT188C

## WT188C LED60 NW L1500 PSU MW

Greenperform Waterproof G2 luminaire and its components are designed for both indoor and semi-outdoor application (anti-UV PC material housing and diffuser, stainless steel installation accessory). We design for friendly optical, energy saving, reliable quality, and easy wiring. Beyond that, GreenParking wireless motion detective system is ready to provide the maximum energy saving and new lighting experience to you.

### Product data

General Information		Warranty period	
Beam angle of light source	- °	Warranty period	3 years
Lamp colour code	Neutral white	Constant light output	No
Light source replaceable	No	Number of products on MCB	24
Number of gear units	1 unit	RoHS mark	RoHS mark
Driver/power unit/transformer	PSU [ Power supply unit]	Operating and Electrical	
Driver included	Yes	Input voltage	220-240 V
Optic type	Symmetrical	Input frequency	50 to 60 Hz
Luminaire light beam spread	120°	Inrush current	19 A
Control interface	-	Inrush time	0.28 ms
Connection	Flying leads/wires	Power factor (min.)	0.95
Cable	Cable 0.2 m without plug	Controls and Dimming	
Protection class IEC	Safety class I (I)	Dimmable	No
Glow-wire test	750/5 [ Temperature 750 °C, duration 5 s]	Mechanical and Housing	
Flammability mark	NO [-]	Housing material	Polycarbonate
CE mark	CE mark		
ENEC mark	-		

## Greenperform Waterproof G2 - WT188C

Reflector material	Steel
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Stainless steel
Optical cover/lens finish	Opal
Overall length	1446 mm
Overall width	84 mm
Overall height	83 mm

### Approval and Application

Ingress protection code	IP65 [ Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [ 5 J vandal-protected]

### Initial Performance (IEC Compliant)

Initial luminous flux	5400 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	108 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	>80
Initial chromaticity	SDCM<5

Initial input power	50 W
Power consumption tolerance	+/-10%

### Application Conditions


Ambient temperature range	-30 to +40 °C
Maximum dimming level	Not applicable
Suitable for random switching	Not applicable

### Product Data

Full product code	911401831897
Order product name	WT188C LED60 NW L1500 PSU MW
Order code	911401831897
Numerator – quantity per pack	1
Numerator – packs per outer box	1
Material no. (12NC)	911401831897
Net weight (piece)	1.699 kg



### Dimensional drawing

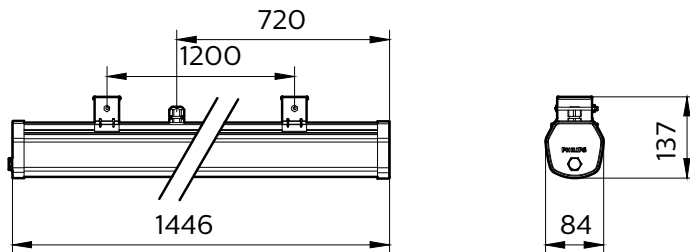

WT188C

